

The F50T is a compact LED fresnel, 50W WW + 50W CW tunable LED. 25°- 80° zoom, CRI 92, 90≥ R9, rotary control of dim-mer. It deliver a smooth, soft flat field of light. Barn door included for the shape of the light.


Key features:

- 50W WW + 50W CW
- CRI 92, R9≥90
- 25° - 80° manual zoom
- Color temperature 2700K ~ 6500K tunable
- Super compact, easy for set up
- Rotary dimmer
- 4-leaf rotatable barndoor included

Application:

- News interview
- Micro film shooting
- Small event
- Wedding shooting
- Exhibition lighting

Accessories:

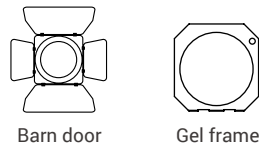


F50T

50W tunable fresnel zoom




Photometric


ww(lx)	6419	2986	946	543	352	240
cw(lx)	8804	2843	1312	759	495	329
Full on(lx)	7063	2216	1069	618	396	270

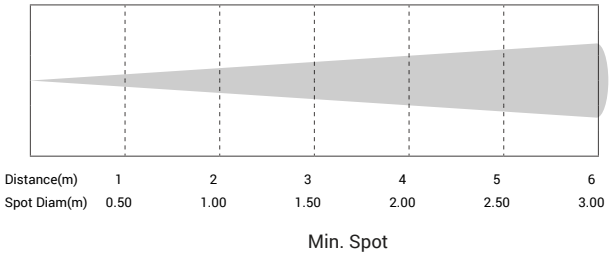

ww(lx)	1955	602	291	165	114	80
cw(lx)	2688	866	395	230	155	110
Full on(lx)	2150	698	319	185	126	90

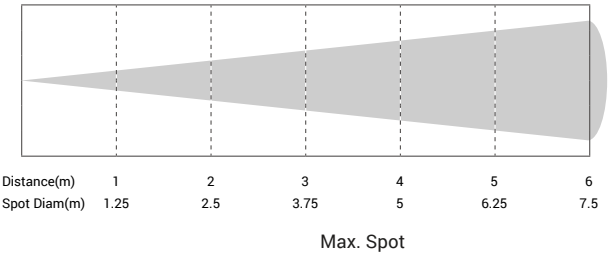

Color Rendition

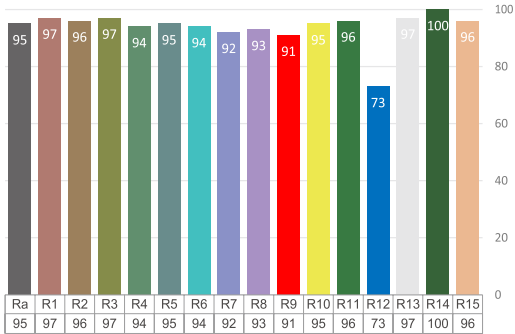

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	50W WW + 50W CW
Color temperature:	2700K ~ 6500K tunable
Zoom range:	25° - 80° manual zoom
Color Rendition:	CRI 92, R9≥90
Power connection:	PowerCON in
Control mode:	Rotary

Size:	303 x 134 x 280mm
N.W.:	1.9kg (barn door incl.)
Accessories:	Power cable, barn door, Gel frame, Safety rope
Compliance:	CE
Environment:	IP20
Housing:	Colour black, Aluminum

