

2700K - 6000K

RDM
Control

COB
100W LED

ZOOM

Flicker Free

90+
CRI

Event 100T Profile is a new member of the CTC profile family. It’s powered by an 200W 2700K - 6000K tunable white LED source with HD optics, bright and constant 100W output. Zoom lens available in 15° - 30° or 25° - 50°.

The fixture comes with average high CRI over 90.



Key features:

- 200W COB LED (100W WW + 100W CW), 100W constant output
- 2700K - 6000K color temperature
- Average CRI over 90
- HD optical system, clean shutter cuts beam
- 15° - 30° or 25° - 50° zoom lens
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Intelligent fan, silent operation for studio and theatre use
- Super compact body, only 3.5 kg, easy to install and setup
- IP rated powercon in, DMX in & out

Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition


Accessories:

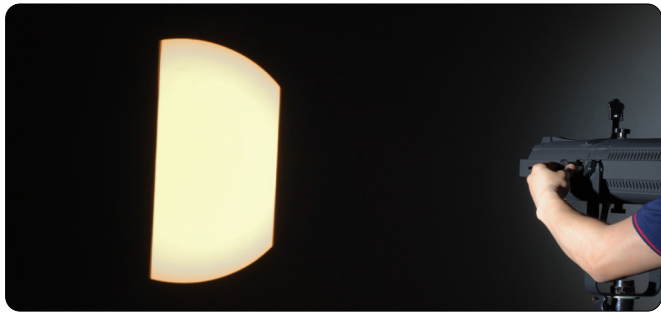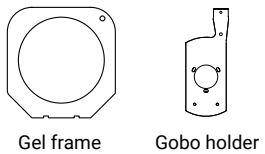


Event 100T Profile

100W tunable white LED profile zoom

Photometric

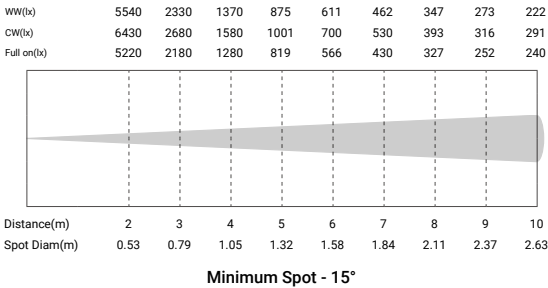


Color Rendition 5600K

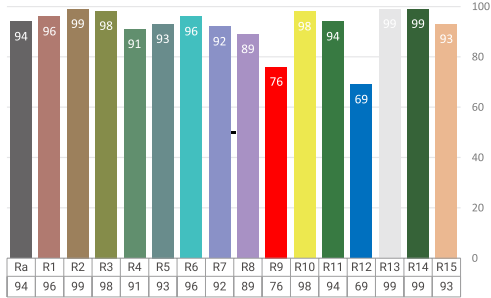

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	100W WW + 100W CW
Color temperature:	2700K - 6000K
Zoom range:	15° - 30° or 25° - 50° manual zoom
Color Rendition:	CRI over 90, CQS 90(5600K)
Power connection:	IP rated powercon in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5
Control mode:	Rotary, DMX, RDM

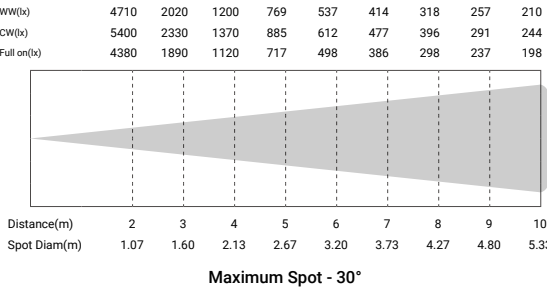

Size:	459 x 221 x 342mm
Package(carton):	560 x 280 x 330mm
N.W.:	3.5 kg
G.W.:	5 kg
Accessories	Power cable, gel frame, Safety rope, Gobo holder
GOBO Size:	OD 38mm
Environment:	IP20
Housing:	Color black, engineering plastic