

RDM
Control

COB
200W LED

ZOOM

Flicker Free

97
TLCI

Powered by 200W 3200K or 5600K LED, the Honor 300 Zoom is designed to replace the 1K Tungsten Halogen profile light. The 18°-38° “all-in-one” zoom range covers the most regular 19°, 26°, 36° lens. It creates a flat and even field of light and crisp pattern projection.


Key features:

- 200W COB white LED
- CRI 96, R9≥91, TLCI up to 97
- HD optical system, clean shutter cuts beam
- 18° - 38° "all-in-one" zoom range
- 16 bit dimming via DMX
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Silent operation for studio and theatre use
- Engine and lens compatible with industry standard


Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition lighting

Accessories:



Gel frame



Gobo holder (opt.)




Iris (opt.)



HONOR 200 ZOOM

WW / CW



200W LED profile zoom



Photometric

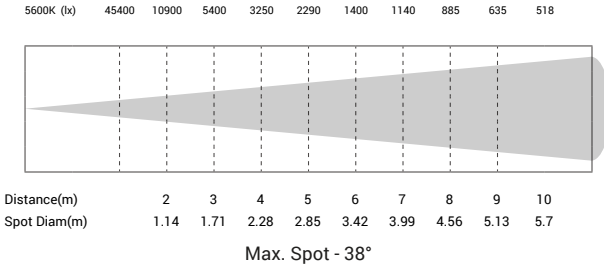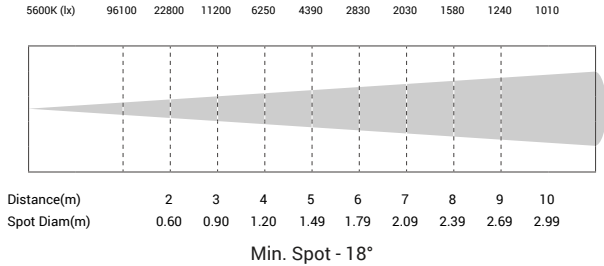

Color Rendition

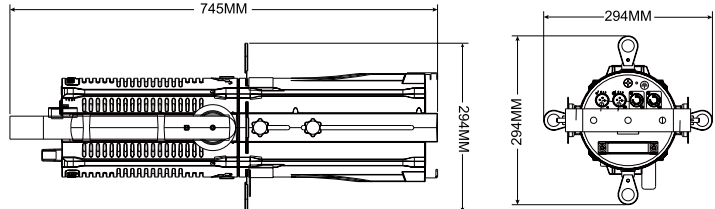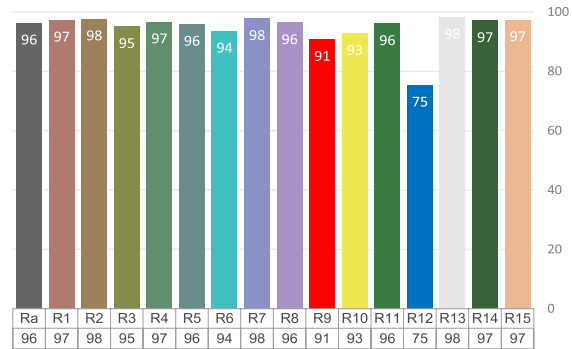

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	200W COB LED
Color temperature:	3200K or 5600K
Zoom range:	18°-38° manual
Color Rendition:	CRI 96, R9≥91, TLCI 97
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin opt.)
Control channels:	1/2/3
Control mode:	Rotary, DMX, RDM

Housing:	Color black, engineering plastic
Size:	745 x 294 x 294mm
Package(carton):	790 x 350 x 360mm
N.W.:	8.7 kg
G.W.:	11.5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
Compliance:	CE
Environment:	IP20