

3200K/5600K

RDM

Control

COB

40W LED

ZOOM

Flicker Free

98

TLCI

95

CRI

Designed for short distance wash. The mini Fresnel 40Z is a compact LED fresnel and powered by 40W 3200K tungsten or 5600K daylight LED. Featuring 25-80° zoom, 95CRI, 90 R9, rotary control of dimmer. It deliver a smooth, soft flat field of light. Barn door included for the shape of the light.


Key features:

- 40W COB white LED
- CRI 95, R9≥90, TLCI 98, CQS 94
- 25° - 80° manual zoom
- Smooth dimming, flicker free
- Super compact, easy for set up
- Rotary, key, DMX control of dimmer
- DMX-RDM compliant
- 4-leaf rotatable barndoor included
- Track mount version selectable


Application:

- News interview
- Micro film shooting
- Small event
- Wedding shooting
- Exhibition lighting

Accessories:




barn door



Gel frame



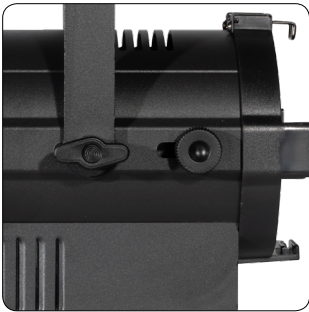





MINI FRESNEL 40Z


WW / CW

40W LED fresnel zoom



| 2


Photometric

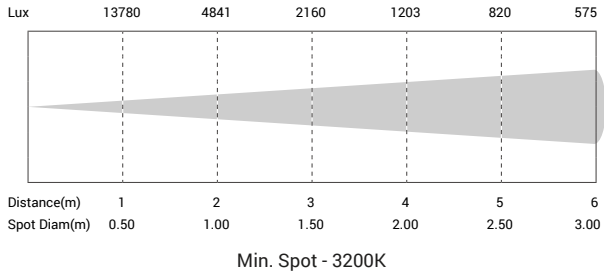

Distance(m)	1	2	3	4	5	6
Lux	13780	4841	2160	1203	820	575
Spot Diam(m)	0.50	1.00	1.50	2.00	2.50	3.00

Min. Spot - 3200K


Color Rendition

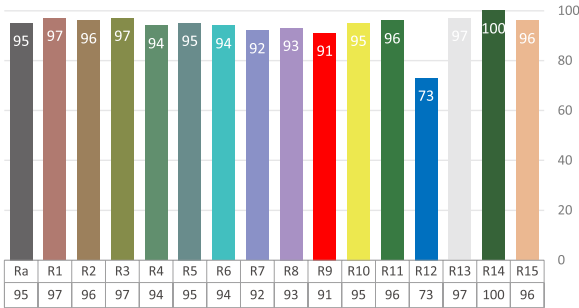

Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95	97	96	97	94	95	94	92	93	91	95	96	73	97	100	96


Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	40W COB LED
Color temperature:	3200K or 5600K
Zoom range:	25°- 80° manual zoom
Color Rendition:	CRI 95, R9≥90, TLCI 98, CQS 94
Power connection:	PowerCON in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	1/2/3/4
Control mode:	DMX, RDM, Rotary
Dimmer speed:	4 grade

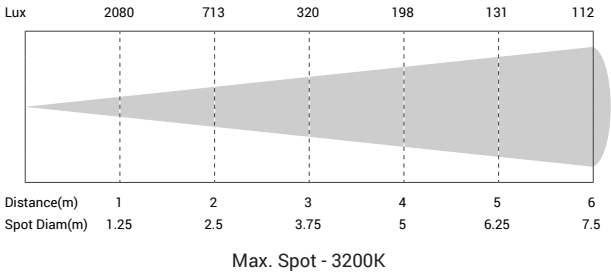

Distance(m)	1	2	3	4	5	6
Lux	2080	713	320	198	131	112
Spot Diam(m)	1.25	2.5	3.75	5	6.25	7.5

Max. Spot - 3200K

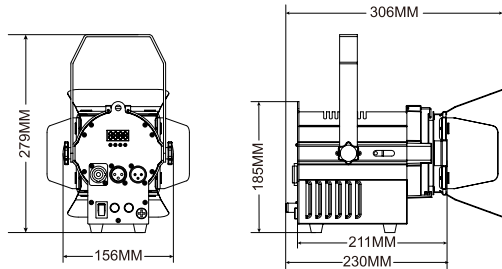

Housing:	Colour black, Aluminum
Size:	230 x 156 x 279mm
Package(carton):	335 x 218 x 220mm
N.W.:	2.2 kg(barn door incl.)
G.W.:	2.8 kg
Accessories(incl.):	Power cable, barn door, Gel frame
Accessories(opt.):	Clamp, Safety rope
Compliance:	CE
Environment:	IP20

THEATRICAL LIGHTING

THEATRICAL LIGHTING