



光谱图

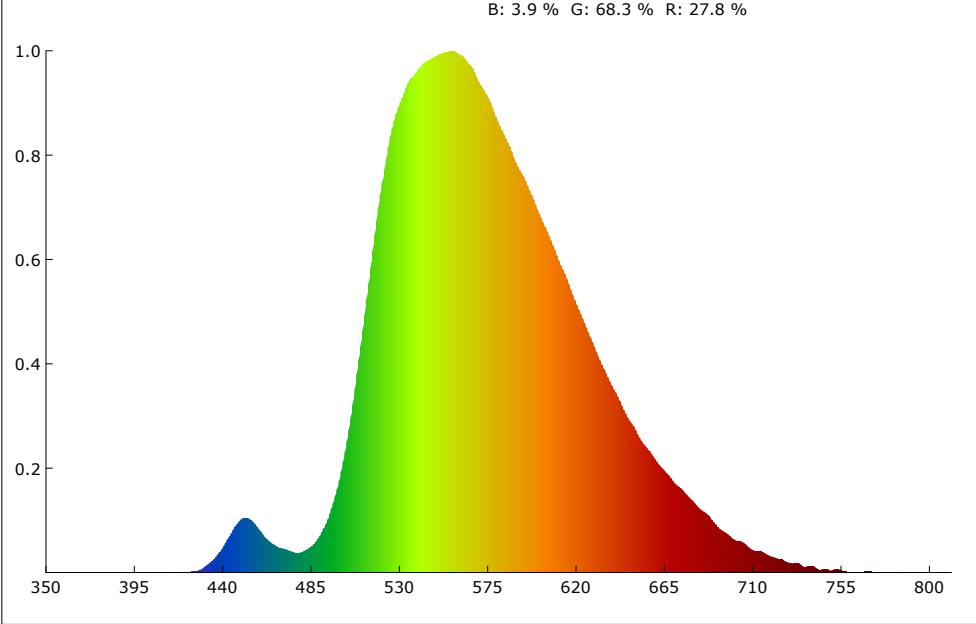

SDCM

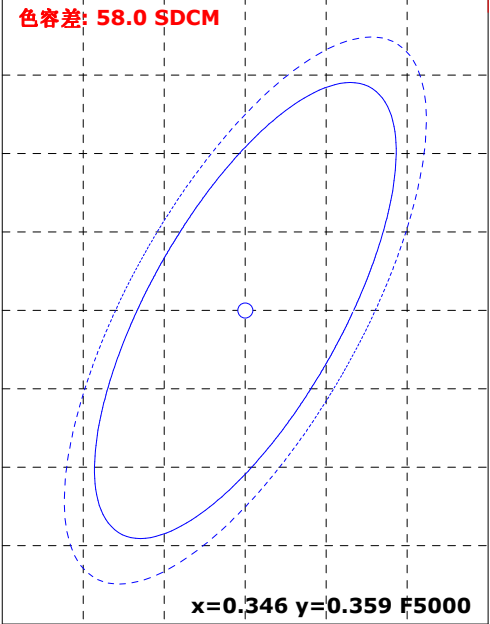

颜色参数:

坐标x: 0.4214 坐标y: 0.5275 坐标u: 0.1986 坐标v: 0.3729 坐标u': 0.1986 坐标v': 0.5594
红色比: 27.8 % 绿色比: 68.3 % 蓝色比: 3.9 % 光通量红色比: 11.7 % 光通量绿色比: 88.0 % 光通量蓝色比: 0.3 %

显色指数: 54.0 AvgR: 36.3
R1: 44.0 R2: 59.8 R3: 77.5 R4: 44.3 R5: 42.9 R6: 48.7 R7: 80.9 R8: 34.1
R9: -99.0 R10: 12.1 R11: 29.5 R12: 4.2 R13: 45.5 R14: 88.7 R15: 31.6


色温: 4011 K 光通量: 1581.675 lm 峰值波长: 556.5 nm 色容差: 58.0
明暗视觉比: 1.2 中心波长: 567.1 nm 主波长: 569.0 nm 质心波长: 574.5 nm
半宽度: 108.0 nm 色偏差: 0.04674 色纯度: 85.0 % 色质指数: 63.2
LER(TM-30): 455.6 辐射功率: 3472.0 mw 色域指数(Rg): 63.9 逼真度(Rf): 57.5
红光辐射功率: 952.2 mw 近红辐射功率: 43.2 mw 远红辐射功率: 0.1 mw

电参数:

光效: 25.3 Lm/W 能效: 27.6 能效等级: G
电压: 220.9 V 电流: 0.465 A 功率: 62.460 W 功率因素: 0.606

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: 57.5 CCT: 4011K u': 0.1986
Rg: 63.9 LER: 455.6 Duv: 0.04674 v': 0.5594

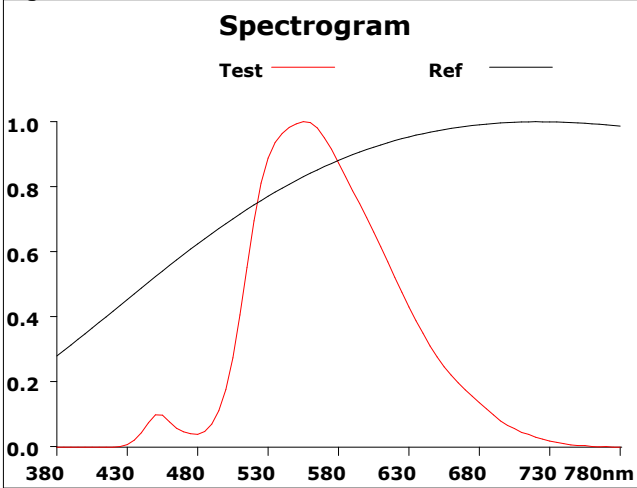

500			
Hue Bin	Rf	Chroma	Hue
1	51.1	-24.8%	-2.8%
2	57.3	-20.6%	-2.5%
3	48.3	-24.8%	-1.0%
4	55.7	-25.4%	0.4%
5	55.3	-29.6%	4.7%
6	53.1	-28.6%	6.5%
7	51.1	-27.6%	11.0%
8	54.0	-23.7%	9.8%
9	59.2	-21.6%	16.7%
10	44.6	-20.3%	24.3%
11	64.8	-9.5%	18.4%
12	73.1	-7.1%	8.9%
13	77.0	-8.5%	-4.7%
14	75.8	-6.4%	-8.8%
15	62.5	-14.9%	-14.5%
16	57.4	-17.7%	-11.3%

