



光谱图

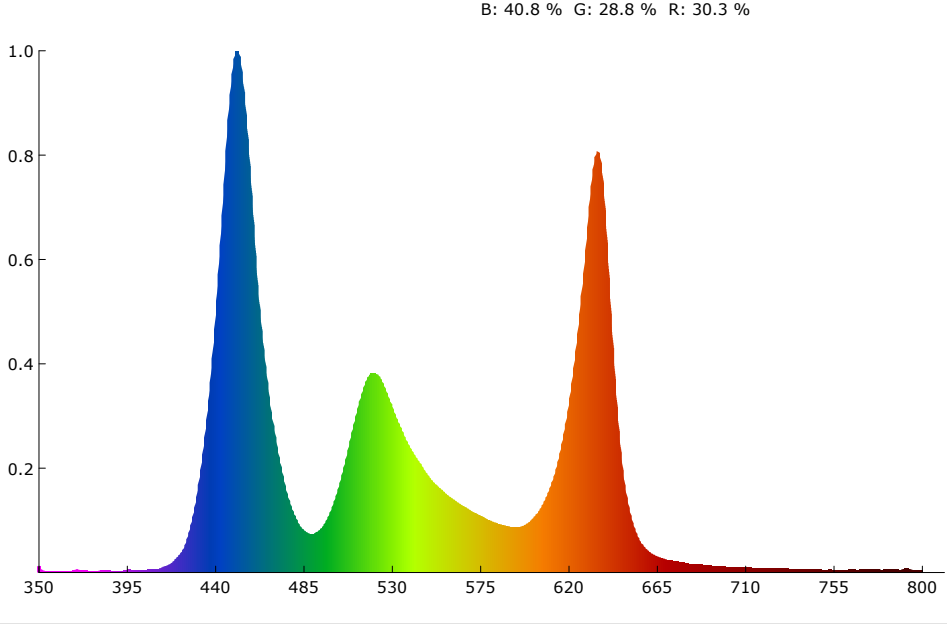

SDCM

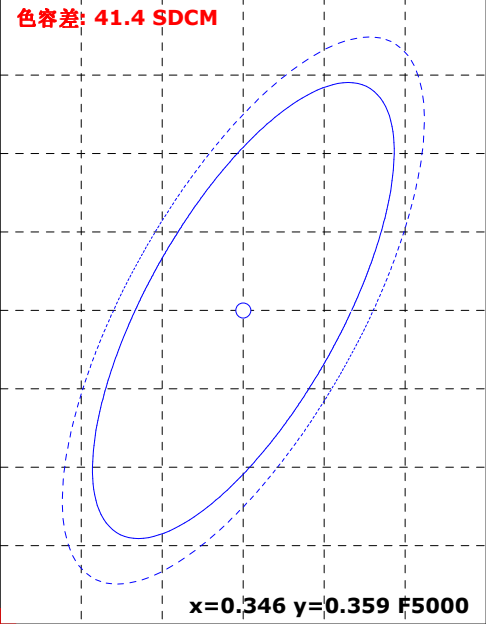

颜色参数:

坐标x: 0.2838 坐标y: 0.2403 坐标u: 0.2135 坐标v: 0.2712 坐标u': 0.2135 坐标v': 0.4068
红色比: 30.3 % 绿色比: 28.8 % 蓝色比: 40.8 % 光通量红色比: 23.5 % 光通量绿色比: 70.4 % 光通量蓝色比: 6.2 %

显色指数: 42.4 AvgR: 31.6
R1: 25.0 R2: 72.6 R3: 53.1 R4: 23.1 R5: 43.8 R6: 75.0 R7: 60.4 R8: -13.8
R9: -99.0 R10: 54.8 R11: 6.7 R12: 68.3 R13: 35.9 R14: 68.2 R15: -0.4


色温: 15728 K 光通量: 2191.096 lm 峰值波长: 451.6 nm 色容差: 41.4
明暗视觉比: 3.0 中心波长: 451.9 nm 主波长: 443.0 nm 质心波长: 534.7 nm
半宽度: 22.6 nm 色偏差: -0.02996 色纯度: 29.0 % 色质指数: 84.6
LER(TM-30): 222.6 辐射功率: 9842.4 mw 色域指数(Rg): 125.4 逼真度(Rf): 61.2
红光辐射功率: 2941.4 mw 近红辐射功率: 90.4 mw 远红辐射功率: 19.2 mw

电参数:







光效: 21.7 Lm/W 能效: 23.6 能效等级: G
电压: 220.8 V 电流: 0.716 A 功率: 100.900 W 功率因素: 0.638

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: 61.2 CCT: 15728K u': 0.2135
Rg: 125.4 LER: 222.6 Duv: -0.02996 v': 0.4068

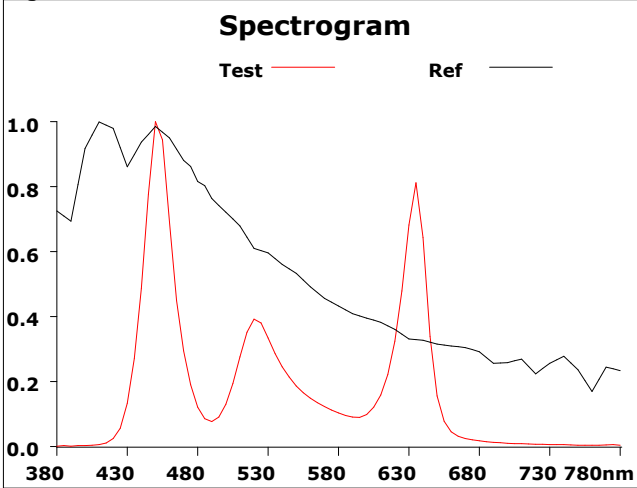

500			
Hue Bin	Rf	Chroma	Hue
1	30.8	35.3%	4.5%
2	52.5	19.1%	-9.1%
3	58.4	15.0%	-17.2%
4	78.6	4.4%	-5.7%
5	78.3	-1.3%	1.9%
6	66.1	11.0%	16.5%
7	61.3	2.9%	8.5%
8	64.3	17.2%	11.6%
9	77.4	10.6%	5.5%
10	82.3	3.8%	11.1%
11	66.1	3.4%	14.5%
12	63.2	-4.3%	29.2%
13	42.9	-2.1%	34.5%
14	29.6	9.0%	42.6%
15	30.7	39.1%	44.0%
16	40.8	23.4%	14.7%

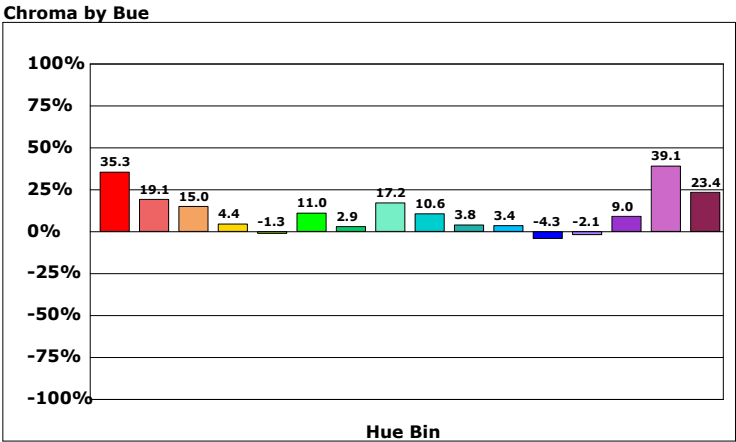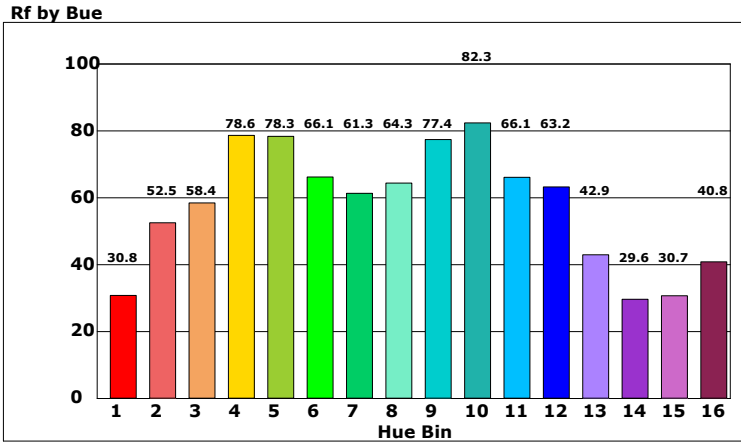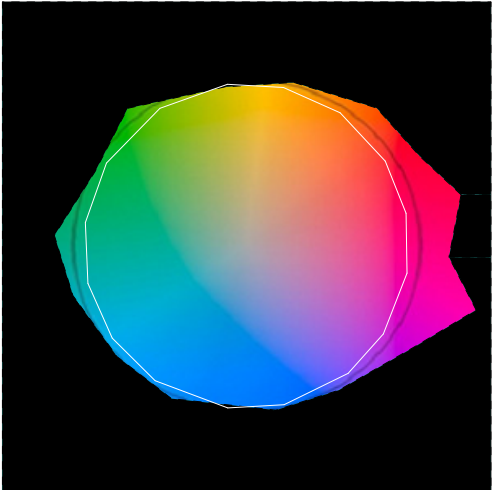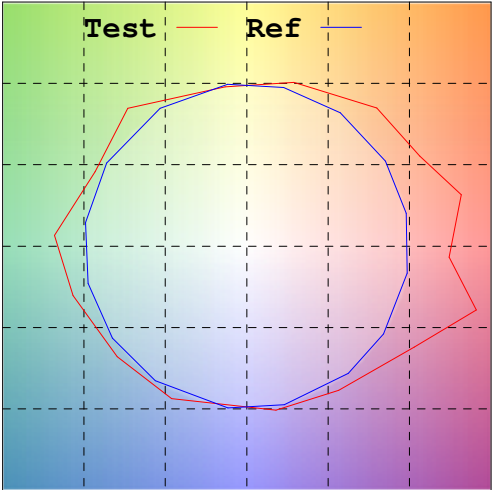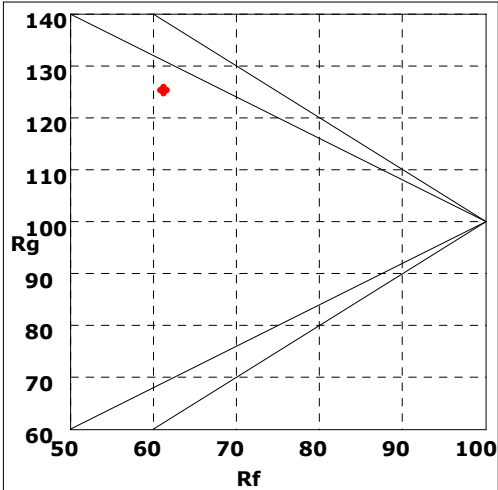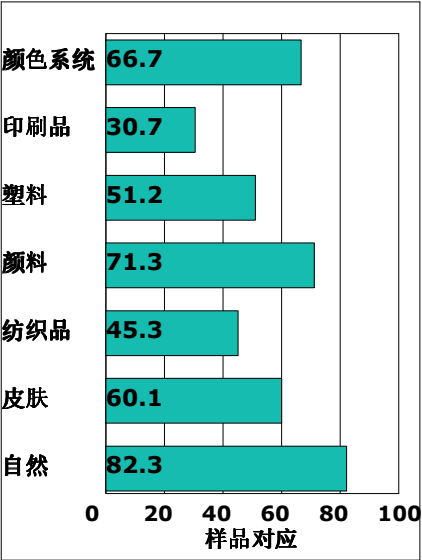

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/17/14

