



光谱图

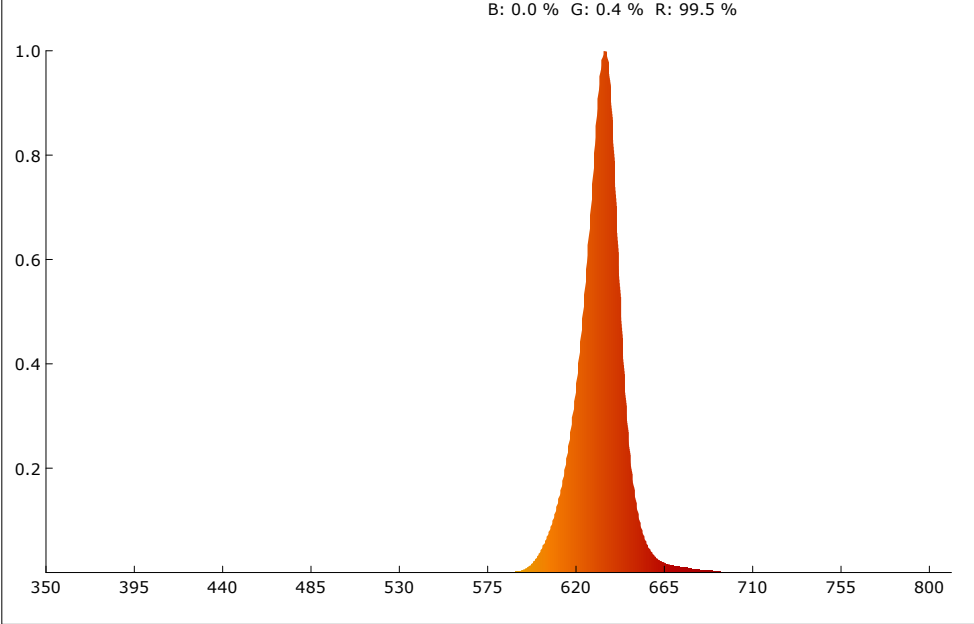

SDCM

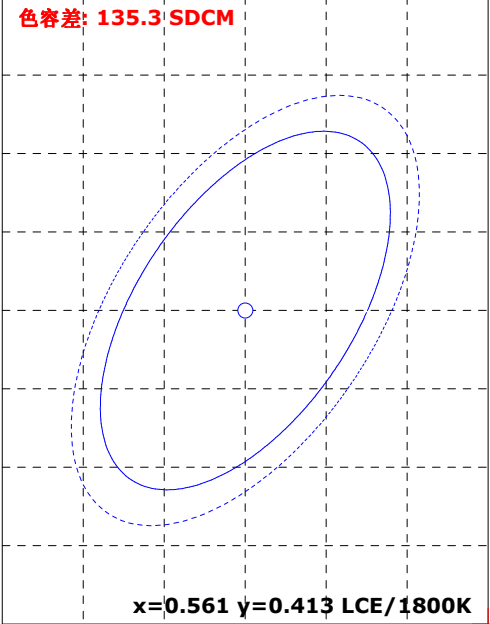

颜色参数:

坐标x: 0.7019 坐标y: 0.2980 坐标u: 0.5428 坐标v: 0.3457 坐标u': 0.5428 坐标v': 0.5185
红色比: 99.5 % 绿色比: 0.4 % 蓝色比: 0.0 % 光通量红色比: 98.5 % 光通量绿色比: 1.5 % 光通量蓝色比: 0.0 %

显色指数: 7.6 AvgR: 7.9
R1: -3.1 R2: 74.1 R3: 27.9 R4: -34.5 R5: -4.6 R6: 88.9 R7: -3.0 R8: -84.7
R9: -99.0 R10: 66.8 R11: -20.9 R12: 79.5 R13: 22.1 R14: 57.0 R15: -47.7


色温: 1000 K 光通量: 813.365 lm 峰值波长: 635.5 nm 色容差: 135.3
明暗视觉比: 0.0 中心波长: 633.7 nm 主波长: 625.8 nm 质心波长: 632.9 nm
半宽度: 19.0 nm 色偏差: -0.03300 色纯度: 100.0 % 色质指数: -nan(ind)
LER(TM-30): 171.4 辐射功率: 4746.5 mw 色域指数(Rg): 0.2 逼真度(Rf): 3.8
红光辐射功率: 4723.9 mw 近红辐射功率: 1.1 mw 远红辐射功率: 0.0 mw

电参数:




光效: 13.2 Lm/W 能效: 14.4 能效等级: G
电压: 220.9 V 电流: 0.459 A 功率: 61.590 W 功率因素: 0.607

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:


Rf: 3.8 CCT: 1000K u': 0.5428
Rg: 0.2 LER: 171.4 Du': 0.03300 v': 0.5185

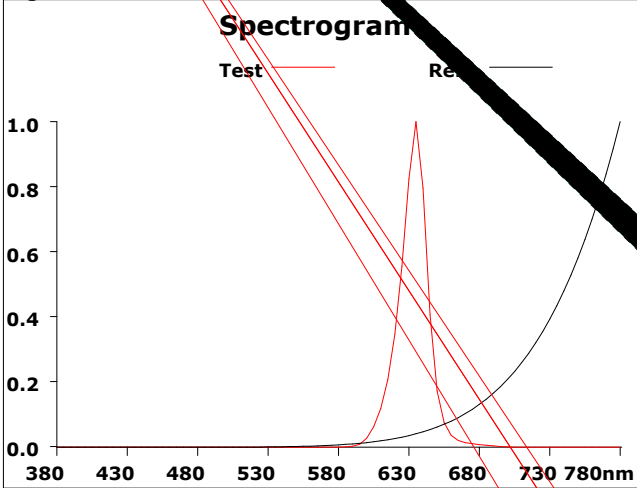

500			
Hue Bin	Rf	Chroma	Hue
1	2.1	-80.3%	4.7%
2	44.5	-88.2%	-7.2%
3	65.8	-100.5%	4.1%
4	100.0	nan%	-nan(ind)%
5	75.0	-90.6%	18.4%
6	100.0	nan%	-nan(ind)%
7	53.5	-47.4%	24.1%
8	0.6	-72.9%	-4.0%
9	0.1	-83.7%	0.2%
10	1.2	-101.6%	4.0%
11	38.7	-99.7%	7.7%
12	30.4	-98.9%	-83.8%
13	3.6	-116.1%	-29.5%
14	1.8	-94.9%	11.2%
15	51.4	-67.6%	3.3%
16	1.7	-100.6%	-8.4%

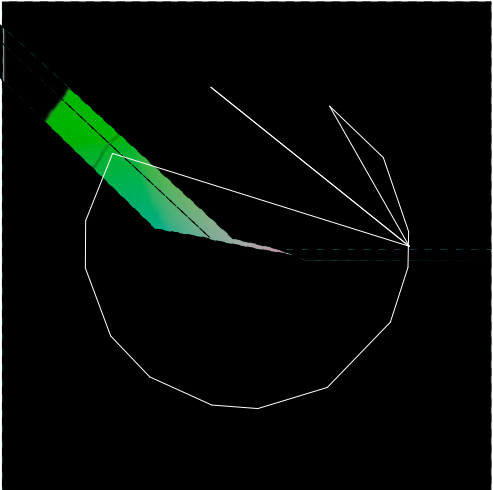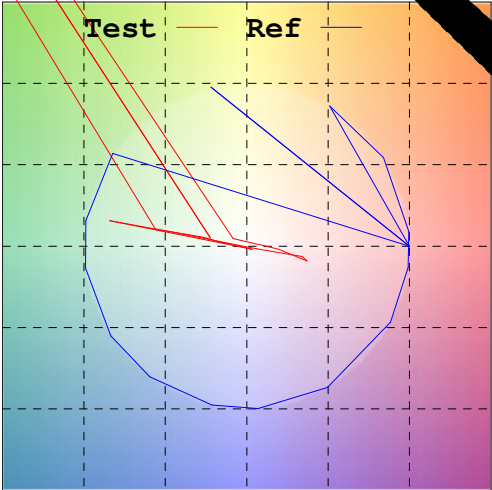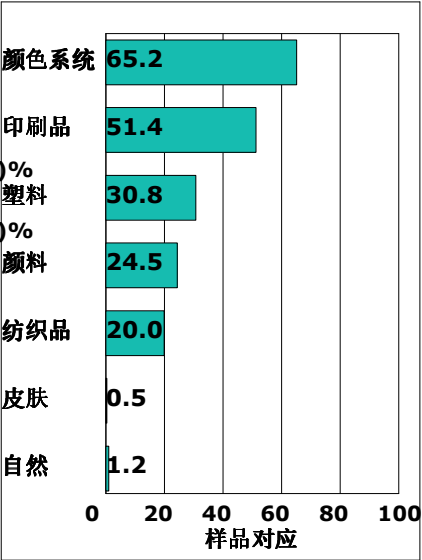

Rf by Bue

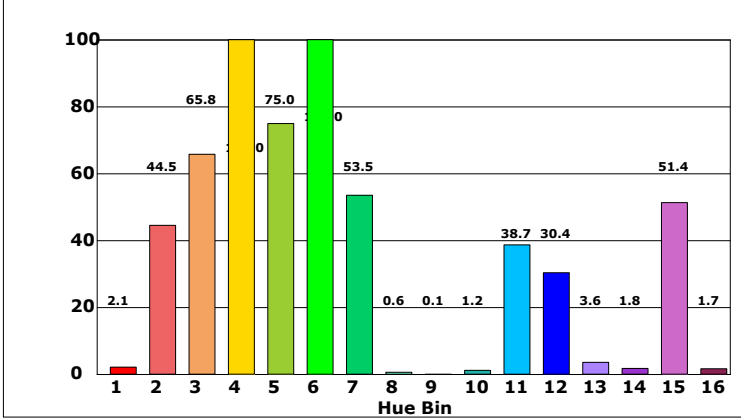

Chroma by Bue



ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173