
www.QuantumMicrowave.com

Specifications:

- WR-19 Waveguide to 1.85mm Female Adapter
- Frequency: 40 to 60 GHz
- Insertion Loss: 0.5 dB typical, 0.8 dB max
- Return Loss: 18 dB typical, 6 dB minimum
- Connector: 1.85mm Female
- Waveguide WR-19, UG-383/U-M, Round
- Copper Waveguide with Brass Flanges
- Finish: Gold Plated



QMC-WC19-1.85FR is a Female Waveguide to Coaxial adapter designed to operate within the U Band, with a frequency range of 40 to 60 GHz. This adapter is a WR-19 waveguide with precision tolerances. QMC-WC19-1.85FR is a gold plated, copper waveguide with brass flanges. This is a lab asset that will last for long periods of time.

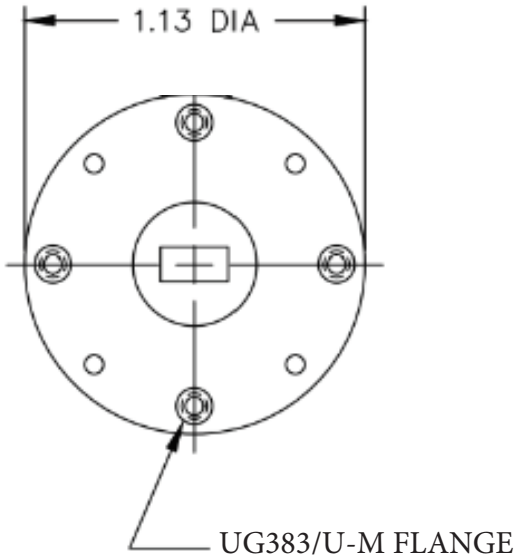

Made in the USA

✉ Sales@QuantumMicrowave.com