



Panto Fresnel 60T zoom

60W tunable LED fresnel IP65

Panto Fresnel 60T zoom is a IP65 60W tunable white LED fresnel spotlight. Die-casting housing, manual zoom 10° - 60°, fan-free design. Color temperature adjustable from 2700K - 6000K. It's an idea product for outdoor events, exhibitions, museum, shopping mall.


Key features:

- 60W WW + 60W CW constant output LED
- 2700K - 6000K adjustable
- High CRI over 92
- Die-casting aluminum housing, fan-free
- Rotate manual zoom 10° - 60°
- Smooth dimming, flicker free
- Compact body, easy to set up
- DMX control of dimmer, RDM support
- IP65, indoor or outdoor use

Application:

- Museum
- Theatre, church
- Shopping mall
- Art gallery
- Restaurant

Accessories:



Barn door




Gel frame



Photometric


WW(lx)	11800	3640	1550	862	542
CW(lx)	14400	4360	1890	1060	628
Full on (lx)	13500	3890	1760	976	594

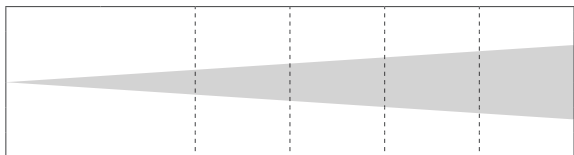

Distance(m)	1	2	3	4	5
Spot Diam(m)	0.17	0.35	0.52	0.70	0.87

Min. Spot - 10°


WW(lx)	2550	806	341	201	132
CW(lx)	3060	965	415	241	158
Full on (lx)	2860	905	389	277	148

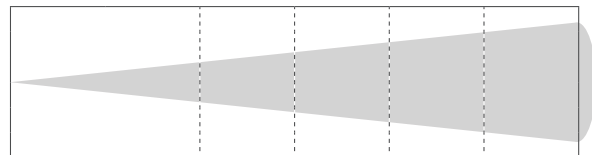

Distance(m)	1	2	3	4	5
Spot Diam(m)	1.15	2.30	3.45	4.60	5.75

Max. Spot - 60°

Color Rendition - 4000K

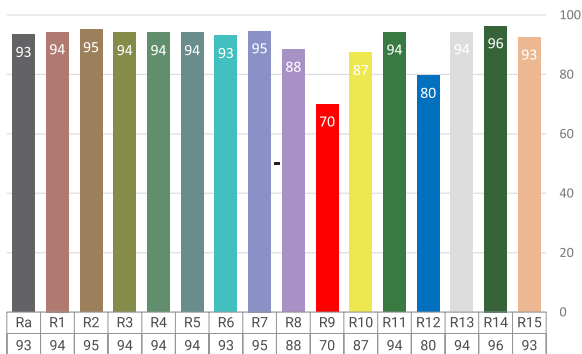

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	60W WW + 60W CW LED
Color temperature:	2700K - 6000K adjustable
Zoom range:	10° - 60° manual zoom
Color Rendition:	Avg. CRI 92
Power connection:	IP rated power in
Signal connection:	3-pin XLR in(5-pin optional)
Control channels:	1/2/3/5

Control mode:	DMX, RDM
Housing:	Color black, die-casting aluminum
Size:	239 x 163.5 x 293mm
N.W.:	2.7 kg
G.W.:	3.5 kg
Accessories(incl.):	Power cable, Safety rope, Barndoor, Gel frame
Environment:	IP65

