RDM Control | ZOOM | Flicker Free

Event 200C Profile

200W LED profile zoom

Event 200C Profile is a RGBL LED. Zoom lens available in 15° - 30° or 25° - 50°. Super compact body, only 3.5 kg, easy to install and setup.



Key features:

- 200W LED
- 2200K - 7500K color temperature
- 15° - 30° or 25° - 50° zoom lens, single side zoom
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Intelligent fan, silent operation for studio and theatre use
- Super compact body, only 3.5 kg, easy to install and setup
- Power in, DMX in & out

Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition

Accessories:




Gel frame



Gobo holder (opt.)






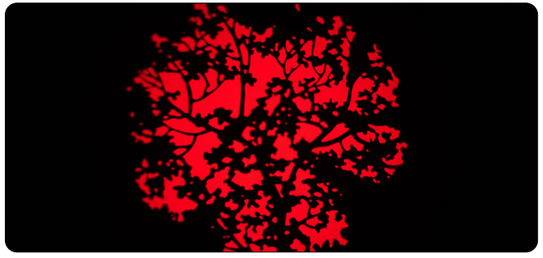


Photometric

R(lx)	4160	1160	458	282	166	125	90	70	49	45
G(lx)	7620	2060	907	516	324	231	164	127	104	83
B(lx)	1920	504	221	119	77	54	38	30	24	19
L(lx)	12800	3270	1440	798	517	363	260	203	160	131
Full on(lx)	2300.	6110	2620	1450	938	665	482	386	293	247

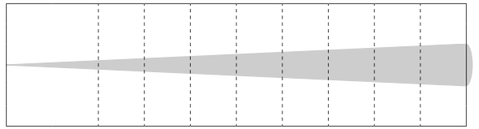

15°

R(lx)	3070	990	416	247	149	112	82	67	48	43
G(lx)	5930	1810	777	463	282	211	155	121	102	82
B(lx)	1480	424	186	106	69	47	34	27	22	18
L(lx)	9050	2590	1170	647	423	293	217	171	142	115
Full on(lx)	16900	4900	2240	1290	842	592	436	338	276	221

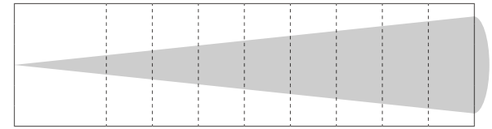

30°

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	200W LED
Color temperature:	2200K - 7500K
Zoom range:	15° - 30° or 25° - 50° manual zoom
Power connection:	Power in
Signal connection:	3-pin XLR in & out
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(11CH)

Control mode:	Rotary, DMX, RDM
Housing:	Color black, engineering plastic
Size:	507 x 188 x 158mm
N.W.:	3.8 kg
G.W.:	5 kg
Accessories(incl.):	Power cable, gel frame, Safety rope
Accessories(opt.):	Gobo holder, Clamp
Environment:	IP20

