



RDM
Control



98
TLCI

98
CRI

SOLARCYC

VW / CW

Solar CYC is a cyclorama fixture with even and wide wash of wall, cyclorama or curtains. Equipped with solar spectrum LEDs, 98 CRI, 93 R9 and 98 TLCI, it is perfectly designed for TV studio, video shooting. First time in the industry, we bring healthy LED illumination concept into theatre and studio lighting field.

LED cyclorama light




Key features:

- 175Watt white LEDs, 3200K/5600K optional
- Super bright, uniform coverage and even lighting
- CRI 98, R9≥93, TLCI 98
- Compatible with DMX and RDM protocols
- Dimmer curves selectable
- Flicker free operation
- LCD display
- Easy to setup
- PWM 1.2 - 20 KHz selectable

Application:


- Broadcast, HD studio
- Theatre
- Stage

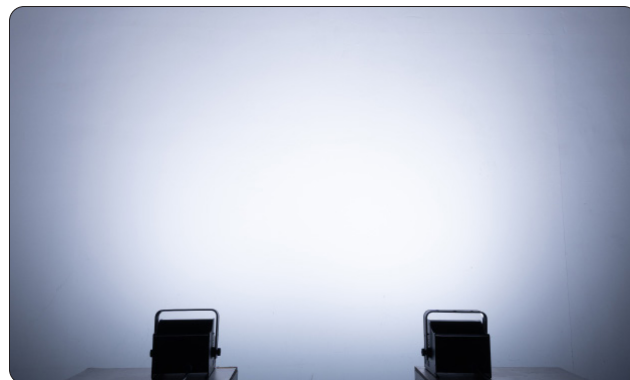


Color Rendition



Spectral distribution - 3200K

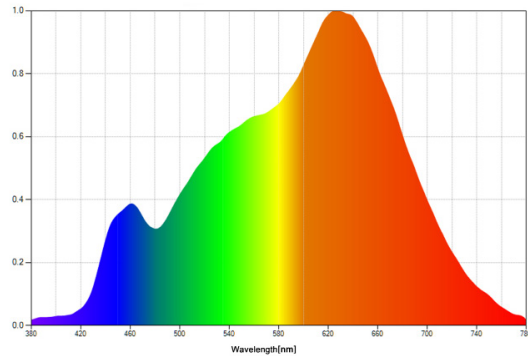

TM-30 3200K

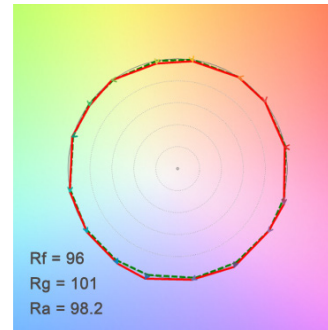

Technical Data

Power supply:	AC100 - 240V, 50/60Hz	Dimmer curves:	Standard/ Stage/ TV/ Architecture/ Theatre
Light source:	175W COB LED	Frequency:	1.2 KHz, 1.6 KHz, 2.4 KHz, 4 KHz, 6 KHz 20 KHz
Color temperature:	3200K or 5600K	Housing:	Colour black, Aluminum
Color Rendition:	CRI 98, R9≥93, TLCI 98	Size:	205.5 x 205 x 285.5mm
Power connection:	PowerCON in & out	N.W.:	3 kg
Signal connection:	3-pin XLR in & out(5-pin optional)	Accessories(incl.):	Power cable
Control channels:	1	Accessories(opt.):	Safety cable, Clamp
Control mode:	DMX, RDM	Environment:	IP20