



光谱图

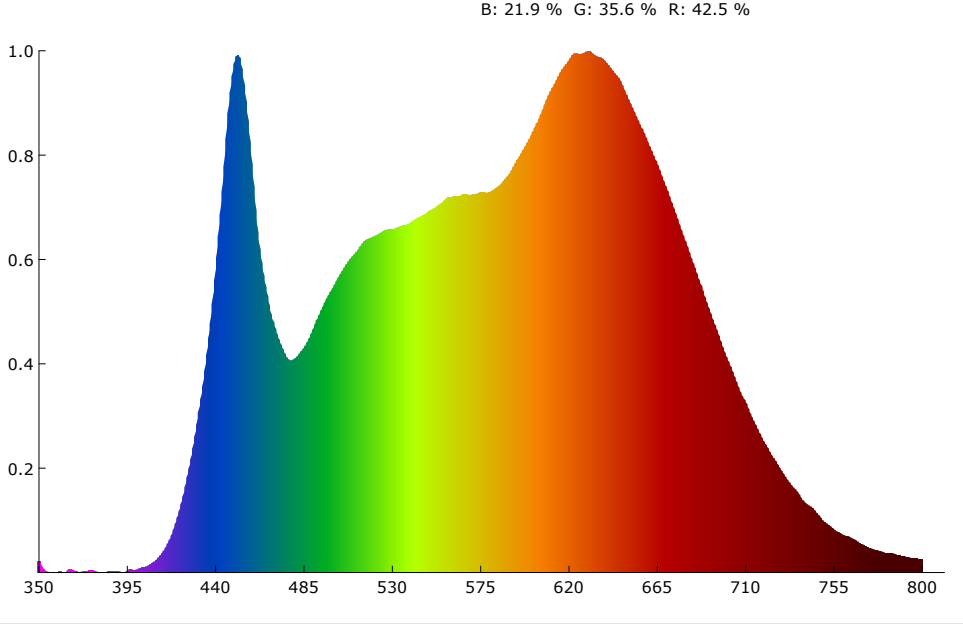

SDCM

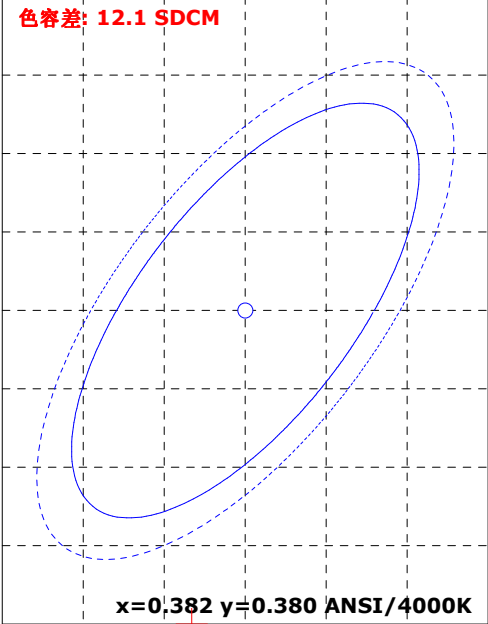

颜色参数:

坐标x: 0.3785 坐标y: 0.3535 坐标u: 0.2335 坐标v: 0.3271 坐标u': 0.2335 坐标v': 0.4906
红色比: 42.5 % 绿色比: 35.6 % 蓝色比: 21.9 % 光通量红色比: 21.8 % 光通量绿色比: 75.0 % 光通量蓝色比: 3.2 %

显色指数: 93.5 AvgR: 91.4
R1: 91.3 R2: 94.6 R3: 96.7 R4: 91.7 R5: 91.7 R6: 91.8 R7: 98.0 R8: 92.2
R9: 78.7 R10: 90.8 R11: 88.4 R12: 86.5 R13: 91.7 R14: 97.2 R15: 89.1


色温: 3864 K 光通量: 4751.257 lm 峰值波长: 630.5 nm 色容差: 12.1
明暗视觉比: 1.8 中心波长: 592.4 nm 主波长: 588.0 nm 质心波长: 581.8 nm
半宽度: 197.6 nm 色偏差: -0.01073 色纯度: 19.7 % 色质指数: 85.8
LER(TM-30): 254.4 辐射功率: 18674.6 mw 色域指数(Rg): 105.5 逼真度(Rf): 93.4
红光辐射功率: 7387.5 mw 近红辐射功率: 1206.8 mw 远红辐射功率: 61.9 mw

电参数:





光效: 19.8 Lm/W 能效: 21.5 能效等级: G
电压: 218.8 V 电流: 1.553 A 功率: 240.300 W 功率因素: 0.707

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:06/29/14
备注:


Rf: 93.4 CCT: 3864K u': 0.2335
Rg: 105.5 LER: 254.4 Duv: -0.01073 v': 0.4906

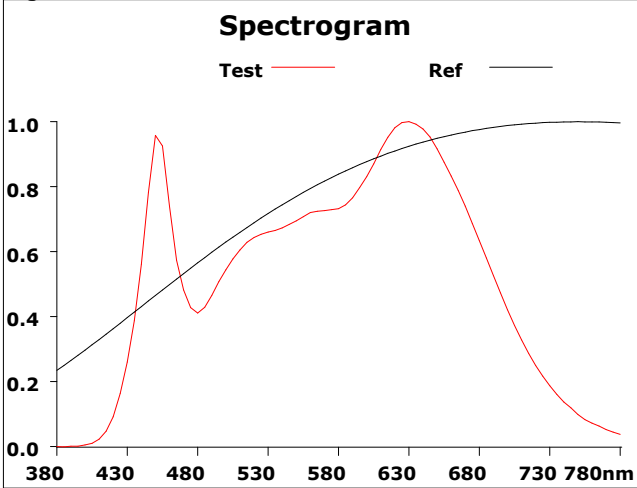

500			
Hue Bin	Rf	Chroma	Hue
1	94.6	1.9%	0.0%
2	95.1	1.8%	0.1%
3	94.0	1.9%	1.5%
4	95.6	0.6%	0.9%
5	93.3	0.8%	1.3%
6	93.3	4.0%	1.5%
7	94.4	2.8%	0.6%
8	92.8	2.7%	1.1%
9	94.1	2.1%	2.0%
10	95.8	0.9%	1.5%
11	90.1	3.1%	5.3%
12	90.3	3.9%	3.2%
13	95.6	2.6%	1.2%
14	90.2	8.1%	1.2%
15	91.7	4.1%	0.2%
16	89.7	4.4%	-3.2%

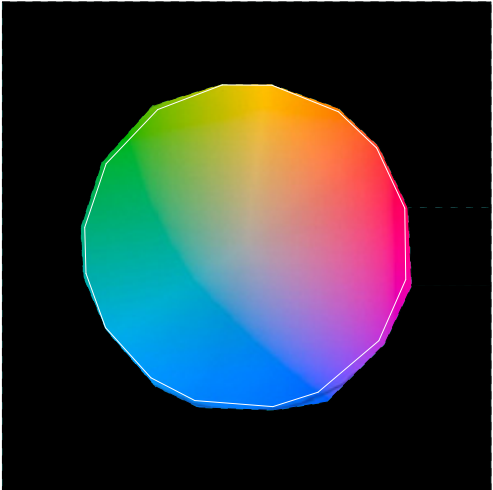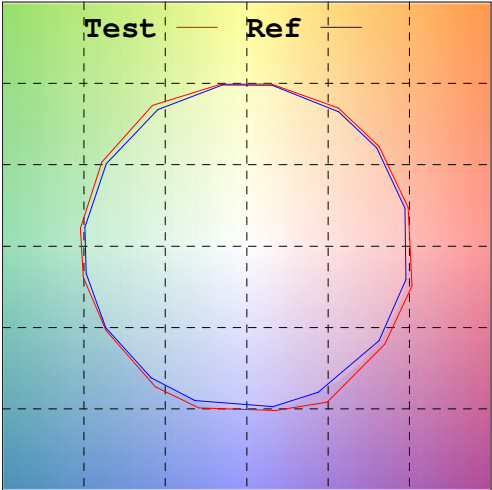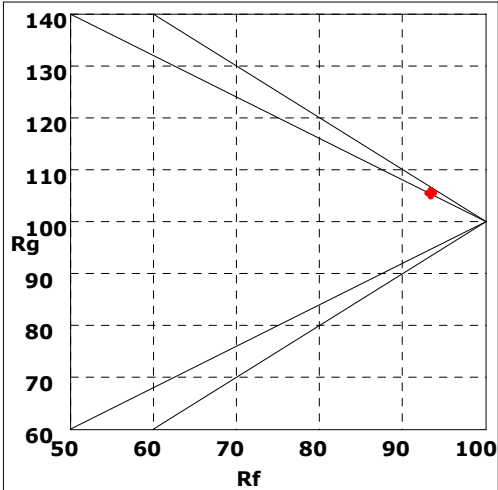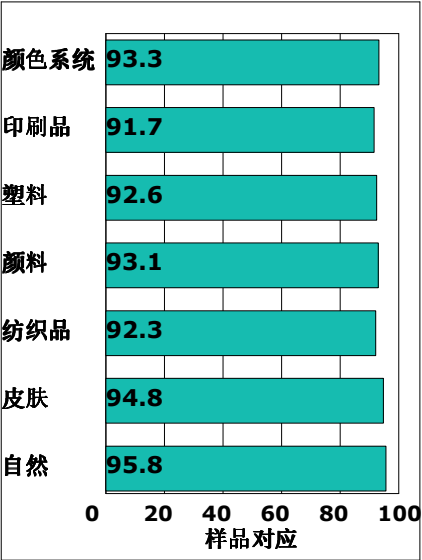

Rf by Bue

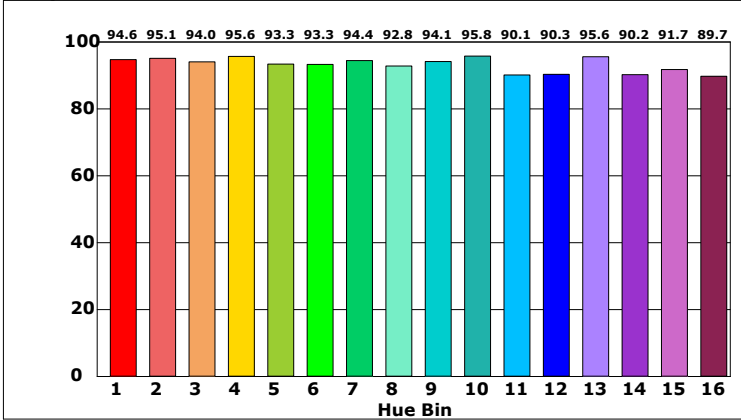

Chroma by Bue

