



光谱图

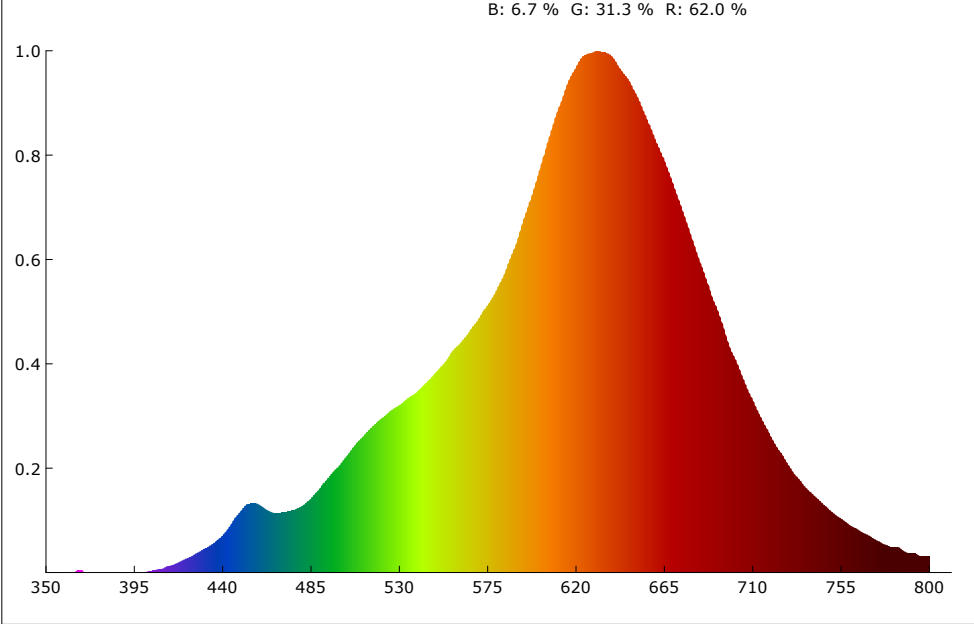

SDCM

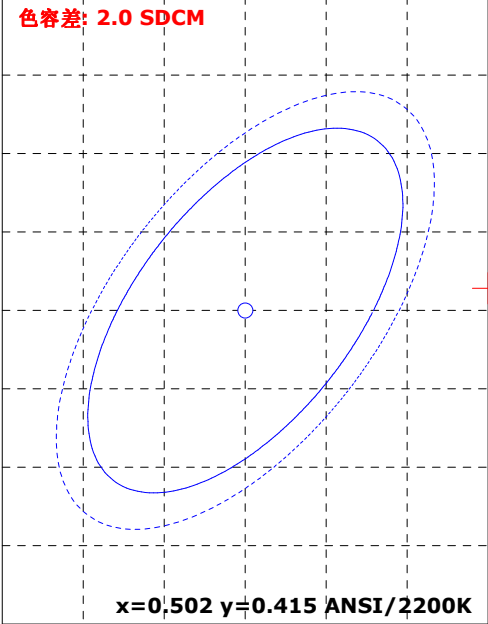

颜色参数:

坐标x: 0.5020 坐标y: 0.4115 坐标u: 0.2896 坐标v: 0.3561 坐标u': 0.2896 坐标v': 0.5342
红色比: 62.0 % 绿色比: 31.3 % 蓝色比: 6.7 % 光通量红色比: 31.6 % 光通量绿色比: 67.3 % 光通量蓝色比: 1.1 %

显色指数: 95.5 AvgR: 94.2
R1: 99.4 R2: 98.5 R3: 98.5 R4: 98.4 R5: 98.1 R6: 92.3 R7: 92.2 R8: 87.3
R9: 75.8 R10: 97.5 R11: 93.3 R12: 89.2 R13: 99.2 R14: 98.8 R15: 94.3


色温: 2210 K 光通量: 3546.210 lm 峰值波长: 631.5 nm 色容差: 2.0
明暗视觉比: 1.1 中心波长: 632.5 nm 主波长: 587.6 nm 质心波长: 619.1 nm
半宽度: 118.9 nm 色偏差: -0.00117 色纯度: 74.2 % 色质指数: 81.0
LER(TM-30): 242.4 辐射功率: 14628.9 mw 色域指数(Rg): 101.2 逼真度(Rf): 94.5
红光辐射功率: 8124.1 mw 近红辐射功率: 1433.4 mw 远红辐射功率: 83.9 mw

电参数:







光效: 15.6 Lm/W 能效: 17.0 能效等级: G
电压: 219.1 V 电流: 1.468 A 功率: 227.000 W 功率因素: 0.706

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:06/29/14
备注:

Rf: 94.5 CCT: 2210K u': 0.2896
Rg: 101.2 LER: 242.4 Duv: -0.00117 v': 0.5342

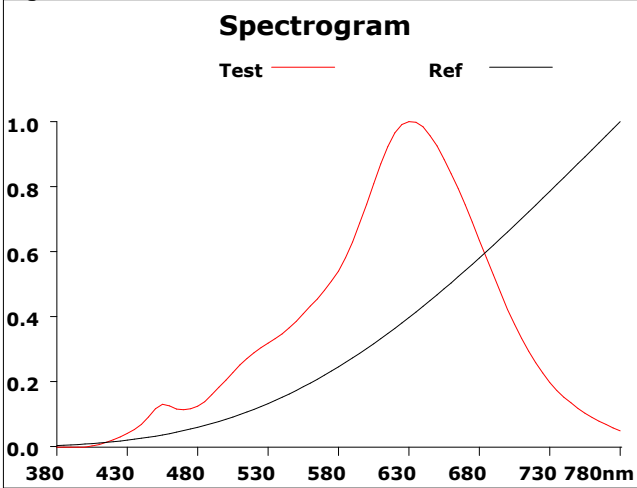

500			
Hue Bin	Rf	Chroma	Hue
1	93.8	-2.8%	0.5%
2	95.6	-1.2%	1.5%
3	94.4	0.4%	2.0%
4	97.6	0.5%	-0.1%
5	96.7	1.3%	1.3%
6	94.0	3.1%	2.0%
7	96.7	0.7%	-1.1%
8	95.5	3.2%	-0.5%
9	97.3	1.0%	-0.4%
10	97.1	0.8%	-0.5%
11	95.5	2.5%	-1.3%
12	93.0	2.1%	-3.5%
13	89.0	2.0%	-10.6%
14	79.5	-1.0%	-12.9%
15	94.3	-1.4%	-3.2%
16	90.7	-3.4%	-5.0%

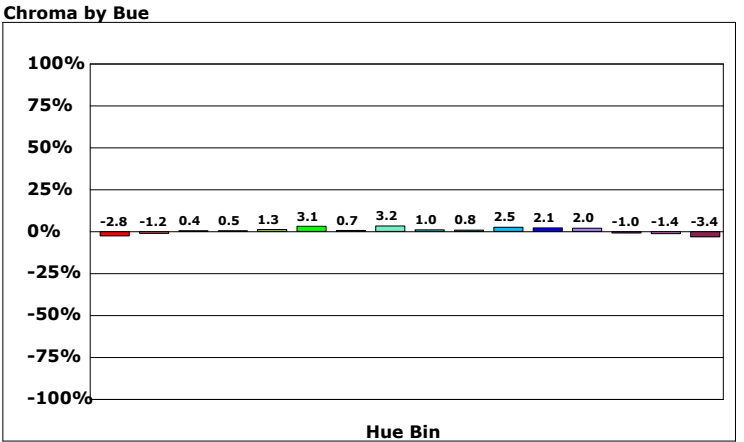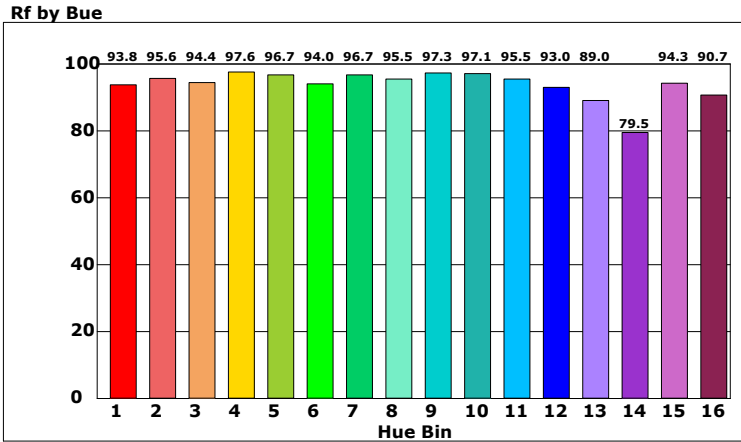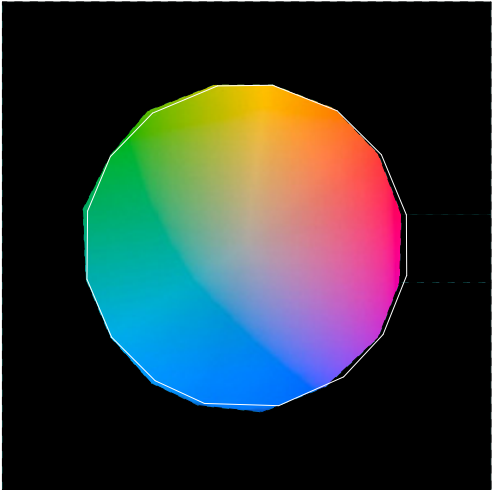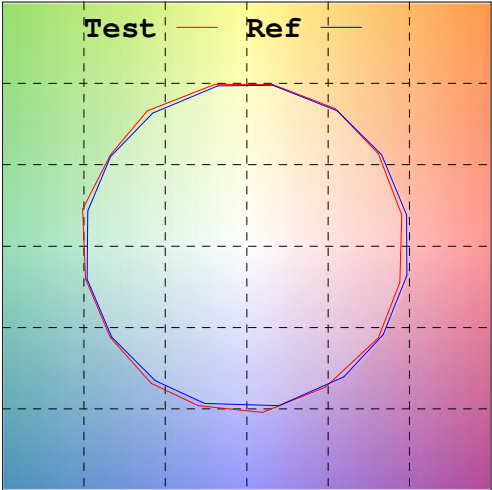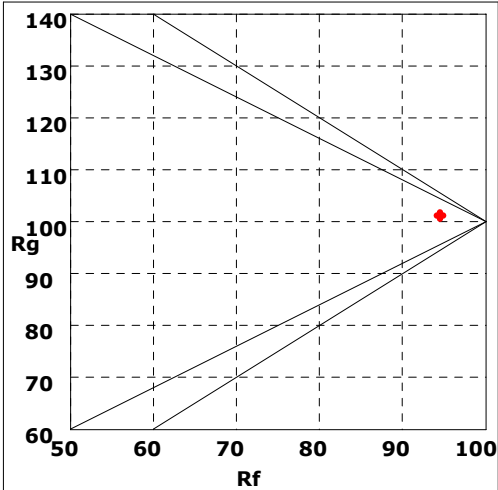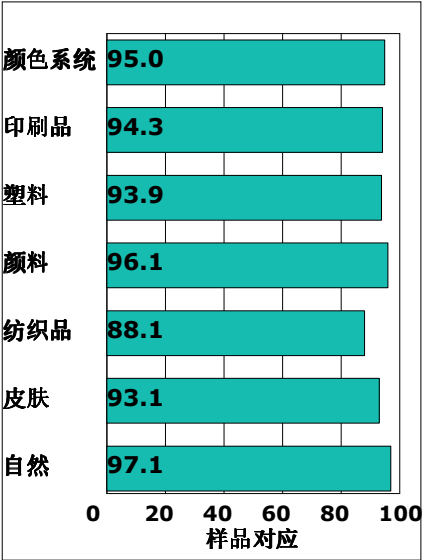

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:06/29/14
备注:

