



光谱图

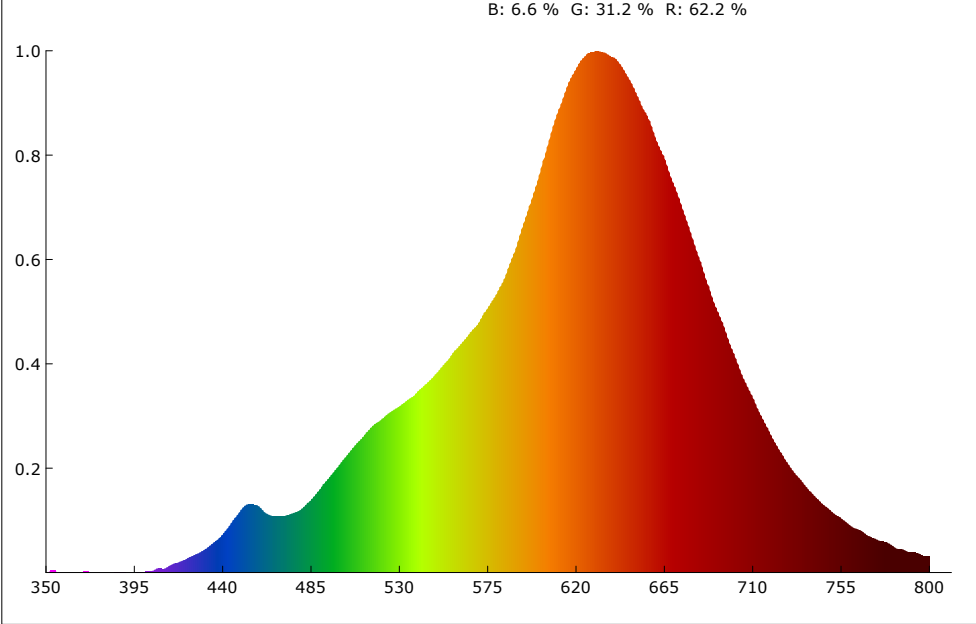

SDCM

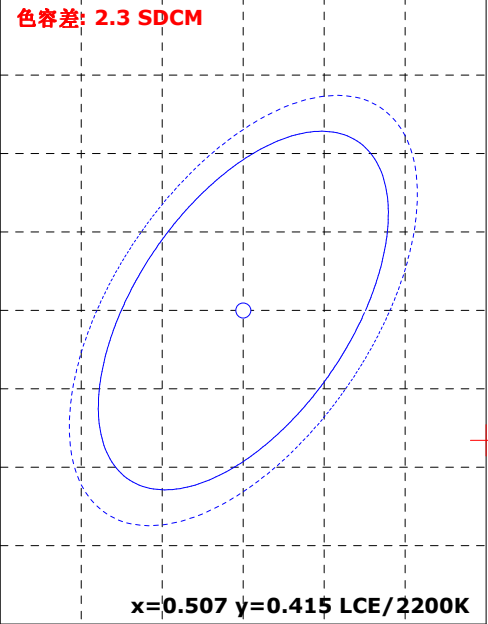

颜色参数:

坐标x: 0.5028 坐标y: 0.4117 坐标u: 0.2900 坐标v: 0.3562 坐标u': 0.2900 坐标v': 0.5343
红色比: 62.2 % 绿色比: 31.2 % 蓝色比: 6.6 % 光通量红色比: 31.7 % 光通量绿色比: 67.2 % 光通量蓝色比: 1.1 %

显色指数: 95.6 AvgR: 94.3
R1: 99.3 R2: 98.2 R3: 98.6 R4: 97.8 R5: 97.8 R6: 92.4 R7: 92.9 R8: 88.5
R9: 77.5 R10: 97.0 R11: 92.6 R12: 89.2 R13: 98.5 R14: 98.8 R15: 95.1


色温: 2204 K 光通量: 4650.141 lm 峰值波长: 630.5 nm 色容差: 2.3
明暗视觉比: 1.1 中心波长: 632.9 nm 主波长: 587.6 nm 质心波长: 619.6 nm
半宽度: 117.7 nm 色偏差: -0.00113 色纯度: 74.5 % 色质指数: 81.2
LER(TM-30): 241.2 辐射功率: 19281.5 mw 色域指数(Rg): 101.4 逼真度(Rf): 94.5
红光辐射功率: 10739.6 mw 近红辐射功率: 1910.3 mw 远红辐射功率: 114.2 mw

电参数:





光效: 20.4 Lm/W 能效: 22.2 能效等级: G
电压: 219.0 V 电流: 1.480 A 功率: 228.400 W 功率因素: 0.704

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:06/29/14
备注:


Rf: 94.5 CCT: 2204K u': 0.2900
Rg: 101.4 LER: 241.2 Duv: -0.00113 v': 0.5343

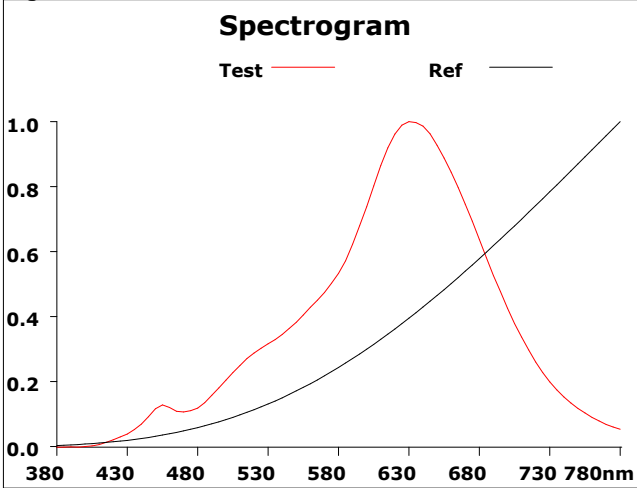

500			
Hue Bin	Rf	Chroma	Hue
1	94.4	-2.4%	0.2%
2	95.9	-1.1%	1.3%
3	94.5	0.5%	1.8%
4	97.4	0.7%	-0.1%
5	96.7	1.4%	1.4%
6	93.8	3.3%	2.1%
7	96.5	1.1%	-1.1%
8	95.0	3.6%	-0.6%
9	96.7	1.2%	-0.8%
10	96.7	0.8%	-1.0%
11	95.4	2.4%	-1.6%
12	92.9	1.9%	-3.7%
13	89.1	1.9%	-10.5%
14	80.0	-0.9%	-12.6%
15	94.5	-1.2%	-3.1%
16	90.1	-3.9%	-5.4%

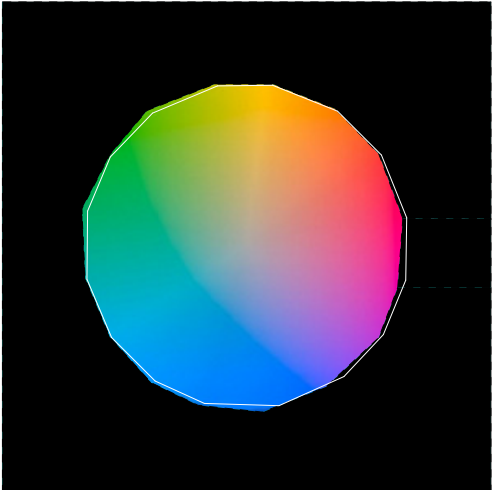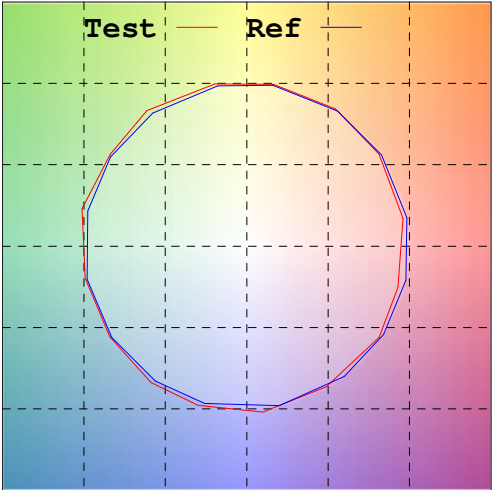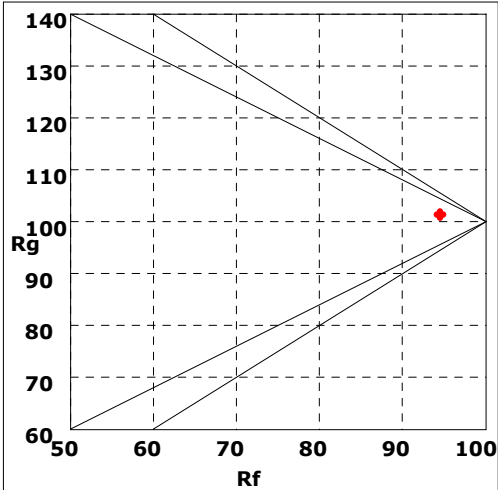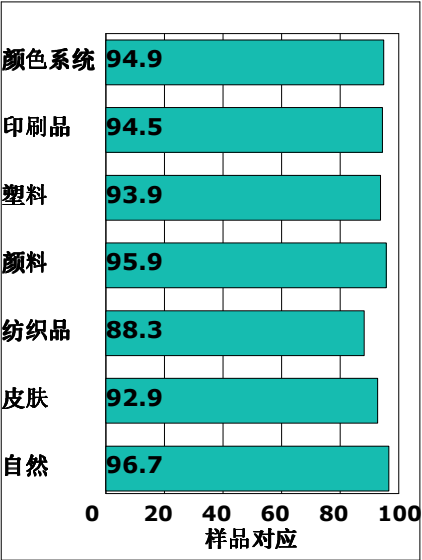

Rf by Bue

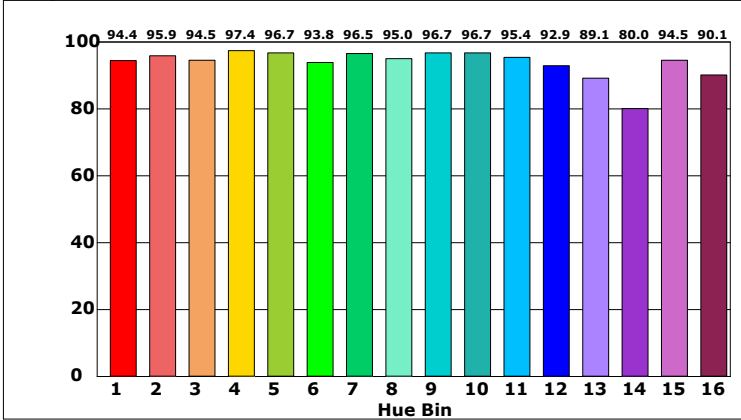

Chroma by Bue

