

RDM
Control

COB
100W LED

ZOOM



Flicker Free

EVENT 100C is a RGBL LED fresnel light with zoom. Uniform colour mixing, 25°-60° manual unilateral zoom angle, compact and portable size, easy to install and use. Barndoor and color frame is included in delivery. The fixture is super compact for small exhibitions.

- Key features:
- 250W RGBL LED (55W R + 65W G + 65W B + 65W L), Constant 100W output
 - 25° - 60° zoom lens, single side zoom
 - Flicker free with selectable PWM
 - Rotary, key, DMX control of dimmer
 - Intelligent fan, silent operation for studio and theatre use
 - Super compact body, only 2.5 kg, easy to install and setup
 - Powercon TR1 in, DMX in & out

- Application:
- Broadcast, HD studio
 - Theatre, church
 - Fashion show
 - Museum
 - Exhibition

Accessories:

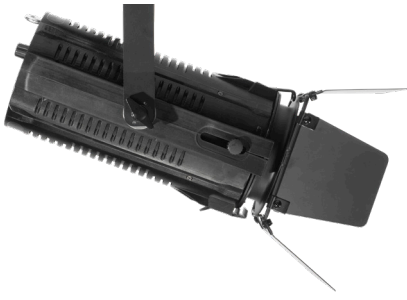


EVENT 100C

100W RGBL LED fresnel zoom




Photometric

R(lx)	4090	1070	504	300	167	125	88.4	72.8	59	48
G(lx)	10100	2950	1470	847	498	365	271	217	172	144
B(lx)	2040	566	283	163	95	70.2	50	40	31.5	26.8
L(lx)	11100	3090	1510	924	528	391	281	227	184	150
Full on(lx)	6050	1770	883	514	292	219	161	129	103	86.7

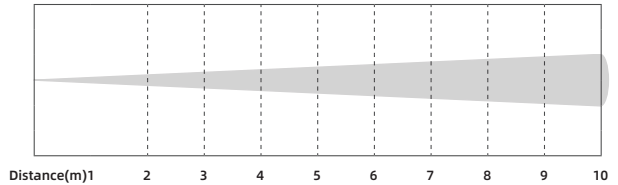

25°

R(lx)	744	206	99.6	55.3	36	26	20.8	16	12	10.2
G(lx)	1950	583	284	166	105	78.4	62	47.8	37.2	30.5
B(lx)	384	113	85.3	30.8	19.5	14.1	11.3	8.4	6.4	5.5
L(lx)	1990	599	289	166	106	77	62	47.6	36	30
Full on(lx)	1130	339	165	96.2	61.1	45	35.2	28	21.5	17.5

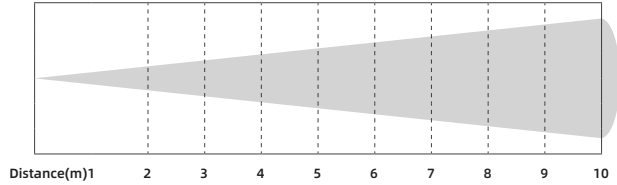

60°

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	250W LED (55W R + 65W G + 65W B + 65W L)
Color :	RGBL
Zoom range:	25° - 60° manual zoom
Power connection:	PowerCON TR1 in
Signal connection:	3-pin XLR in & out
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(11CH)

Control mode:	Rotary, DMX, RDM
Housing:	Color black, engineering plastic
Size:	403 x 180 x 124mm
N.W.:	2.5 kg
G.W.:	4 kg
Accessories(incl.):	Power cable, barndoor, gel frame, Safety rope
Environment:	IP20

