



光谱图

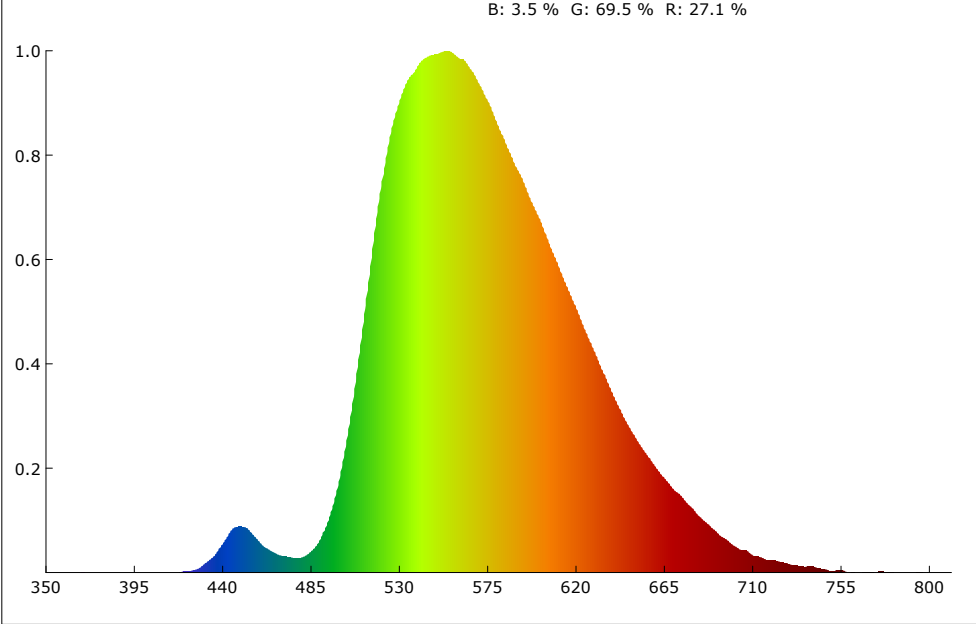

SDCM

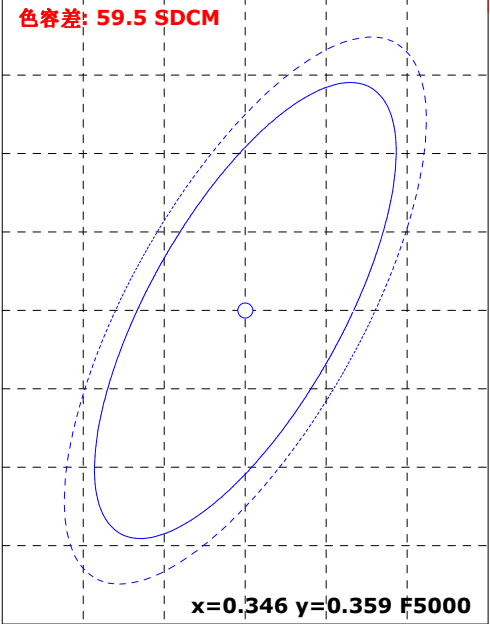

颜色参数:

坐标x: 0.4209 坐标y: 0.5319 坐标u: 0.1971 坐标v: 0.3737 坐标u': 0.1971 坐标v': 0.5605
红色比: 27.1 % 绿色比: 69.5 % 蓝色比: 3.5 % 光通量红色比: 11.5 % 光通量绿色比: 88.3 % 光通量蓝色比: 0.3 %

显色指数: 52.7 AvgR: 35.1
R1: 42.9 R2: 58.7 R3: 75.2 R4: 41.9 R5: 41.6 R6: 47.7 R7: 80.9 R8: 32.9
R9: -99.0 R10: 10.3 R11: 25.9 R12: 5.3 R13: 44.4 R14: 87.6 R15: 30.0


色温: 4024 K 光通量: 1249.156 lm 峰值波长: 556.5 nm 色容差: 59.5
明暗视觉比: 1.2 中心波长: 566.8 nm 主波长: 568.7 nm 质心波长: 573.6 nm
半宽度: 107.8 nm 色偏差: 0.04826 色纯度: 86.2 % 色质指数: 60.4
LER(TM-30): 462.4 辐射功率: 2701.7 mw 色域指数(Rg): 62.1 逼真度(Rf): 56.4
红光辐射功率: 724.1 mw 近红辐射功率: 27.4 mw 远红辐射功率: 0.2 mw

电参数:

光效: 22.8 Lm/W 能效: 24.9 能效等级: G
电压: 220.6 V 电流: 0.406 A 功率: 54.730 W 功率因素: 0.610

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:06/17/13
备注:

Rf: 56.4 CCT: 4024K u': 0.1971
Rg: 62.1 LER: 462.4 Duv: 0.04826 v': 0.5605

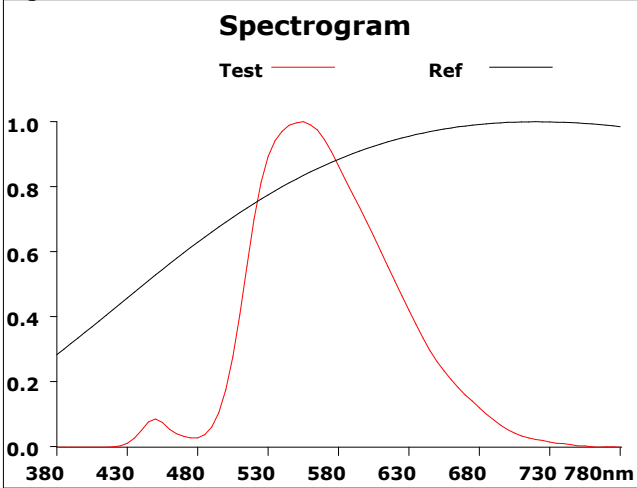

500			
Hue Bin	Rf	Chroma	Hue
1	50.3	-25.3%	-3.3%
2	55.8	-21.3%	-3.4%
3	45.5	-26.1%	-2.1%
4	53.4	-26.9%	-0.2%
5	53.3	-31.1%	4.8%
6	50.4	-30.3%	7.2%
7	49.2	-28.4%	11.9%
8	52.8	-24.2%	9.8%
9	60.0	-22.0%	15.4%
10	45.8	-21.3%	22.4%
11	65.5	-11.2%	16.8%
12	71.6	-8.7%	8.4%
13	75.7	-10.3%	-4.6%
14	75.2	-7.6%	-8.4%
15	62.2	-16.2%	-13.6%
16	57.3	-18.4%	-10.6%

