



光谱图

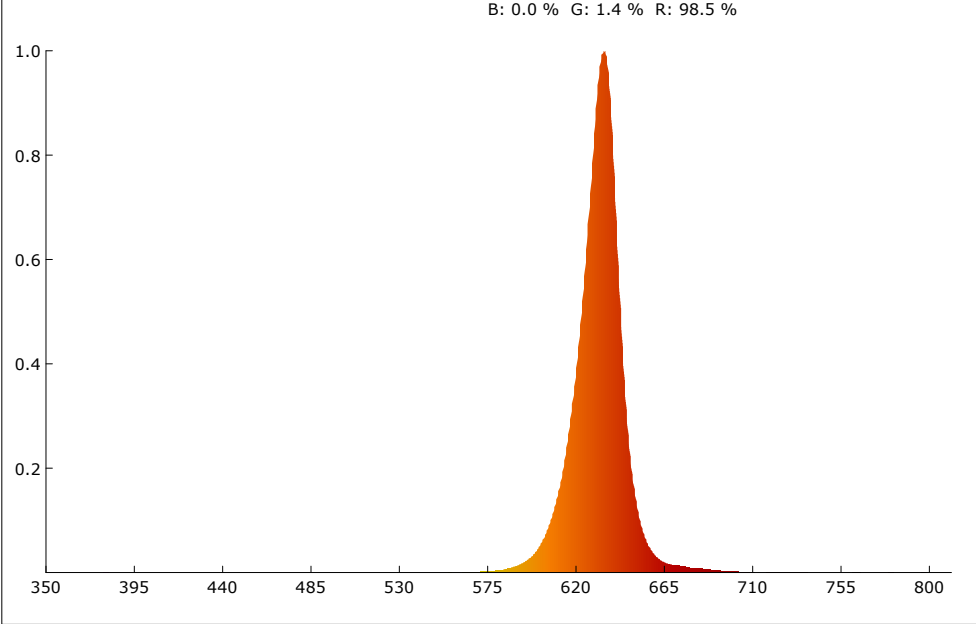

SDCM

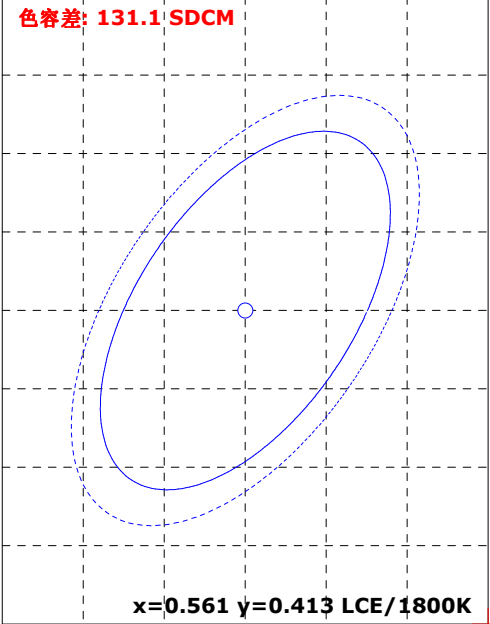

颜色参数:

坐标x: 0.6977 坐标y: 0.3018 坐标u: 0.5340 坐标v: 0.3465 坐标u': 0.5340 坐标v': 0.5197
红色比: 98.5 % 绿色比: 1.4 % 蓝色比: 0.0 % 光通量红色比: 95.4 % 光通量绿色比: 4.6 % 光通量蓝色比: 0.0 %

显色指数: 18.5 AvgR: 16.8
R1: 7.2 R2: 75.8 R3: 37.7 R4: -19.2 R5: 7.8 R6: 90.1 R7: 9.7 R8: -60.9
R9: -99.0 R10: 69.1 R11: -8.6 R12: 79.7 R13: 28.4 R14: 63.5 R15: -29.4


色温: 1000 K 光通量: 463.805 lm 峰值波长: 634.5 nm 色容差: 131.1
明暗视觉比: 0.0 中心波长: 633.1 nm 主波长: 623.5 nm 质心波长: 632.3 nm
半宽度: 19.5 nm 色偏差: 0.00000 色纯度: 99.9 % 色质指数: -nan(ind)
LER(TM-30): 177.3 辐射功率: 2616.5 mw 色域指数(Rg): 18.7 逼真度(Rf): 12.9
红光辐射功率: 2570.2 mw 近红辐射功率: 6.0 mw 远红辐射功率: 1.1 mw

电参数:




光效: 11.8 lm/W 能效: 12.9 能效等级: G
电压: 220.7 V 电流: 0.302 A 功率: 39.180 W 功率因素: 0.587

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:06/17/13
备注:


Rf: 12.9 CCT: 1000K u': 0.5340
Rg: 18.7 LER: 177.3 Duv: 0.0000 v': 0.5197

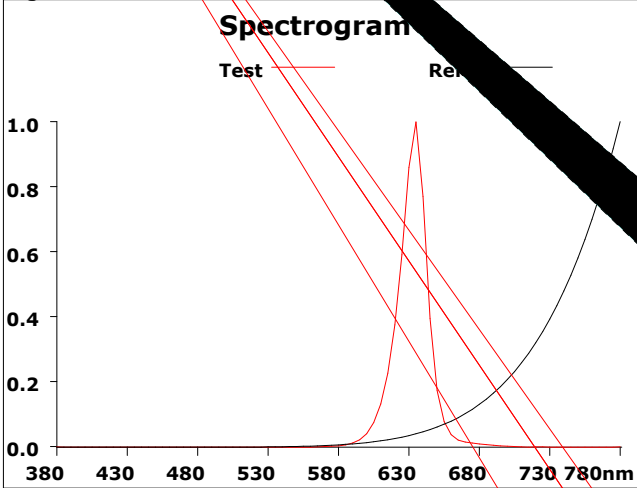


500			
Hue Bin	Rf	Chroma	Hue
1	6.7	-70.0%	9.6%
2	52.0	-75.4%	15.0%
3	75.6	-65.0%	28.6%
4	100.0	nan%	-nan(ind)%
5	84.4	-55.6%	14.7%
6	100.0	nan%	-nan(ind)%
7	64.0	-28.6%	16.0%
8	5.8	-57.3%	-8.5%
9	1.3	-66.0%	1.7%
10	6.3	-83.6%	16.4%
11	53.8	-70.2%	23.9%
12	40.4	-69.5%	-88.3%
13	14.5	-88.0%	-39.8%
14	34.3	8.0%	2.1%
15	65.6	1.0%	6.3%
16	6.1	-1.0%	7.5%

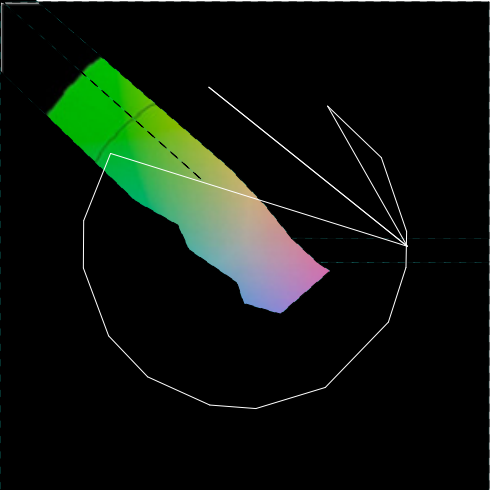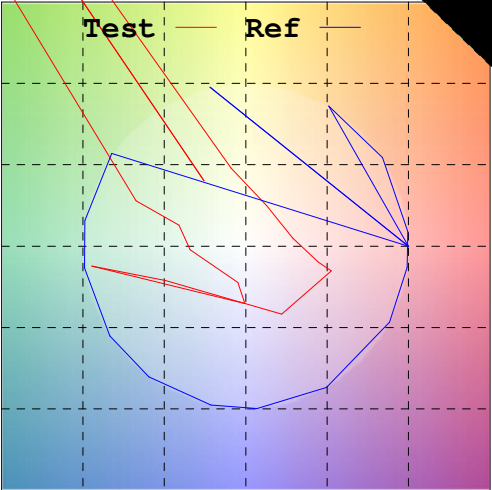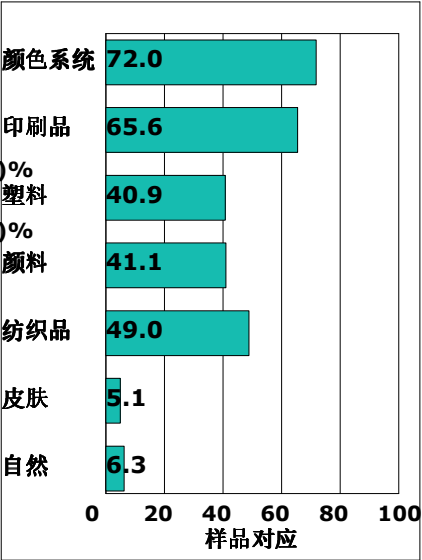

Rf by Bue

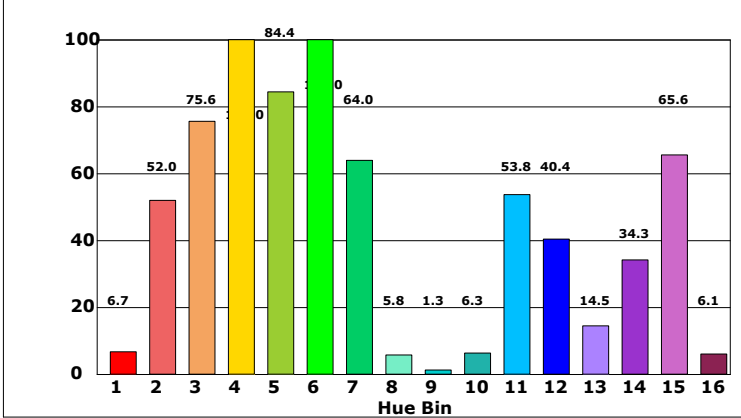

Chroma by Bue

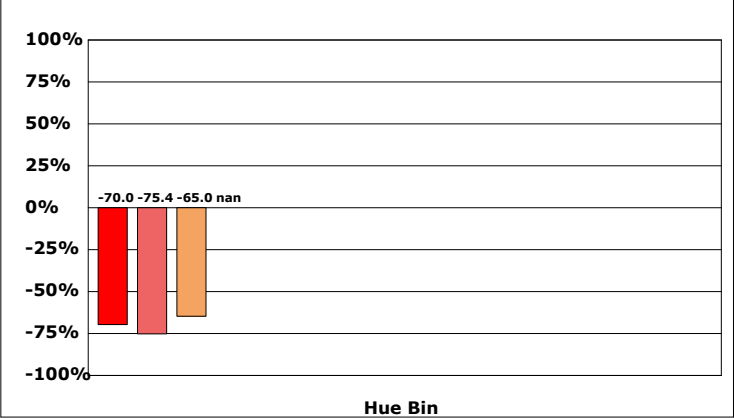

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173