



光谱图

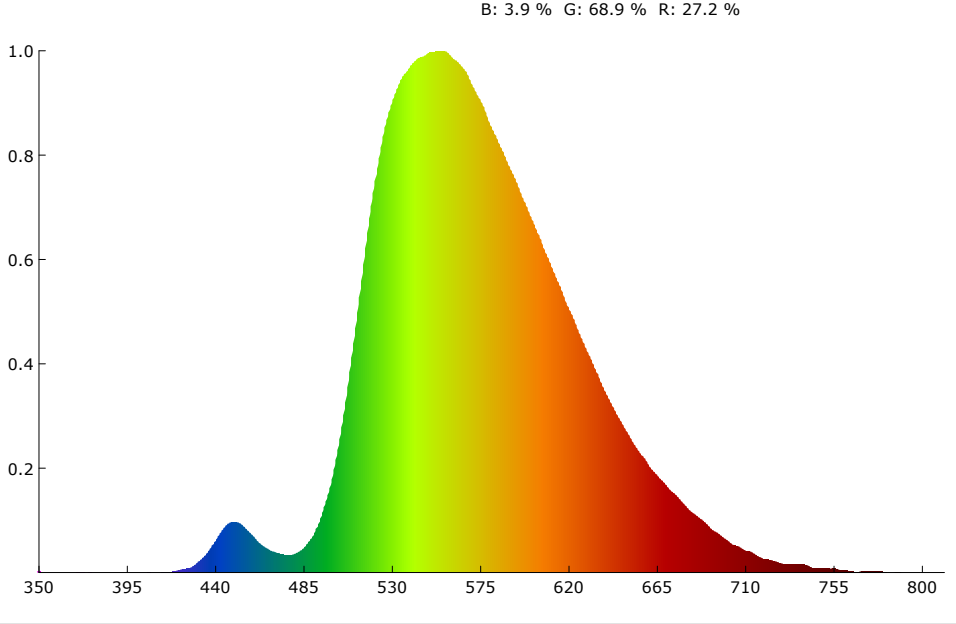

SDCM

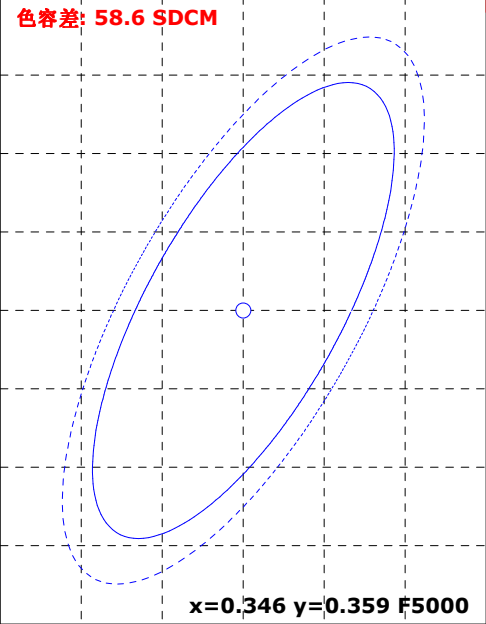

颜色参数:

坐标x: 0.4192      坐标y: 0.5292      坐标u: 0.1970      坐标v: 0.3730      坐标u': 0.1970      坐标v': 0.5595  
红色比: 27.2 %      绿色比: 68.9 %      蓝色比: 3.9 %      光通量红色比: 11.5 %      光通量绿色比: 88.2 %      光通量蓝色比: 0.3 %

显色指数: 53.7      AvgR: 36.1  
R1: 43.2      R2: 59.4      R3: 77.5      R4: 44.3      R5: 42.5      R6: 48.2      R7: 81.5      R8: 33.6  
R9: -99.0      R10: 11.4      R11: 29.0      R12: 5.6      R13: 44.8      R14: 88.8      R15: 30.7


色温: 4046 K      光通量: 1423.729 lm      峰值波长: 556.5 nm      色容差: 58.6  
明暗视觉比: 1.2      中心波长: 566.6 nm      主波长: 568.6 nm      质心波长: 573.7 nm  
半宽度: 107.2 nm      色偏差: 0.04774      色纯度: 84.9 %      色质指数: 63.1  
LER(TM-30): 457.6      辐射功率: 3111.2 mw      色域指数(Rg): 64.0      逼真度(Rf): 58.1  
红光辐射功率: 834.6 mw      近红辐射功率: 39.2 mw      远红辐射功率: 0.4 mw

电参数:

光效: 27.8 Lm/W      能效: 30.2      能效等级: G  
电压: 220.9 V      电流: 0.383 A      功率: 51.260 W      功率因素: 0.604

产品型号:      制造厂商:Guangzhou Hotion Technology Co., Ltd  
产品编号:      测试单位:  
测试人员:      测试日期:06/17/13  
备注:

Rf: 58.1 CCT: 4046K u': 0.1970  
Rg: 64.0 LER: 457.6 Duv: 0.04774 v': 0.5595

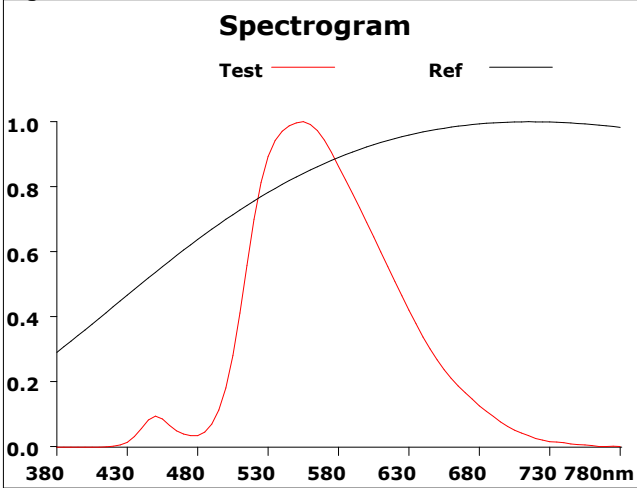

| 500     |      |        |        |
|---------|------|--------|--------|
| Hue Bin | Rf   | Chroma | Hue    |
| 1       | 50.9 | -25.1% | -3.4%  |
| 2       | 56.8 | -20.8% | -2.4%  |
| 3       | 48.3 | -24.7% | -0.6%  |
| 4       | 57.1 | -24.6% | 0.9%   |
| 5       | 57.2 | -28.3% | 4.8%   |
| 6       | 54.4 | -27.8% | 5.9%   |
| 7       | 52.6 | -27.0% | 9.8%   |
| 8       | 54.7 | -23.7% | 8.3%   |
| 9       | 60.5 | -22.0% | 14.8%  |
| 10      | 45.6 | -20.9% | 23.0%  |
| 11      | 65.3 | -10.3% | 17.8%  |
| 12      | 73.0 | -7.3%  | 8.9%   |
| 13      | 77.4 | -8.3%  | -4.8%  |
| 14      | 75.6 | -6.1%  | -9.5%  |
| 15      | 62.5 | -15.0% | -15.1% |
| 16      | 57.5 | -17.9% | -11.7% |

