



光谱图

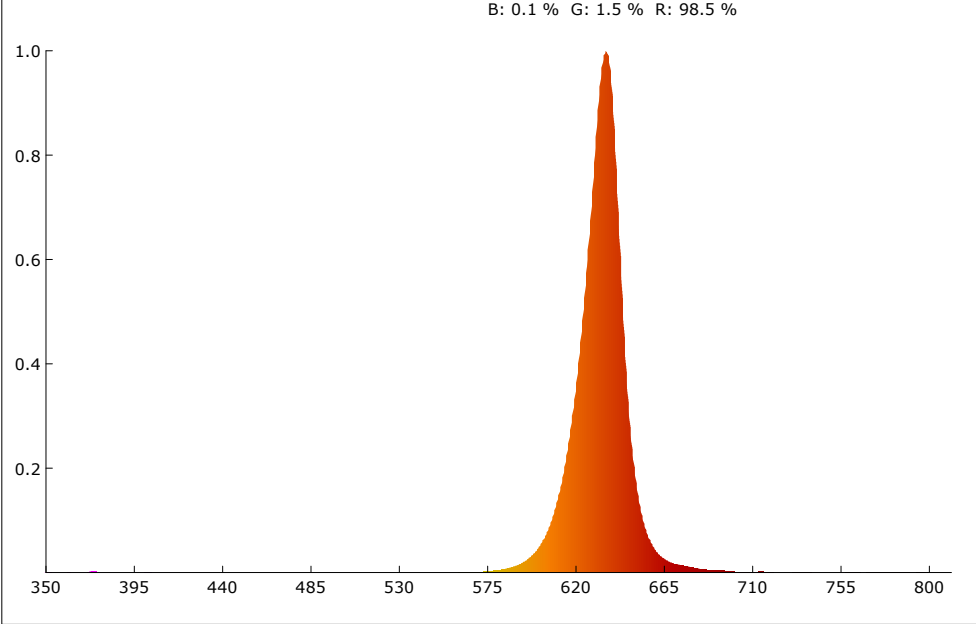

SDCM

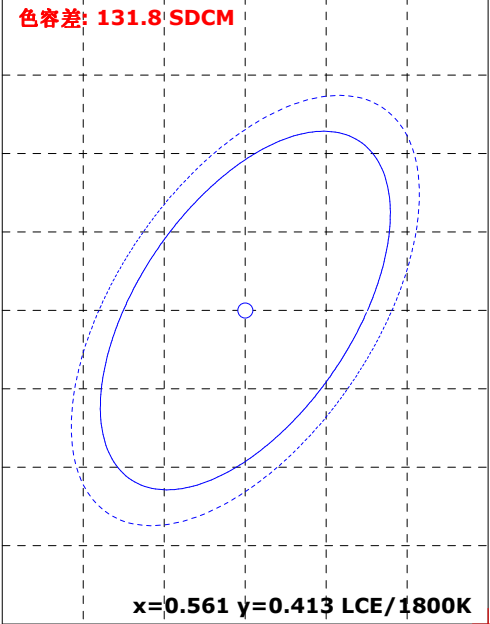

颜色参数:

坐标x: 0.6984 坐标y: 0.3011 坐标u: 0.5355 坐标v: 0.3463 坐标u': 0.5355 坐标v': 0.5195
红色比: 98.5 % 绿色比: 1.5 % 蓝色比: 0.1 % 光通量红色比: 95.2 % 光通量绿色比: 4.8 % 光通量蓝色比: 0.0 %

显色指数: 19.9 AvgR: 17.8
R1: 7.3 R2: 75.2 R3: 39.9 R4: -16.6 R5: 9.9 R6: 90.2 R7: 11.3 R8: -57.7
R9: -99.0 R10: 68.3 R11: -6.3 R12: 79.9 R13: 28.0 R14: 64.7 R15: -27.9


色温: 1000 K 光通量: 501.012 lm 峰值波长: 635.5 nm 色容差: 131.8
明暗视觉比: 0.0 中心波长: 634.3 nm 主波长: 623.9 nm 质心波长: 633.2 nm
半宽度: 20.0 nm 色偏差: -0.02508 色纯度: 99.9 % 色质指数: -nan(ind)
LER(TM-30): 171.1 辐射功率: 2928.2 mw 色域指数(Rg): 20.3 逼真度(Rf): 15.3
红光辐射功率: 2868.8 mw 近红辐射功率: 10.2 mw 远红辐射功率: 2.3 mw

电参数:




光效: 12.6 Lm/W 能效: 13.7 能效等级: G
电压: 220.9 V 电流: 0.306 A 功率: 39.690 W 功率因素: 0.585

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:06/17/13
备注:


Rf: 15.3 CCT: 1000K u': 0.5355
Rg: 20.3 LER: 171.1 Duv: 0.02508 v': 0.5195

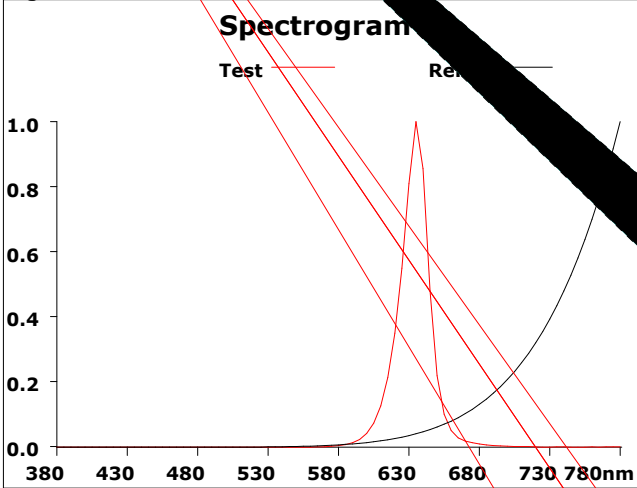


500			
Hue Bin	Rf	Chroma	Hue
1	8.4	-67.6%	9.5%
2	53.7	-72.6%	15.0%
3	76.2	-62.0%	29.7%
4	100.0	nan%	-nan(ind)%
5	85.2	-52.3%	15.6%
6	100.0	nan%	-nan(ind)%
7	64.5	-24.2%	16.7%
8	7.9	-54.6%	-8.3%
9	1.9	-63.2%	1.7%
10	7.6	-81.3%	16.6%
11	54.1	-70.7%	20.3%
12	38.6	-68.3%	-94.0%
13	12.9	-88.9%	-44.3%
14	32.1	-16.6%	3.1%
15	66.6	8.0%	
16	8.6	-6.9%	

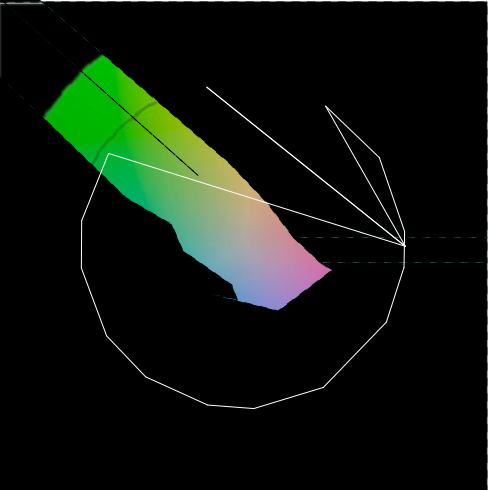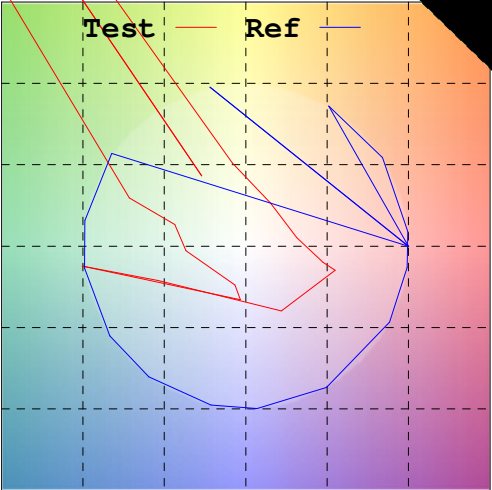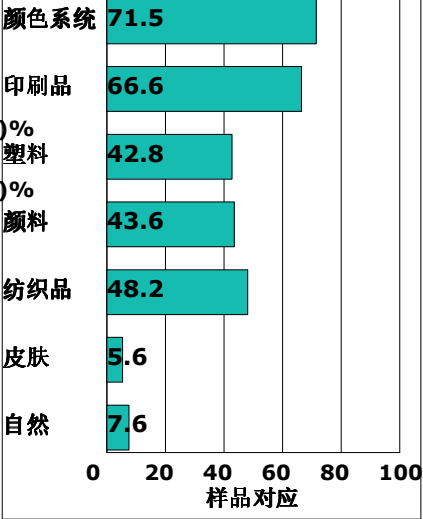

Rf by Bue

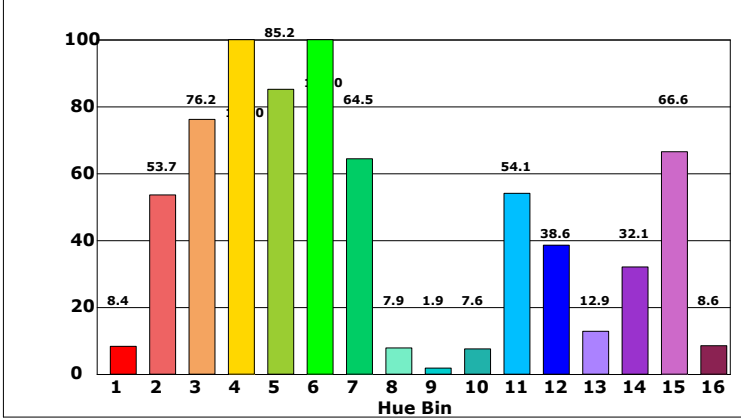

Chroma by Bue

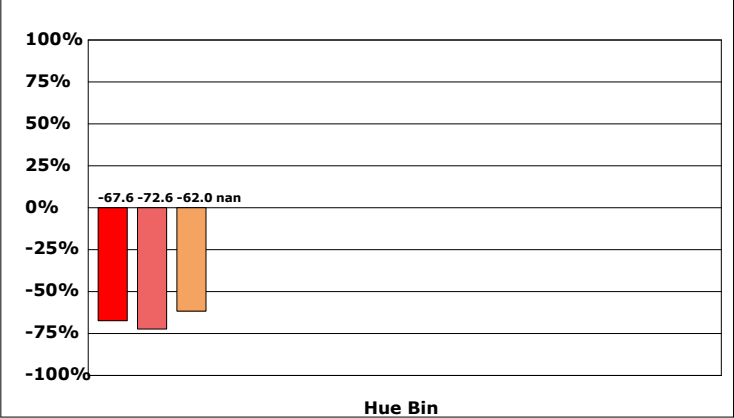

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173