



光谱图

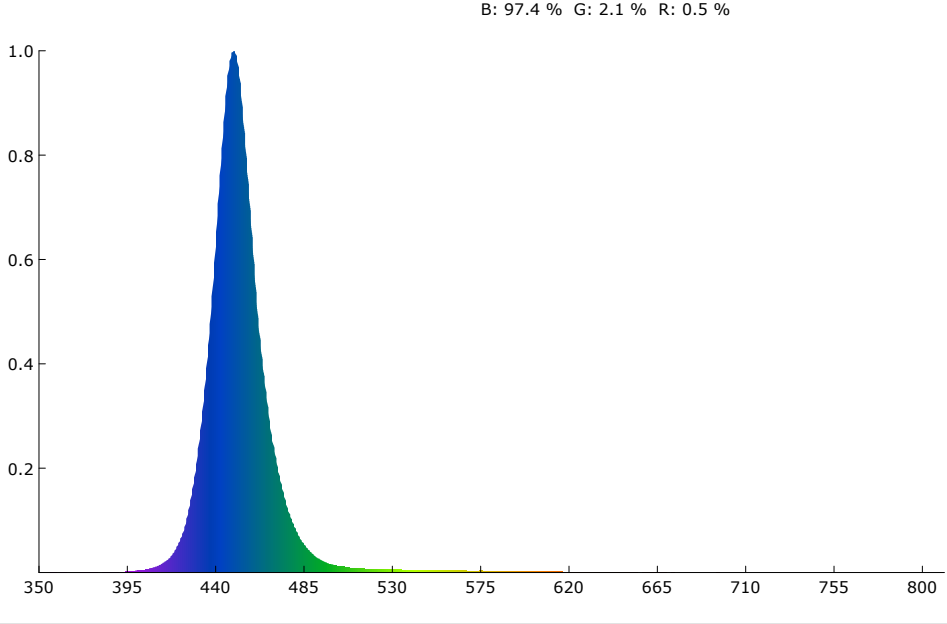

SDCM

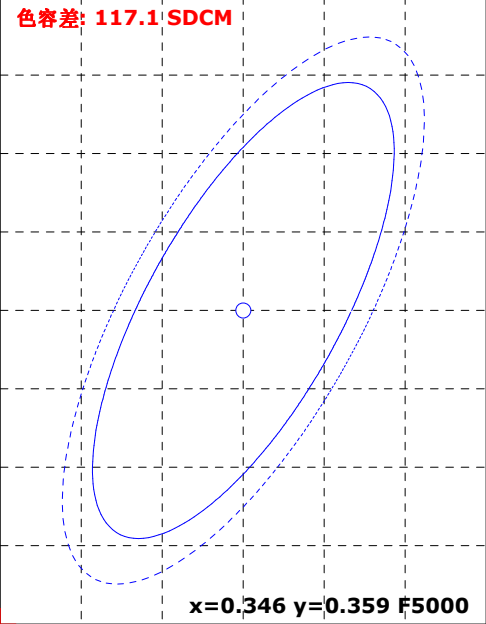

颜色参数:

坐标x: 0.1554 坐标y: 0.0331 坐标u: 0.2014 坐标v: 0.0643 坐标u': 0.2014 坐标v': 0.0965
红色比: 0.5 % 绿色比: 2.1 % 蓝色比: 97.4 % 光通量红色比: 2.2 % 光通量绿色比: 27.7 % 光通量蓝色比: 70.1 %

显色指数: -46.6 AvgR: -46.4
R1: 20.7 R2: -27.9 R3: -99.0 R4: -99.0 R5: 26.6 R6: -33.9 R7: -55.7 R8: -45.8
R9: -99.0 R10: -99.0 R11: -99.0 R12: -93.0 R13: 8.9 R14: -33.6 R15: 33.2


色温: 99999 K 光通量: 330.206 lm 峰值波长: 449.6 nm 色容差: 117.1
明暗视觉比: 18.2 中心波长: 450.0 nm 主波长: 455.9 nm 质心波长: 454.0 nm
半宽度: 23.2 nm 色偏差: 0.16168 色纯度: 97.0 % 色质指数: 0.3
LER(TM-30): 43.4 辐射功率: 7606.7 mw 色域指数(Rg): nan 逼真度(Rf): -nan(ind)
红光辐射功率: 35.8 mw 近红辐射功率: 1.2 mw 远红辐射功率: 0.4 mw

电参数:


光效: 5.9 Lm/W 能效: 6.4 能效等级: G
电压: 220.8 V 电流: 0.414 A 功率: 55.890 W 功率因素: 0.610

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:06/17/13
备注:

Rf: -nan(ind) CCT: 99999K u': 0.2014
Rg: nan LER: 43.4 Duv: 0.16168 v': 0.0965

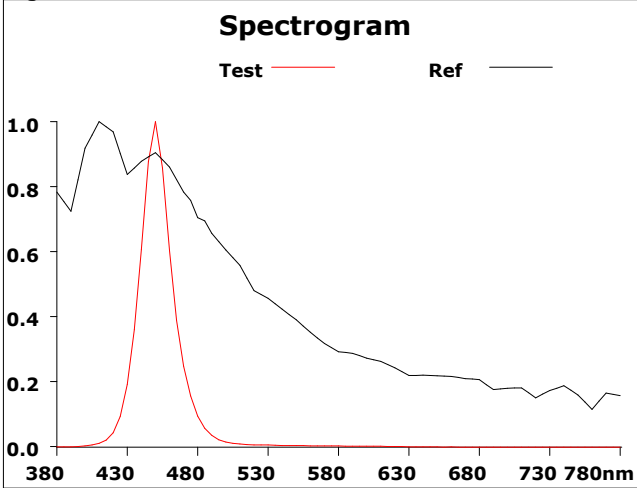

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-143.5%	50.6%
2	35.3	13.2%	-7.7%
3	-nan(ind)	nan%	-nan(ind)%
4	-nan(ind)	nan%	-nan(ind)%
5	-nan(ind)	nan%	-nan(ind)%
6	-nan(ind)	nan%	-nan(ind)%
7	-nan(ind)	nan%	-nan(ind)%
8	-nan(ind)	nan%	-nan(ind)%
9	-nan(ind)	nan%	-nan(ind)%
10	0.0	31.8%	-25.2%
11	0.0	46.1%	-212.7%
12	0.0	-32.8%	-324.7%
13	0.0	-172.7%	-315.0%
14	0.0	-280.1%	-252.3%
15	0.0	-379.1%	-173.3%
16	0.0	-319.7%	-9.6%

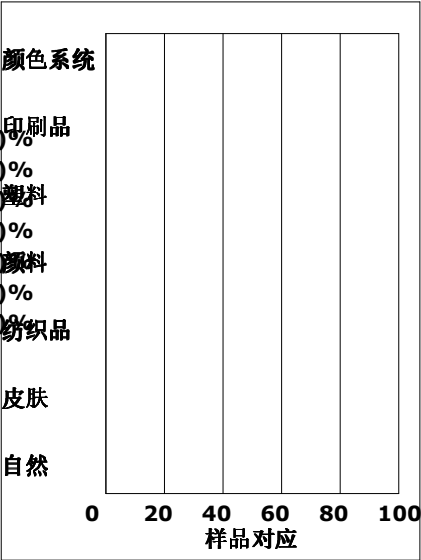

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012