



光谱图

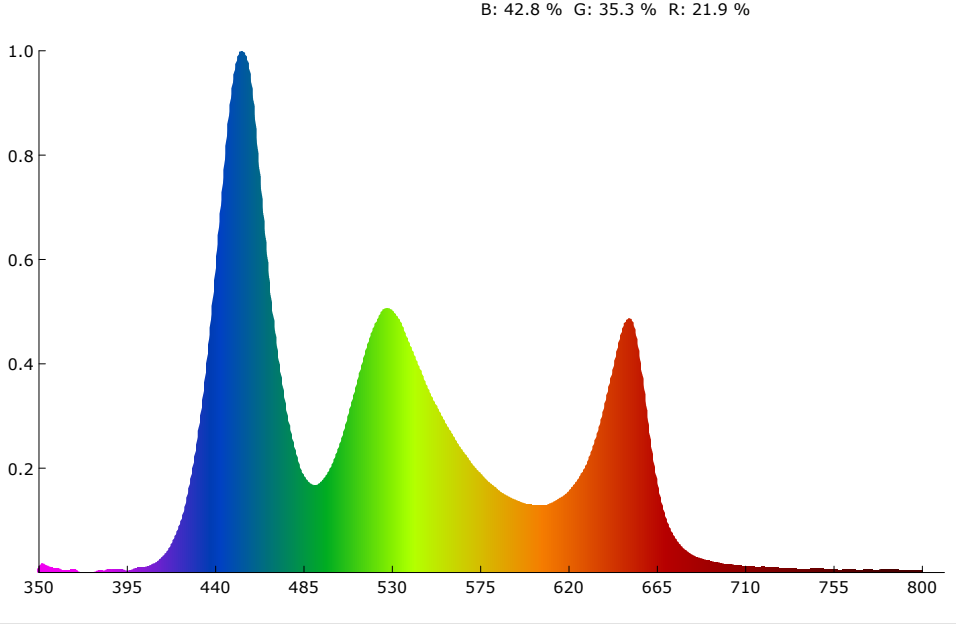

SDCM

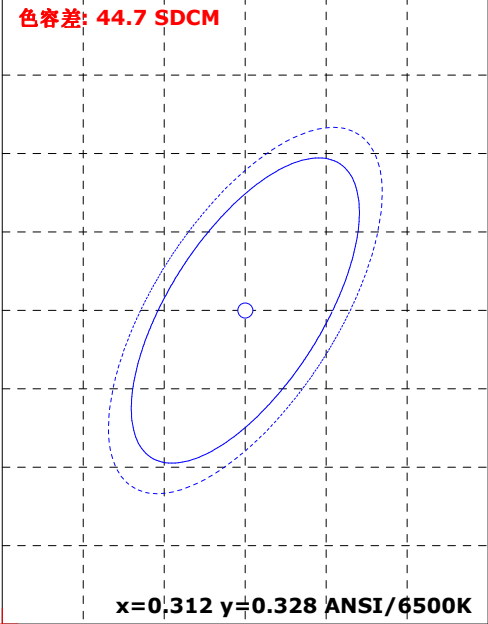

颜色参数:

坐标x: 0.2495 坐标y: 0.2677 坐标u: 0.1747 坐标v: 0.2811 坐标u': 0.1747 坐标v': 0.4216
红色比: 21.9 % 绿色比: 35.3 % 蓝色比: 42.8 % 光通量红色比: 11.4 % 光通量绿色比: 82.1 % 光通量蓝色比: 6.5 %

显色指数: 85.2 AvgR: 78.3
R1: 94.0 R2: 88.3 R3: 72.7 R4: 88.4 R5: 91.8 R6: 81.9 R7: 87.5 R8: 77.3
R9: 32.3 R10: 67.4 R11: 79.0 R12: 51.1 R13: 90.0 R14: 84.5 R15: 87.8


色温: 19002 K 光通量: 4025.505 lm 峰值波长: 454.5 nm 色容差: 44.7
明暗视觉比: 3.1 中心波长: 454.1 nm 主波长: 480.7 nm 质心波长: 528.7 nm
半宽度: 30.9 nm 色偏差: 0.00994 色纯度: 34.2 % 色质指数: 85.9
LER(TM-30): 241.7 辐射功率: 16655.8 mw 色域指数(Rg): 100.8 逼真度(Rf): 79.9
红光辐射功率: 3592.2 mw 近红辐射功率: 139.3 mw 远红辐射功率: 23.5 mw

电参数:







光效: 9.6 Lm/W 能效: 10.4 能效等级: G
电压: 221.4 V 电流: 1.930 A 功率: 420.700 W 功率因素: 0.984

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/15/14
备注:

Rf: 79.9 CCT: 19002K u': 0.1747
Rg: 100.8 LER: 241.7 Duv: 0.00994 v': 0.4216

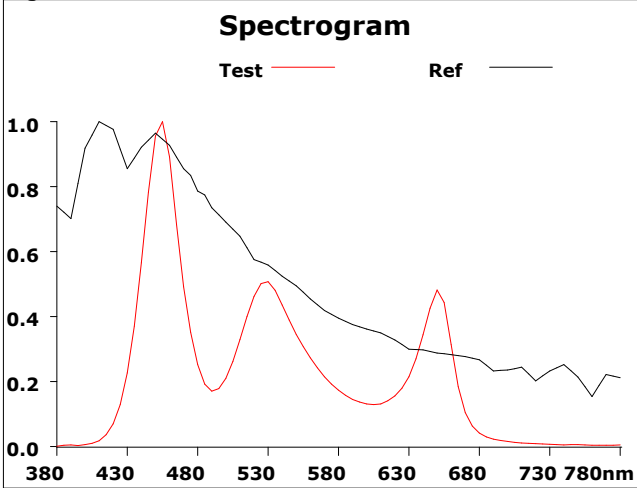

500			
Hue Bin	Rf	Chroma	Hue
1	75.6	10.4%	-1.5%
2	87.4	0.5%	-4.4%
3	88.4	-0.8%	-3.3%
4	85.5	-0.1%	3.3%
5	81.5	-3.0%	1.9%
6	89.6	-1.0%	-1.9%
7	75.8	-10.4%	-4.4%
8	83.1	-9.8%	2.8%
9	75.3	-10.2%	10.3%
10	72.2	-7.1%	20.7%
11	57.7	-1.1%	19.7%
12	73.1	0.1%	21.5%
13	77.2	1.6%	13.3%
14	80.5	6.6%	9.4%
15	71.9	22.2%	9.0%
16	85.1	4.1%	-1.7%

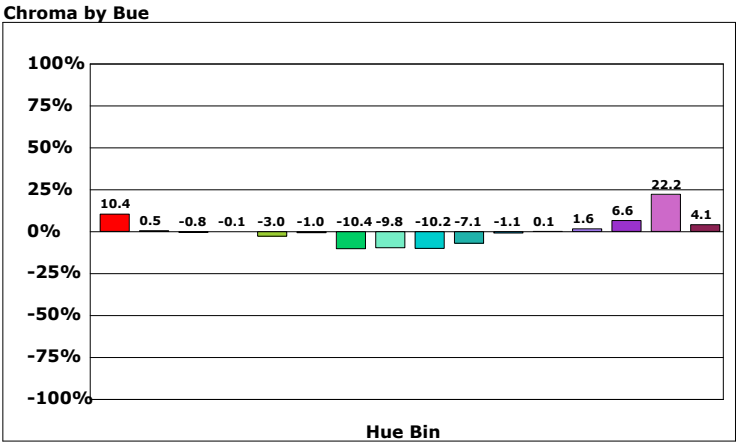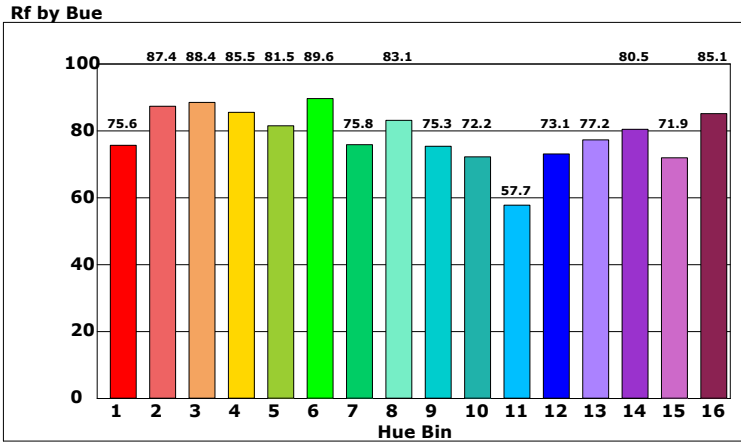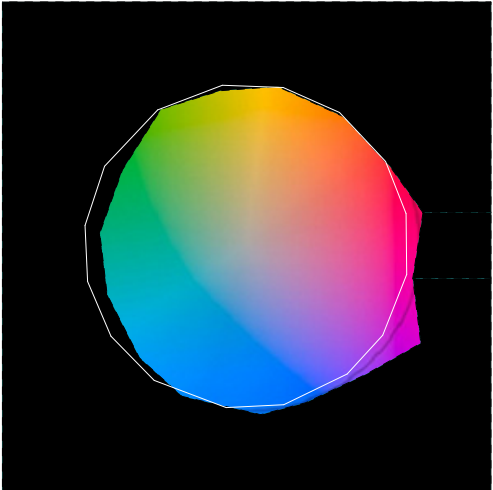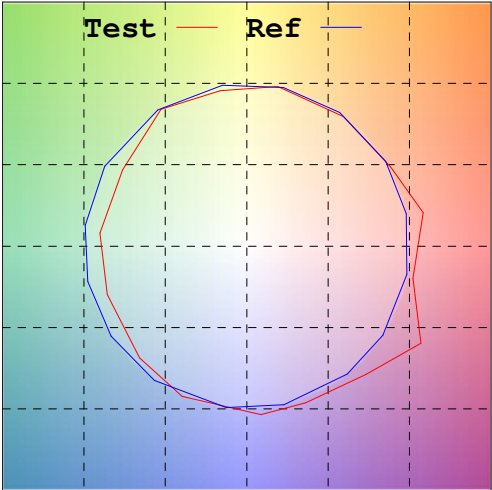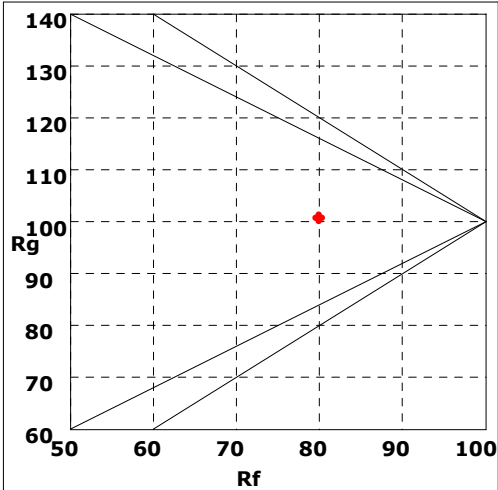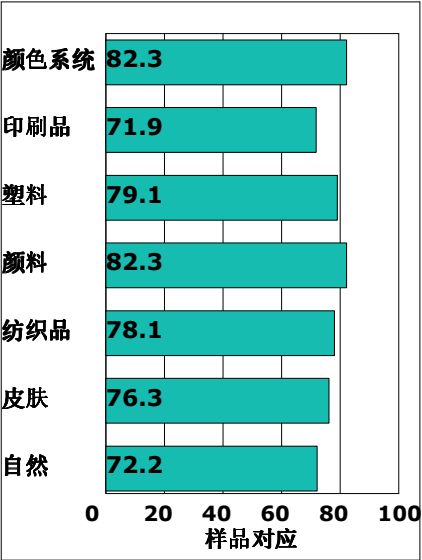

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:07/15/14

