



光谱图

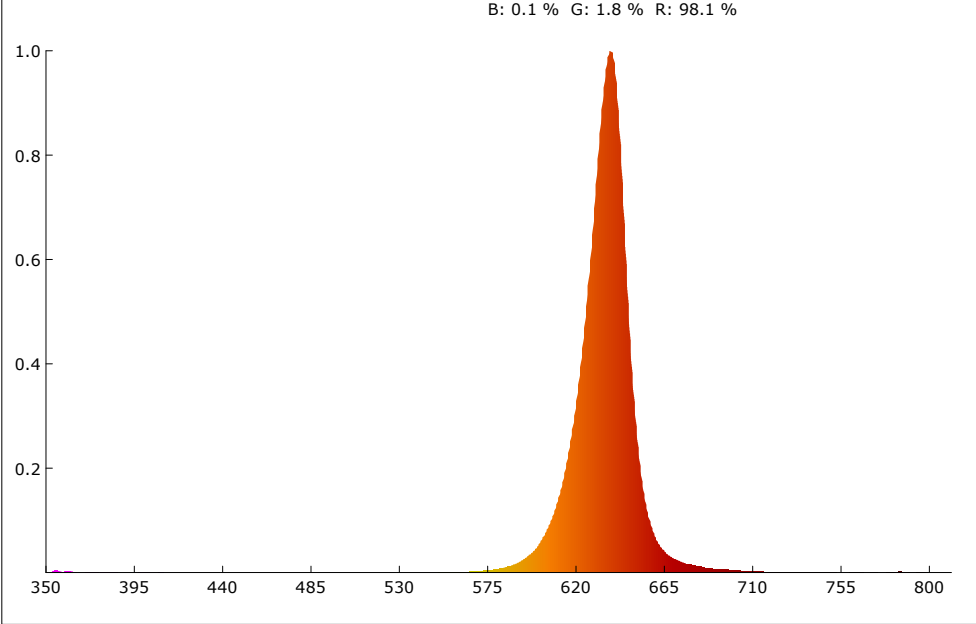

SDCM

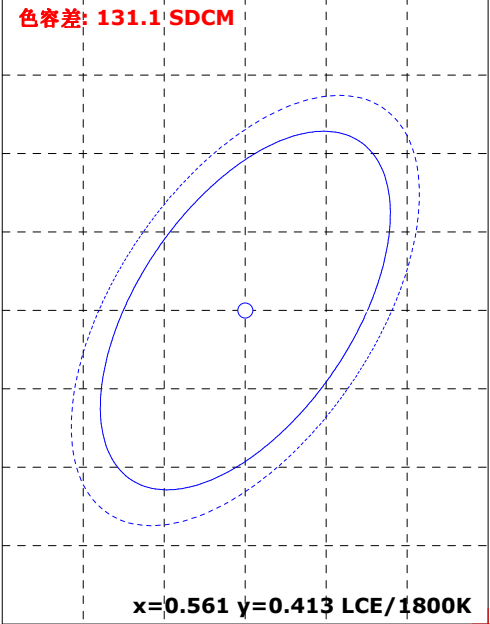

颜色参数:

坐标x: 0.6974 坐标y: 0.3014 坐标u: 0.5342 坐标v: 0.3463 坐标u': 0.5342 坐标v': 0.5195
红色比: 98.1 % 绿色比: 1.8 % 蓝色比: 0.1 % 光通量红色比: 93.8 % 光通量绿色比: 6.2 % 光通量蓝色比: 0.0 %

显色指数: 27.9 AvgR: 24.5
R1: 15.1 R2: 77.3 R3: 46.5 R4: -5.8 R5: 18.8 R6: 90.4 R7: 21.2 R8: -39.7
R9: -99.0 R10: 71.7 R11: 3.8 R12: 79.2 R13: 33.7 R14: 68.7 R15: -14.9


色温: 1000 K 光通量: 965.335 lm 峰值波长: 638.5 nm 色容差: 131.1
明暗视觉比: 0.1 中心波长: 636.3 nm 主波长: 623.8 nm 质心波长: 634.6 nm
半宽度: 21.4 nm 色偏差: -0.00856 色纯度: 99.7 % 色质指数: -nan(ind)
LER(TM-30): 161.1 辐射功率: 5991.2 mw 色域指数(Rg): 52.5 逼真度(Rf): 26.8
红光辐射功率: 5825.1 mw 近红辐射功率: 31.3 mw 远红辐射功率: 6.6 mw

电参数:





光效: 10.0 Lm/W 能效: 10.9 能效等级: G
电压: 220.9 V 电流: 0.483 A 功率: 96.470 W 功率因素: 0.903

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/15/14
备注:


Rf: 26.8 CCT: 1000K u': 0.5342
Rg: 52.5 LER: 161.1 Duv: 0.00256 v': 0.5195

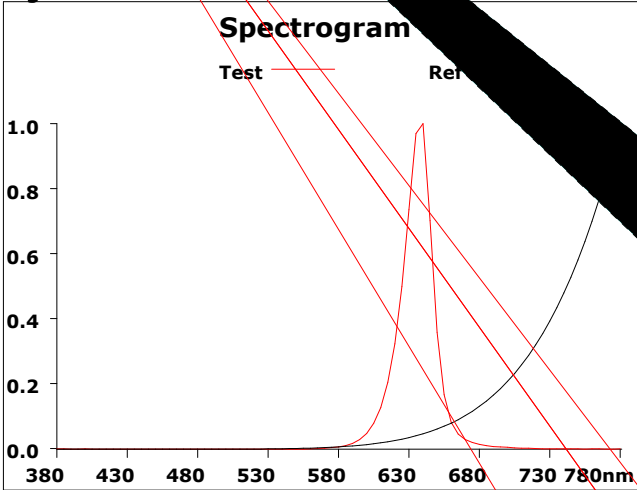


500			
Hue Bin	Rf	Chroma	Hue
1	14.4	-59.4%	17.2%
2	57.9	-54.8%	39.2%
3	75.4	-23.1%	59.2%
4	100.0	nan%	-nan(ind)%
5	95.5	-10.7%	12.6%
6	100.0	nan%	-nan(ind)%
7	70.7	-3.5%	5.6%
8	19.8	-43.2%	-13.2%
9	9.2	-50.9%	7.9%
10	16.4	-63.8%	32.9%
11	64.0	-39.3%	39.9%
12	49.7	-1.8%	-92.0%
13	33.8	1.1%	-53.8%
14	69.0	13.7%	13.7%
15	78.0	13.7%	13.7%
16	19.7	-4.1%	13.7%

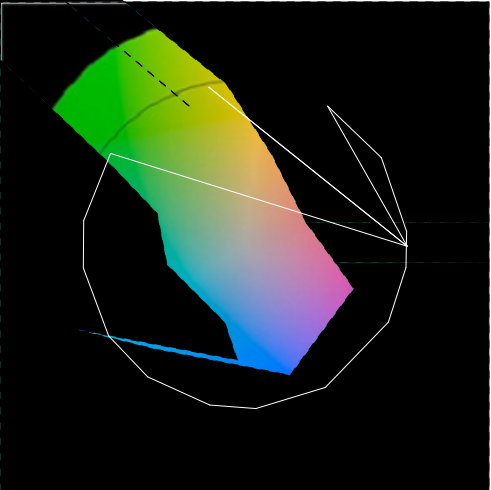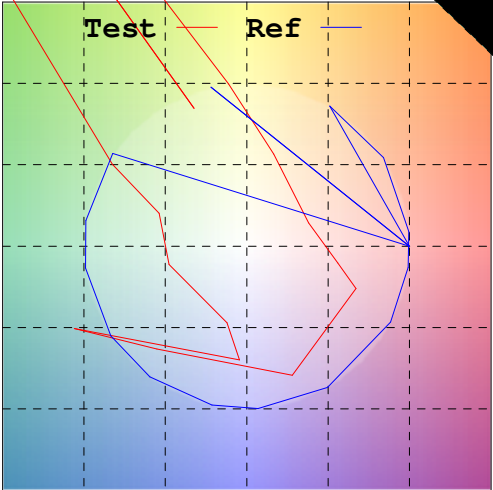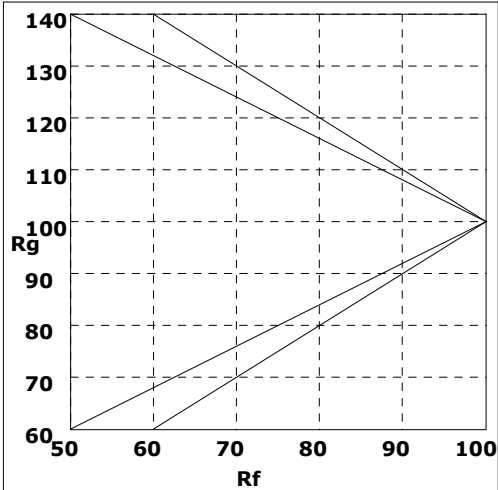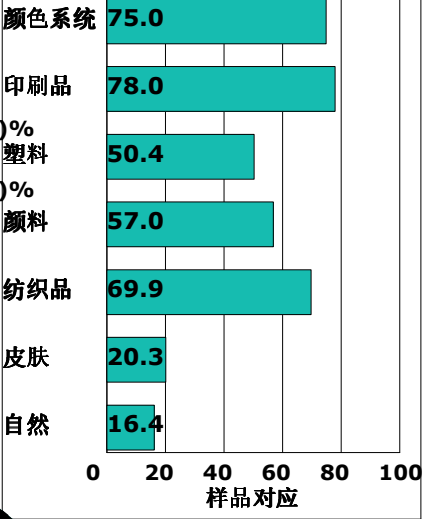

Rf by Bue

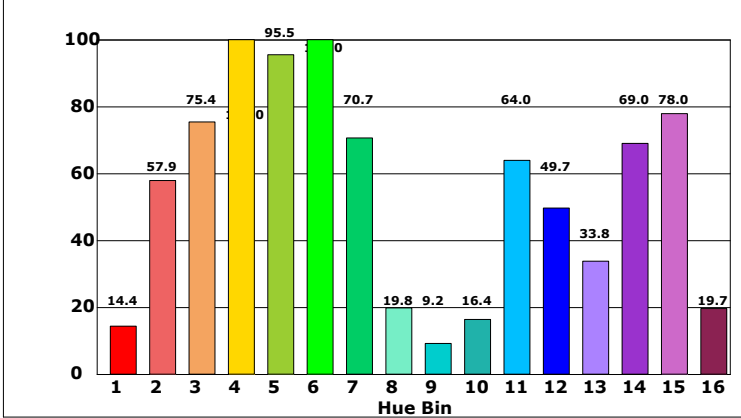

Chroma by Bue

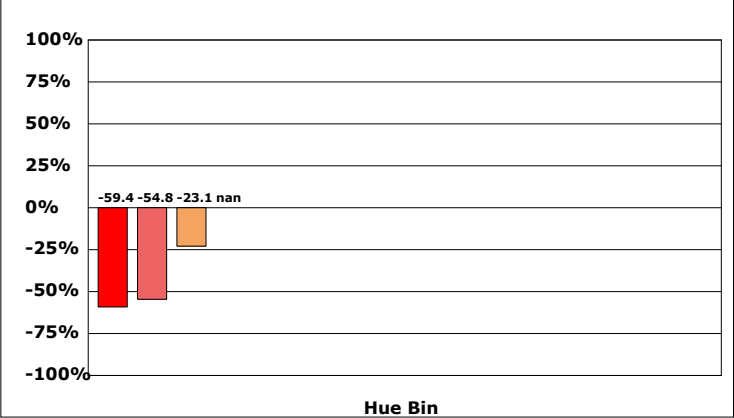

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173