



光谱图

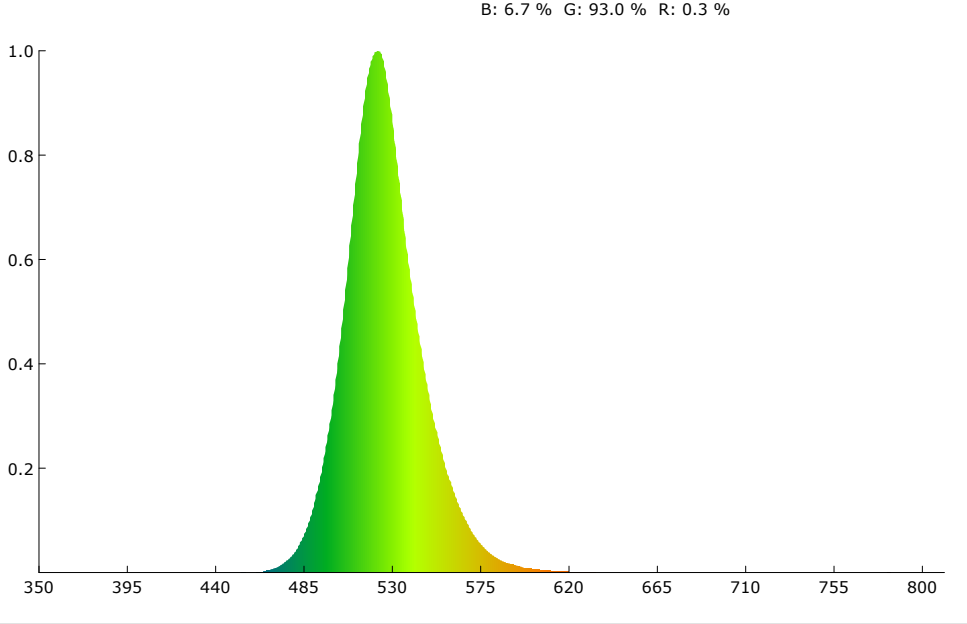

SDCM

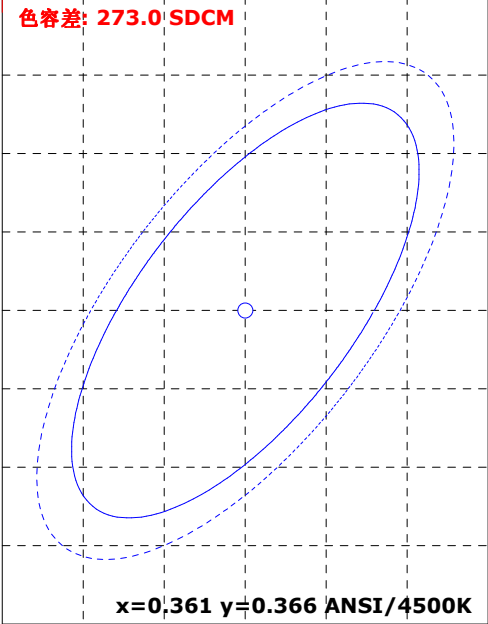

颜色参数:

坐标x: 0.1788 坐标y: 0.7239 坐标u: 0.0631 坐标v: 0.3834 坐标u': 0.0631 坐标v': 0.5751
红色比: 0.3 % 绿色比: 93.0 % 蓝色比: 6.7 % 光通量红色比: 0.2 % 光通量绿色比: 99.3 % 光通量蓝色比: 0.5 %

显色指数: -24.2 AvgR: -36.9
R1: -35.5 R2: -8.0 R3: -20.3 R4: -68.7 R5: -11.2 R6: -12.1 R7: -5.4 R8: -33.1
R9: -99.0 R10: -99.0 R11: -98.1 R12: -27.6 R13: -40.7 R14: 39.9 R15: -34.6


色温: 7699 K 光通量: 1720.673 lm 峰值波长: 522.6 nm 色容差: 273.0
明暗视觉比: 2.7 中心波长: 523.7 nm 主波长: 528.7 nm 质心波长: 526.5 nm
半宽度: 36.2 nm 色偏差: 0.15493 色纯度: 81.6 % 色质指数: 0.3
LER(TM-30): 499.4 辐射功率: 3445.3 mw 色域指数(Rg): 7.4 逼真度(Rf): 0.8
红光辐射功率: 10.9 mw 近红辐射功率: 0.2 mw 远红辐射功率: 0.3 mw

电参数:

光效: 18.2 Lm/W 能效: 19.8 能效等级: G
电压: 220.9 V 电流: 0.475 A 功率: 94.500 W 功率因素: 0.901

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/15/14
备注:

Rf: 0.8 CCT: 7699K u': 0.0631
Rg: 7.4 LER: 499.4 Duv: 0.15493 v': 0.5751

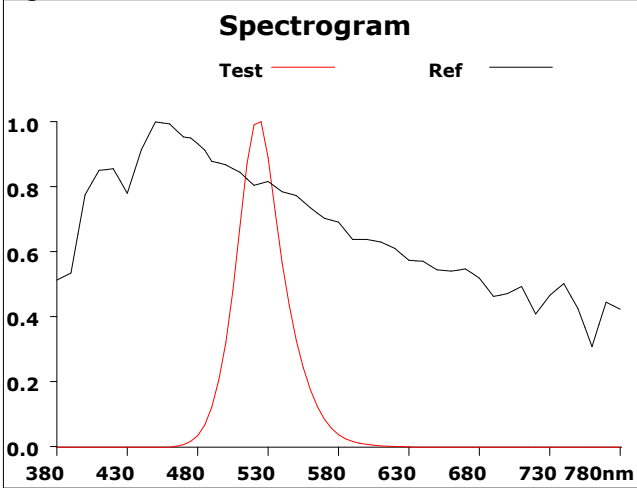

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-85.8%	1.8%
2	0.0	-72.1%	6.0%
3	0.2	-75.9%	-2.5%
4	3.0	-59.6%	-7.3%
5	0.9	-74.1%	-1.1%
6	0.4	-83.0%	2.4%
7	0.3	-77.3%	12.5%
8	0.0	-79.5%	14.9%
9	6.4	-65.3%	34.9%
10	13.4	-48.7%	22.3%
11	9.2	-44.2%	5.1%
12	25.1	-44.8%	-20.1%
13	19.1	-56.2%	-25.2%
14	0.1	-68.2%	-38.8%
15	2.5	-80.7%	-46.7%
16	0.0	-82.7%	-15.8%

