



光谱图

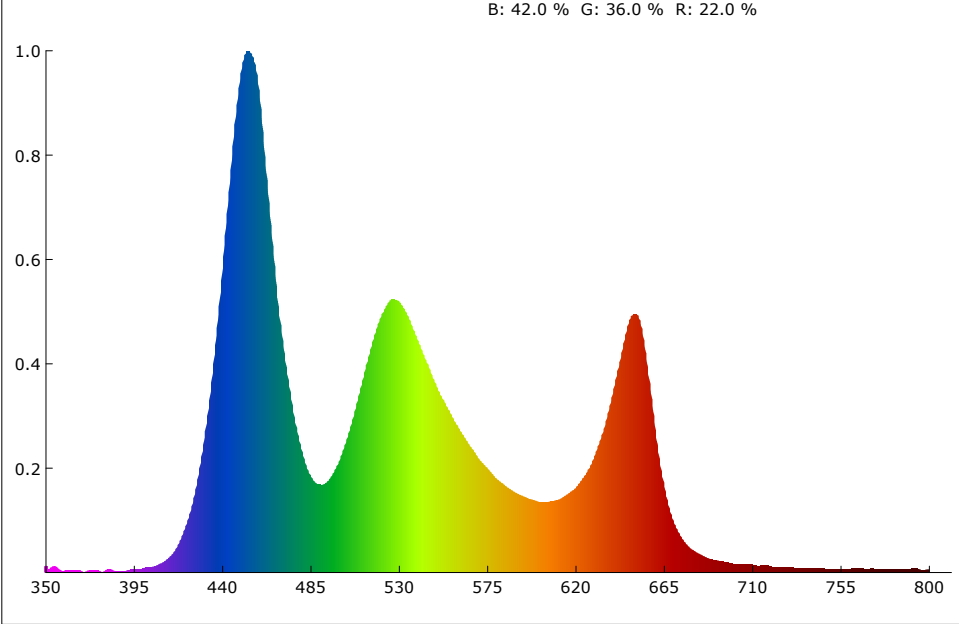

SDCM

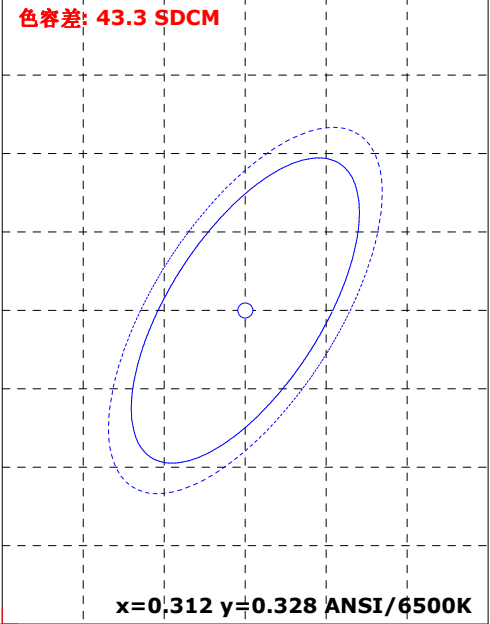

颜色参数:

坐标x: 0.2513      坐标y: 0.2729      坐标u: 0.1741      坐标v: 0.2837      坐标u': 0.1741      坐标v': 0.4255  
红色比: 22.0 %      绿色比: 36.0 %      蓝色比: 42.0 %      光通量红色比: 11.4 %      光通量绿色比: 82.4 %      光通量蓝色比: 6.3 %

显色指数: 84.5      AvgR: 78.4  
R1: 94.6      R2: 90.1      R3: 75.3      R4: 86.8      R5: 88.6      R6: 79.4      R7: 85.5      R8: 76.3  
R9: 36.5      R10: 69.9      R11: 77.7      R12: 50.3      R13: 91.4      R14: 86.2      R15: 87.3


色温: 16952 K      光通量: 3878.133 lm      峰值波长: 453.3 nm      色容差: 43.3  
明暗视觉比: 3.0      中心波长: 453.9 nm      主波长: 481.5 nm      质心波长: 529.8 nm  
半宽度: 30.6 nm      色偏差: 0.01135      色纯度: 33.0 %      色质指数: 86.1  
LER(TM-30): 248.7      辐射功率: 15596.6 mw      色域指数(Rg): 100.4      逼真度(Rf): 80.2  
红光辐射功率: 3377.0 mw      近红辐射功率: 141.9 mw      远红辐射功率: 26.0 mw

电参数:





光效: 11.1 Lm/W      能效: 12.1      能效等级: G  
电压: 221.5 V      电流: 1.610 A      功率: 350.000 W      功率因素: 0.981

产品型号:      制造厂商:Guangzhou Hotion Technology Co., Ltd  
产品编号:      测试单位:  
测试人员:      测试日期:07/15/14  
备注:


Rf: 80.2 CCT: 16952K u': 0.1741  
Rg: 100.4 LER: 248.7 Duv: 0.01135 v': 0.4255

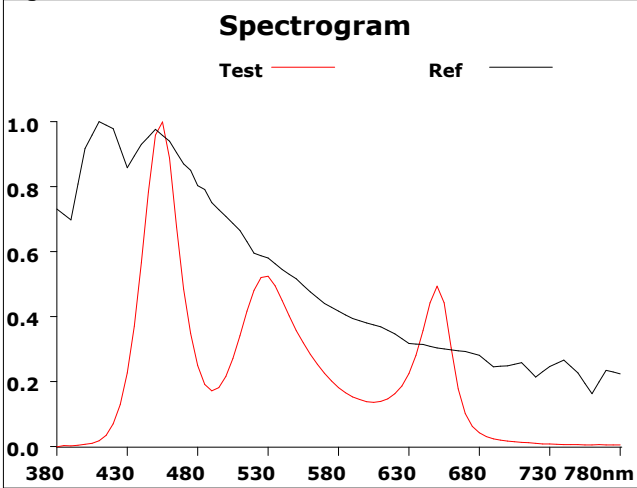

| 500     |      |        |       |
|---------|------|--------|-------|
| Hue Bin | Rf   | Chroma | Hue   |
| 1       | 76.7 | 9.7%   | -1.7% |
| 2       | 87.1 | 0.3%   | -4.4% |
| 3       | 88.9 | -1.0%  | -3.0% |
| 4       | 85.6 | -0.2%  | 3.5%  |
| 5       | 82.6 | -4.0%  | 1.3%  |
| 6       | 88.2 | 0.5%   | -0.9% |
| 7       | 74.9 | -13.6% | -3.3% |
| 8       | 82.8 | -9.0%  | 1.0%  |
| 9       | 75.6 | -10.3% | 10.0% |
| 10      | 72.6 | -7.2%  | 20.3% |
| 11      | 58.0 | -1.2%  | 19.5% |
| 12      | 73.7 | 0.3%   | 21.0% |
| 13      | 77.8 | 1.7%   | 12.9% |
| 14      | 81.2 | 6.6%   | 8.8%  |
| 15      | 73.0 | 21.6%  | 8.0%  |
| 16      | 85.2 | 3.9%   | -2.1% |

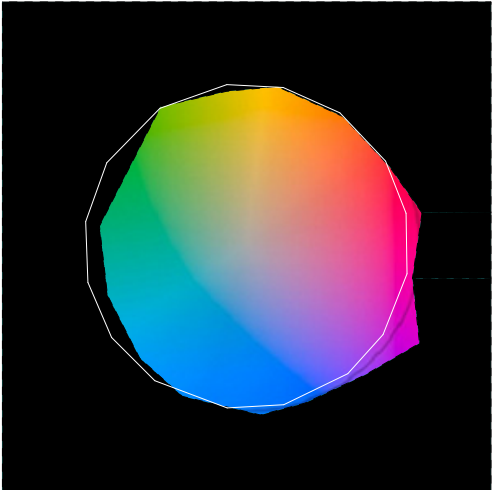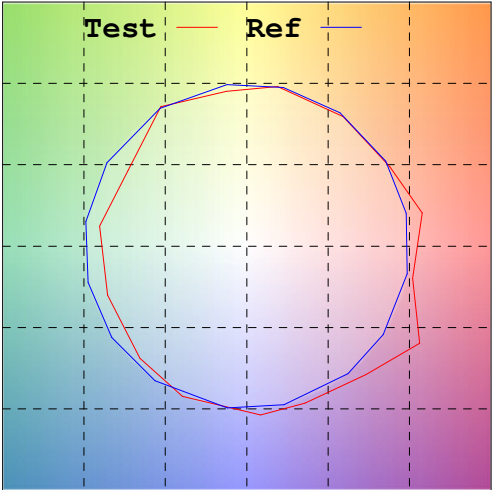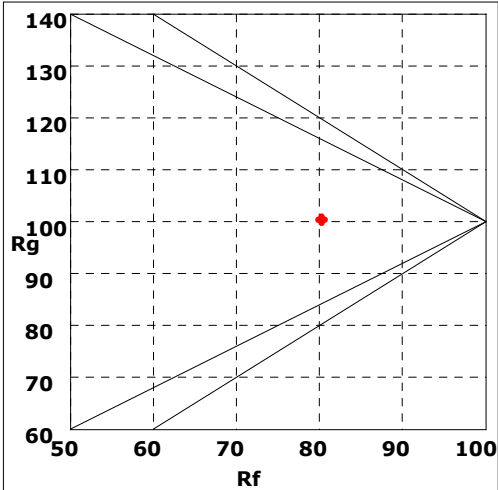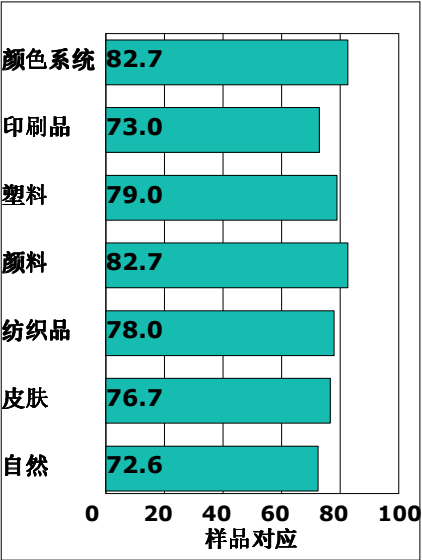

Rf by Bue

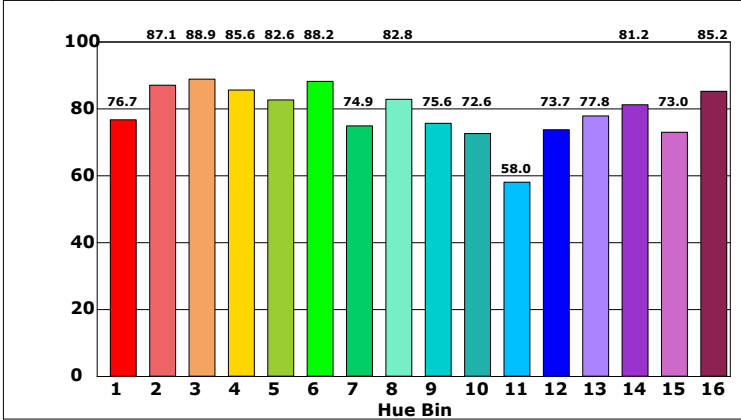

Chroma by Bue

