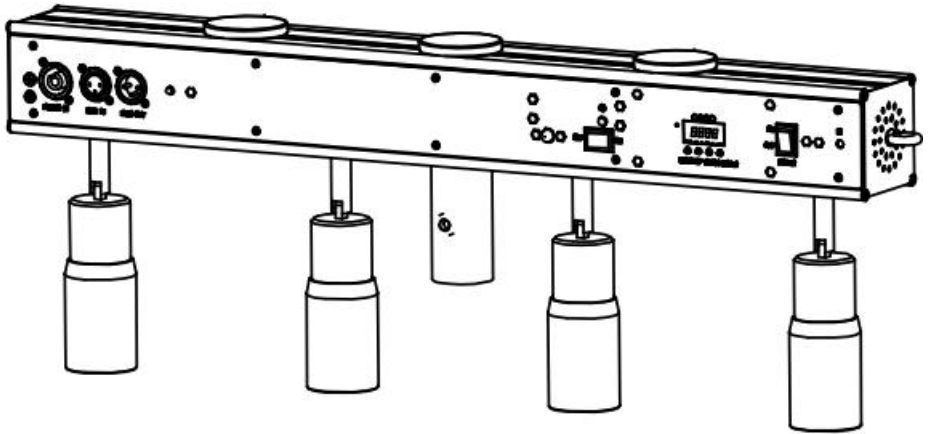

Battery 4x10w LED BAR Zoom

User Manual



This manual contains important information.
Please read before operating fixture.

1 SECURITY TIPS

WARNING!!! To reduce the risk of fire, electric shock, or injury to persons, follow these important safety instructions:

- Non-professionals, not to disassemble the light arbitrarily and lighting accessories inside.
- Rated voltage range: AC110V-120V/60Hz or AC200V-240V / 50HZ (to be selected).
- Not beam irradiate the flammable materials, flammable materials and the lamp should be maintained at least 1M over the distance.
- Lamps used in ambient temperature: -15 °C -40 °C, the highest temperature of the surface of the lamp: 60 °C.
- To keep away from the liquid substance and humid environment.
- Before using the lights must ensure the good grounding, can not install charging and remove any parts.
- The installation of lights, must be fixed screw fasteners with additional security cable and regular inspection.
- Lamps consecutive working hours is not recommended more than 10 hours.
- Should stop using the lights in time when happens unusual conditions during the process.
- Lamp parts of the rotation, external accessories and paste parts should be regular inspected, such as the emergence of loose and rock, should be reinforced in a timely manner to prevent the accident.
- Lamps adopt strong winds to refrigerate, it is easy to accumulate the dust, so you have to clean it weekly especially the cooling air opening, otherwise the dust will plug leading to poor light.

2 TECHNOLOGY REFERENCE

Voltage : AC 100V-240V 50-60Hz

Power consumption :40W

Light Color : 4*10W Led COB Warm white, each Led Pixel control

Led life: 50000hours

Manual zoom:6-37°

Light Head adjustable: Horizontal 360°, Vertical 90°

Dimmer : 0-100% linear adjustable

Strobe: 1-25times/s

Color temperature: 2700K $\pm$ 100

Control mode : DMX512 , Master/Slave , Auto,Sound, Wireless,remote, RDM

DMX Channel :5 CH

Power connector : Power con in

DMX connector: 5-pin dmx IN/OUT

Control panel : LED display, with 4buttons

Housing material : aluminum alloy

Housing color : black

Install: With three strong Magnet for quick installation; With 2 Clamp position for hang to truss.

IP rate : IP20

Working temperature : -30C ° -- 40 C °

Product size: 660*74*238mm

Net weight:3.33kg

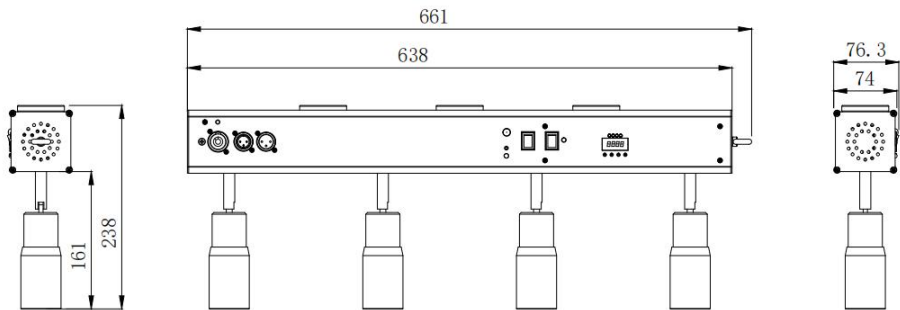
Battery type: Lithium Ion

Battery Power: 11.1V, 8.8Ah

Battery Charge Time: 6 hours(full power)

Battery Life: (all on) 3hours, (single Led single color) 12hours

Product Dimension:



3 Board Instruction



MENU UP DOWN ENTER

NO.	Display	Description
1	A001-A512	DMX address , Up / Down to change the value
2	d001-d099	Total Dimmer
3	d 101- d 199	LED1 Warm white linear dimmer , from dark to bright
4	d 201- d 299	LED2 Warm white linear dimmer , from dark to bright
5	d 301- d 399	LED3 Warm white linear dimmer , from dark to bright
6	d 401- d 499	LED4 Warm white linear dimmer , from dark to bright
7	St 00-99	Strobe from slow to fast
8	Su00-99	Sound
9	Ju00-99	Jump effect from 00-99
10	Fa00-99	Fade effect from 00-99

4 DMX CHANNEL SHEET

5 Channel		
Channel	Value	Function
CH1	0-255	Total Dimmer, 0-100%
CH2	0-255	LED1 Warm white dimmer 0-100%
CH3	0-255	LED2 Warm white dimmer 0-100%
CH4	0-255	LED3 Warm white dimmer 0-100%
CH5	0-255	LED4 Warm white dimmer 0-100%

5 AFTER SERVICE

1. Our company offer technical consultation to customers for ever.
2. If the machine is wrong and need repairmen, please truthfully fill in the related content and feedback us the problems timely, as well as we have to improve the product.
3. In addition to the lamp, also matching accessories are as follows:

accessories: Power line 1 piece **Optional parts:** (customers)



Warranty Card

Name	Model	Production	Purchase
------	-------	------------	----------

End User
Company Name:
Add:

Sale Store
Link man:
Tel: Stamp

Description: These must be truthfully fill, seal by the end-user and point-of-sale, or else the warranty will not work (warranty period and terms, see the following)

warranty period: one year since purchase warranty terms: 1、 If fail when using the product in normal state, you can made under the provisions of the warranty, show the warranty card and purchase bills(copy), and enjoy free maintenance service in a specific service center or the manufacturer.

2. The following will be the implementation of paid service:

- (1)Without the effective warranty card
- (2)There's blank, alter and no point-of-sale name
- (3)Fail caused by unresistance
- (4)Fail caused by transportation or unloading
- (5)Fail caused by not operate by manual
- (6)Fail caused by disassemble without unauthorized
- (7)Fail caused by using the unauthorized control system

Note:

Based on our company continue to improve the product, the statement containing data may have changed, and will not notice the change any more. Company retains its right to change specifications related when product is improved. Thanks for your understanding.