



光谱图

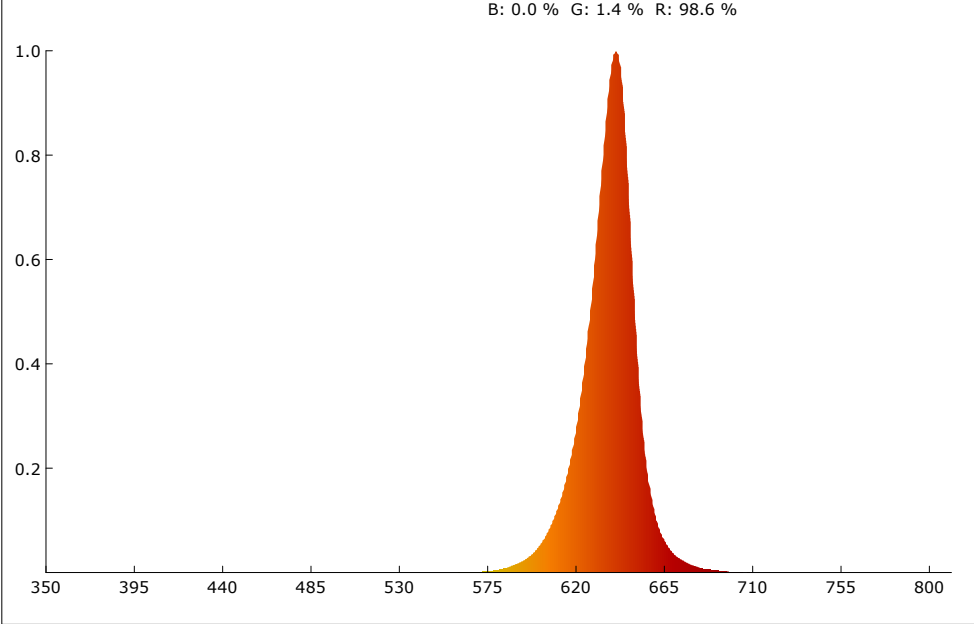

SDCM

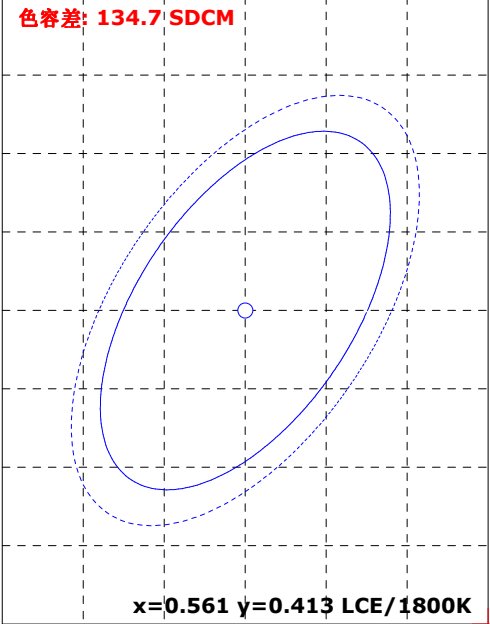

颜色参数:

坐标x: 0.7013 坐标y: 0.2986 坐标u: 0.5415 坐标v: 0.3458 坐标u': 0.5415 坐标v': 0.5187
红色比: 98.6 % 绿色比: 1.4 % 蓝色比: 0.0 % 光通量红色比: 94.7 % 光通量绿色比: 5.3 % 光通量蓝色比: 0.0 %

显色指数: 22.2 AvgR: 19.1
R1: 6.9 R2: 73.4 R3: 43.4 R4: -15.4 R5: 10.7 R6: 84.8 R7: 19.0 R8: -45.1
R9: -99.0 R10: 66.8 R11: -8.2 R12: 79.9 R13: 26.2 R14: 65.9 R15: -22.2


色温: 1000 K 光通量: 724.104 lm 峰值波长: 640.9 nm 色容差: 134.7
明暗视觉比: 0.0 中心波长: 638.9 nm 主波长: 625.4 nm 质心波长: 637.3 nm
半宽度: 22.6 nm 色偏差: 0.01135 色纯度: 100.0 % 色质指数: -nan(ind)
LER(TM-30): 148.9 辐射功率: 4864.6 mw 色域指数(Rg): -0.0 逼真度(Rf): 18.7
红光辐射功率: 4793.2 mw 近红辐射功率: 2.3 mw 远红辐射功率: 0.0 mw

电参数:





光效: 8.2 Lm/W 能效: 9.0 能效等级: G
电压: 220.9 V 电流: 0.446 A 功率: 87.870 W 功率因素: 0.892

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/15/14
备注:


Rf: 18.7 CCT: 1000K u': 0.5415
Rg: -0.0 LER: 148.9 Du: 0.01135 v': 0.5187

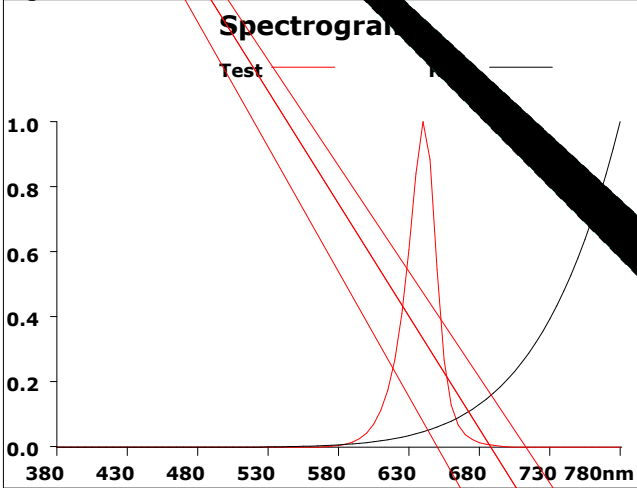


500			
Hue Bin	Rf	Chroma	Hue
1	14.0	-61.2%	-3.2%
2	49.0	-78.2%	-18.0%
3	64.8	-101.8%	2.9%
4	100.0	nan%	-nan(ind)%
5	75.2	-84.7%	35.5%
6	100.0	nan%	-nan(ind)%
7	57.0	-16.0%	37.7%
8	12.8	-49.7%	-3.8%
9	1.0	-65.4%	-7.4%
10	1.3	-100.4%	2.4%
11	37.4	-101.3%	10.6%
12	19.9	-98.7%	-115.0%
13		-121.1%	-41.5%
14	5.7	-77.7%	29.4%
15	72.5	83.3%	17.9%
16	23.5	13.3%	-8.0%

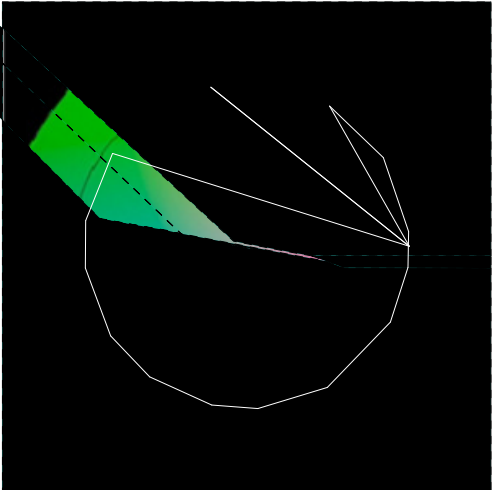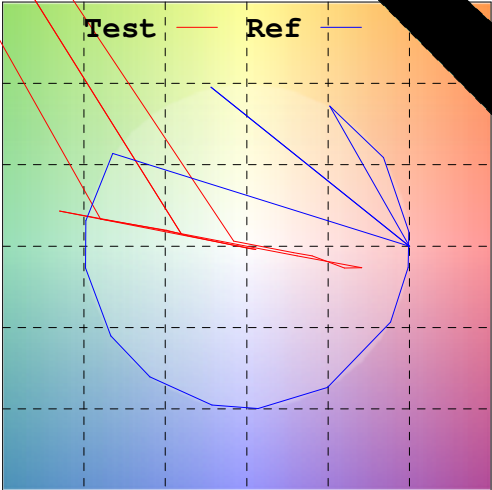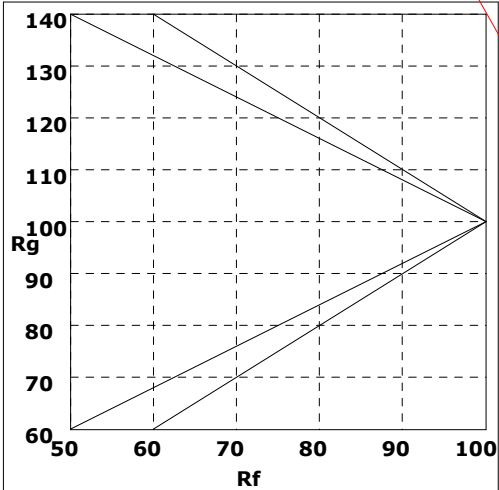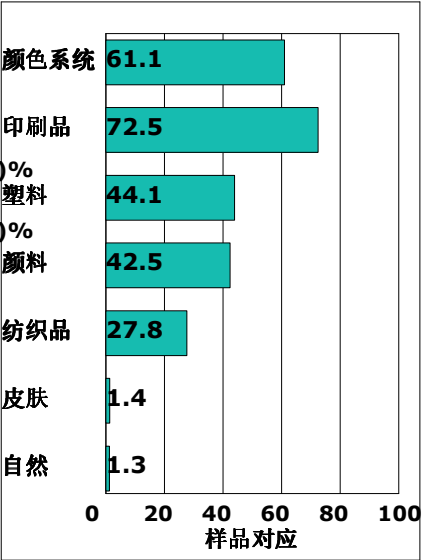

Rf by Bue

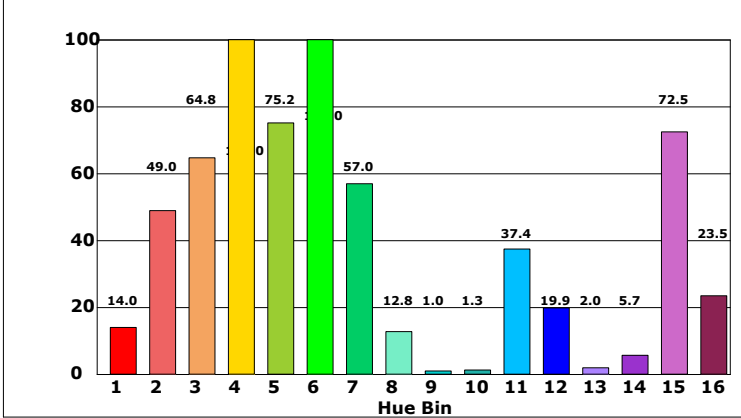

Chroma by Bue

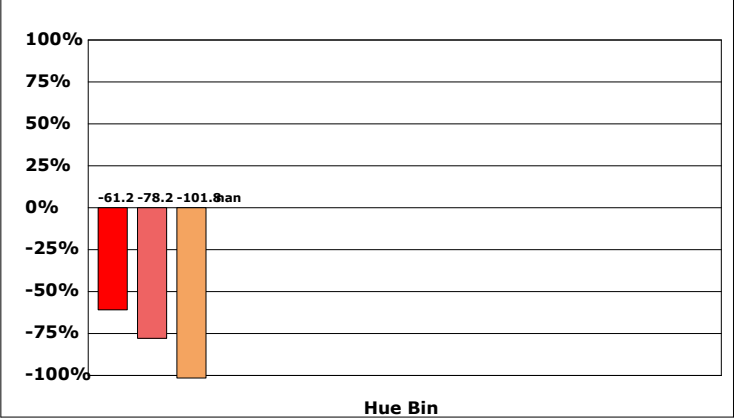

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173