



光谱图

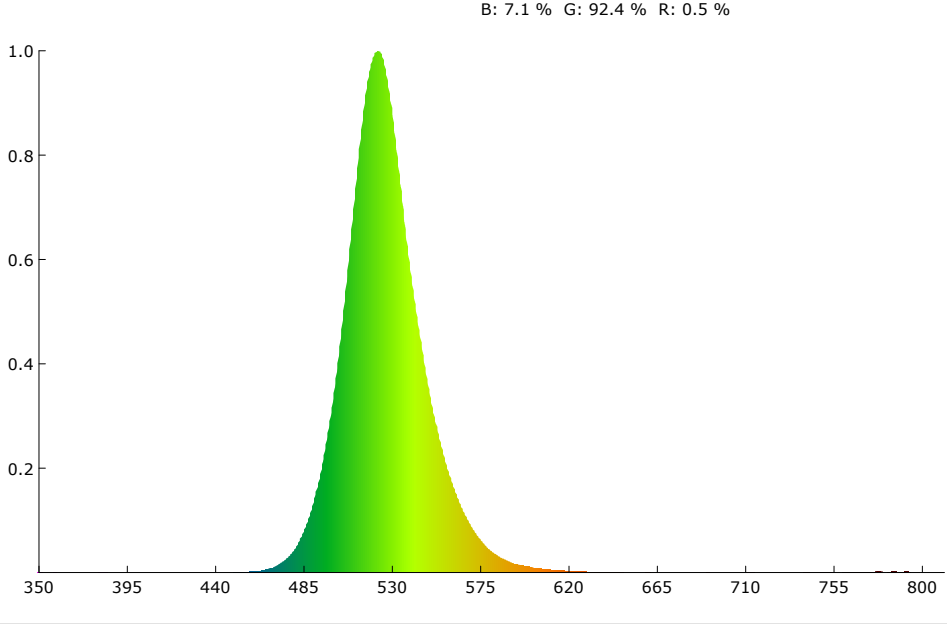

SDCM

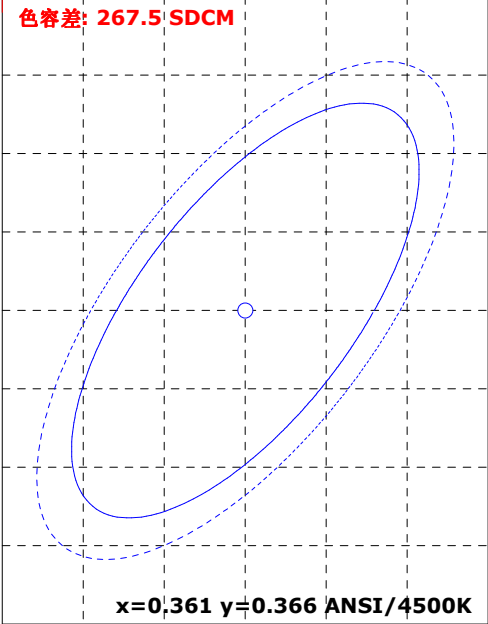

颜色参数:

坐标x: 0.1835 坐标y: 0.7177 坐标u: 0.0653 坐标v: 0.3829 坐标u': 0.0653 坐标v': 0.5743
红色比: 0.5 % 绿色比: 92.4 % 蓝色比: 7.1 % 光通量红色比: 0.3 % 光通量绿色比: 99.2 % 光通量蓝色比: 0.6 %

显色指数: -21.4 AvgR: -34.2
R1: -34.2 R2: -4.7 R3: -14.4 R4: -64.4 R5: -9.8 R6: -9.9 R7: -2.6 R8: -31.7
R9: -99.0 R10: -95.9 R11: -93.2 R12: -24.4 R13: -38.5 R14: 43.0 R15: -33.6


色温: 7656 K 光通量: 1770.686 lm 峰值波长: 523.6 nm 色容差: 267.5
明暗视觉比: 2.7 中心波长: 524.1 nm 主波长: 529.1 nm 质心波长: 527.4 nm
半宽度: 36.6 nm 色偏差: 0.15279 色纯度: 80.6 % 色质指数: 0.4
LER(TM-30): 497.9 辐射功率: 3556.0 mw 色域指数(Rg): 9.1 逼真度(Rf): 1.1
红光辐射功率: 17.9 mw 近红辐射功率: 5.4 mw 远红辐射功率: 2.1 mw

电参数:

光效: 19.4 Lm/W 能效: 21.2 能效等级: G
电压: 221.0 V 电流: 0.459 A 功率: 91.110 W 功率因素: 0.896

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:07/15/14
备注:

Rf: 1.1 CCT: 7656K u': 0.0653
Rg: 9.1 LER: 497.9 Duv: 0.15279 v': 0.5743

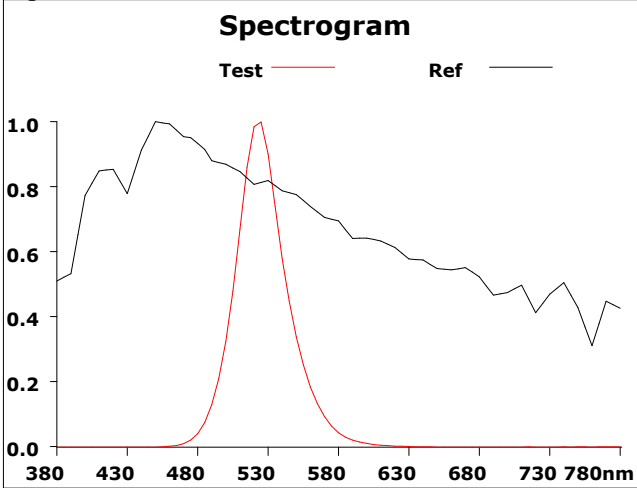

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-83.7%	1.1%
2	0.0	-69.7%	5.5%
3	0.4	-73.7%	-2.1%
4	4.1	-57.6%	-7.1%
5	1.3	-72.1%	-1.2%
6	0.6	-80.3%	1.8%
7	0.4	-74.4%	11.0%
8	0.0	-77.6%	14.0%
9	7.3	-63.9%	34.5%
10	15.0	-47.1%	22.7%
11	5.0	-44.6%	5.3%
12	36.4	-36.6%	-20.0%
13	22.3	-53.0%	-25.3%
14	0.4	-63.8%	-37.1%
15	1.6	-78.1%	-40.2%
16	0.0	-79.5%	-16.7%

