


Waterproof 300W LED Profile Spot Light



User's Manual

1. The Introduction of LED display panel:

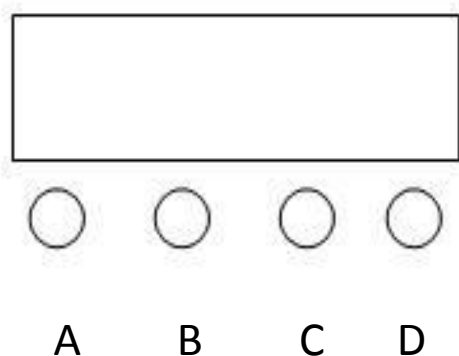

- A. Menu
- B. Up
- C. Down
- D. Enter
- E. LCD Display

Operation Instructions: Pressing function key A will cycle through eight different function effects. The first two digits of the digital tube represent the current function (refer to the function table). The last two digits represent the address code or speed parameter of the function. Press B or C to modify the parameter value. Press D to confirm.

2. Function of LED Display Window (press button D to confirm all the function)

Main menu	Secondary Menu	Tertiary Menu	Default Value
Brightness	Dimmer	000--255	255
	Fine Adjustment	00000--65535	65535
Screen background color	R	0--255	065
	G	0--255	105
	B	0--255	230
root	Enter password	----- (Add key↑) (Subtract key↓)	
	Current	020--255	235
	Temperature	40--80	55
	Push	Yes/No	No
	Change Password		
Macro Function	Effect	Pulse changes	Pulse changes
	Speed	0--100%	50%
	Brightness	0--100%	100%
DMX	Address	Address 001-512	001
	CH	2CH	2CH
	Signal Status	Clear	Clear
		Keep	
	Screensaver	On/Off	On
	EN	中文	中文
		English	
	LOOK	Yes/No	Yes
	Dimming curve	Linear	Linear
		Square	

Set Up		Reversal	
		S line	
	Dimming frequency	2-19K	14K
	Dimming Mode	Stage	Stage
		Theater	
		Meeting	
	Fan mode	Controllable	Controllable
		Frequent transfer	
	Factory Reset	Yes/No	No
	Rotate the screen	Yes/No	No
	LOGO	Yes/No	No

3. DMX512 Channel

Channel	Function	Explanation
CH1	Dimmer	linear 0%-100% dimmer, from dark to bright
CH2	Strobe	From slow to fast

4. TECHNICAL PARAMETER

Input Power: 300W

Input voltage: AC110—260V 50/60HZ

Light source: COB-300W

Lifespan: 50000h

Control model: manual/DMX512

Control channels: 2CH

Color temperature: 5600K

Luminescence angle: 19°

Ra: Ra 95

IP:65

The operation is very simple, the humanized design, dimming without flickering, jitter, etc. It can be used in photography, photo shooting, TV stations and other occasions with strict requirements on lighting.