



光谱图

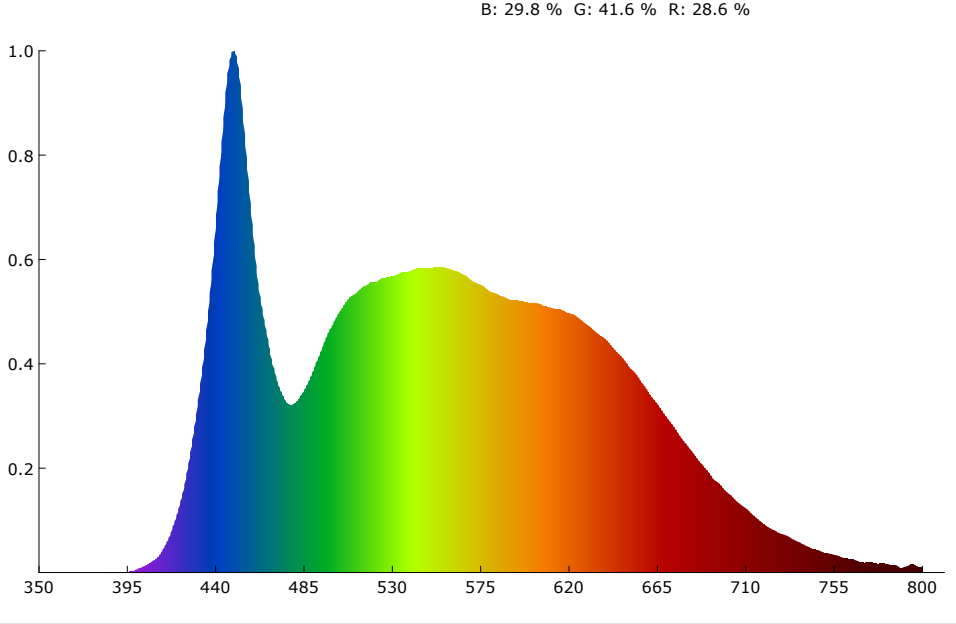

SDCM

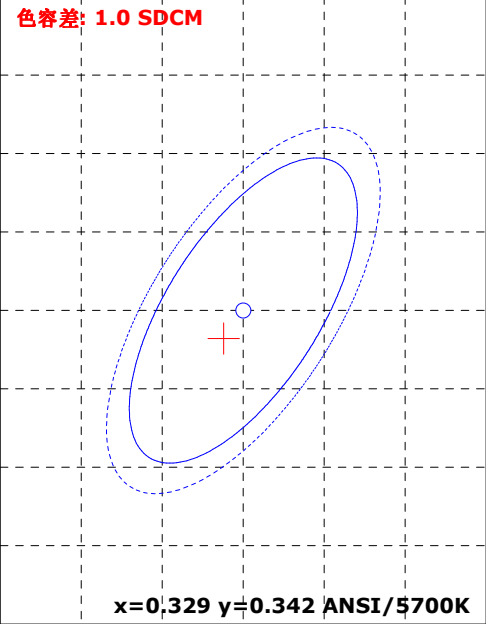

颜色参数:

坐标x: 0.3275 坐标y: 0.3399 坐标u: 0.2039 坐标v: 0.3175 坐标u': 0.2039 坐标v': 0.4762
红色比: 28.6 % 绿色比: 41.6 % 蓝色比: 29.8 % 光通量红色比: 15.2 % 光通量绿色比: 81.1 % 光通量蓝色比: 3.7 %

显色指数: 91.4 AvgR: 88.4
R1: 92.2 R2: 92.5 R3: 91.3 R4: 92.3 R5: 92.0 R6: 88.8 R7: 93.8 R8: 89.1
R9: 66.8 R10: 81.5 R11: 92.4 R12: 74.5 R13: 92.1 R14: 95.1 R15: 91.5


色温: 5723 K 光通量: 1311.854 lm 峰值波长: 449.6 nm 色容差: 1.0
明暗视觉比: 2.2 中心波长: 450.4 nm 主波长: 507.4 nm 质心波长: 555.5 nm
半宽度: 27.0 nm 色偏差: 0.00167 色纯度: 1.8 % 色质指数: 89.2
LER(TM-30): 283.3 辐射功率: 4631.0 mw 色域指数(Rg): 100.4 逼真度(Rf): 89.4
红光辐射功率: 1271.4 mw 近红辐射功率: 170.8 mw 远红辐射功率: 9.7 mw

电参数:




光效: 35.9 Lm/W 能效: 39.0 能效等级: G
电压: 220.7 V 电流: 0.291 A 功率: 36.590 W 功率因素: 0.568

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:


Rf: 89.4 CCT: 5723K u': 0.2039
Rg: 100.4 LER: 283.3 Duv: 0.00167 v': 0.4762

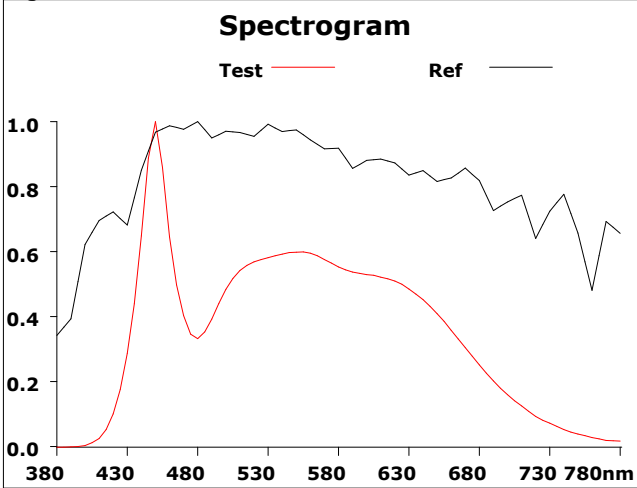


500			
Hue Bin	Rf	Chroma	Hue
1	89.2	-4.6%	-1.3%
2	92.1	-3.4%	2.6%
3	87.2	-1.7%	6.2%
4	89.8	0.6%	5.4%
5	89.2	1.9%	3.6%
6	94.5	3.4%	0.4%
7	96.2	0.0%	-1.9%
8	93.3	-2.9%	-1.1%
9	91.5	-4.9%	3.9%
10	84.5	-3.3%	7.8%
11	79.7	0.9%	11.3%
12	89.2	2.9%	5.9%
13	91.3	6.3%	1.3%
14	90.3	4.5%	-2.2%
15	83.9	7.5%	-11.0%
16	92.3	-1.0%	-3.9%

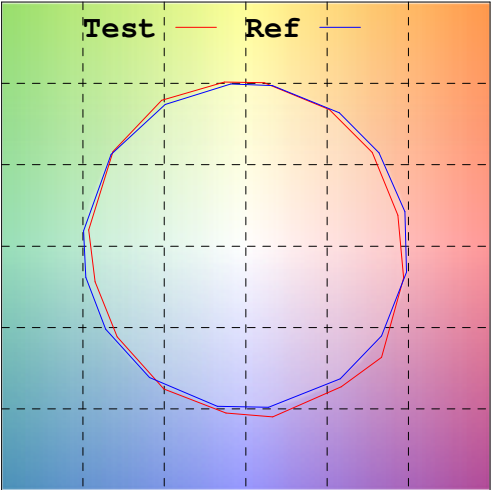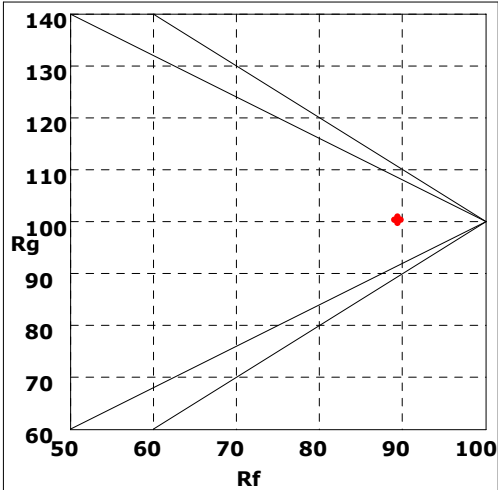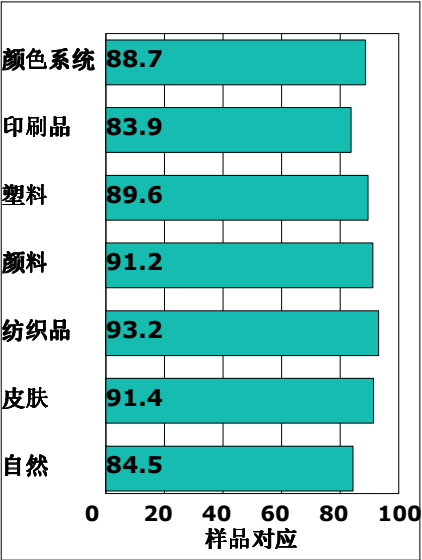




Rf by Bue

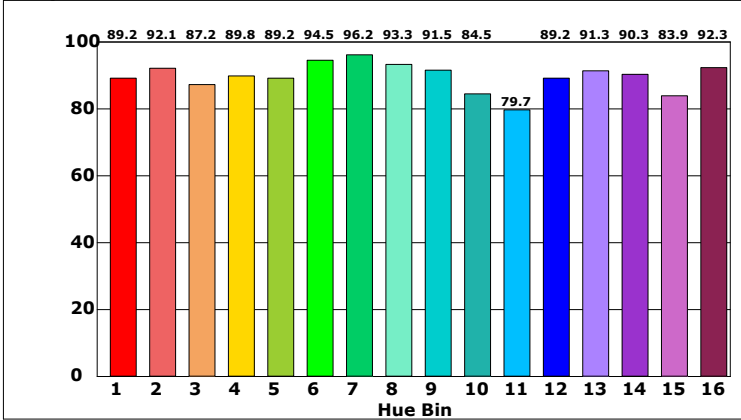

Chroma by Bue

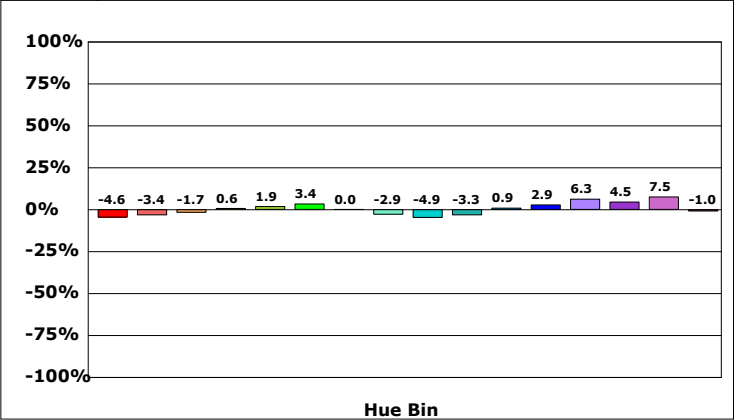


产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:

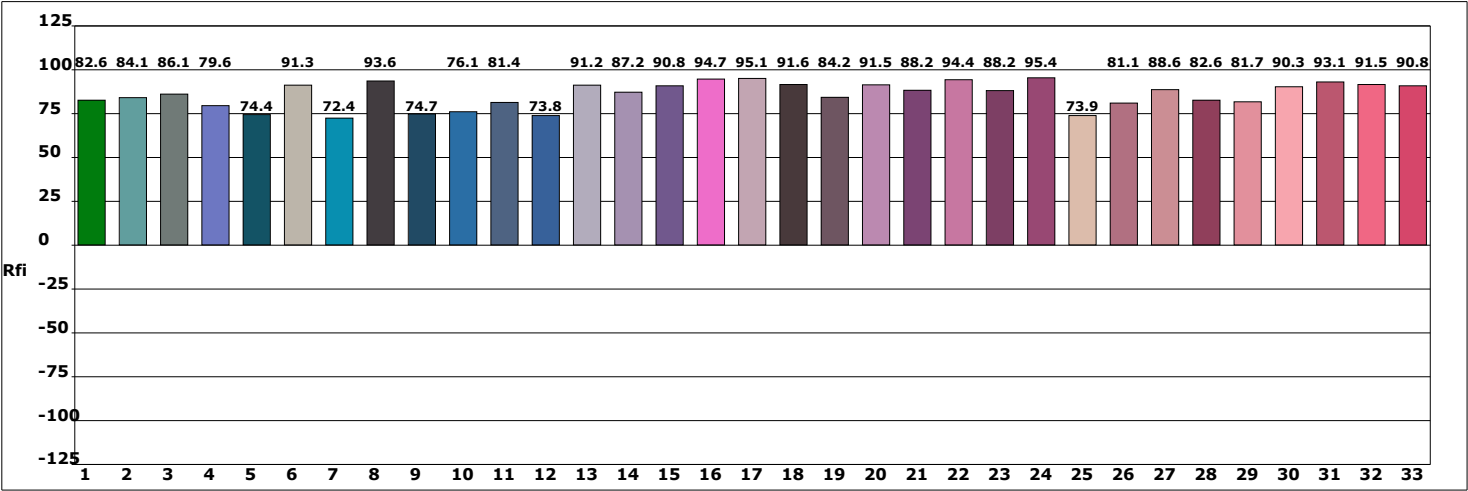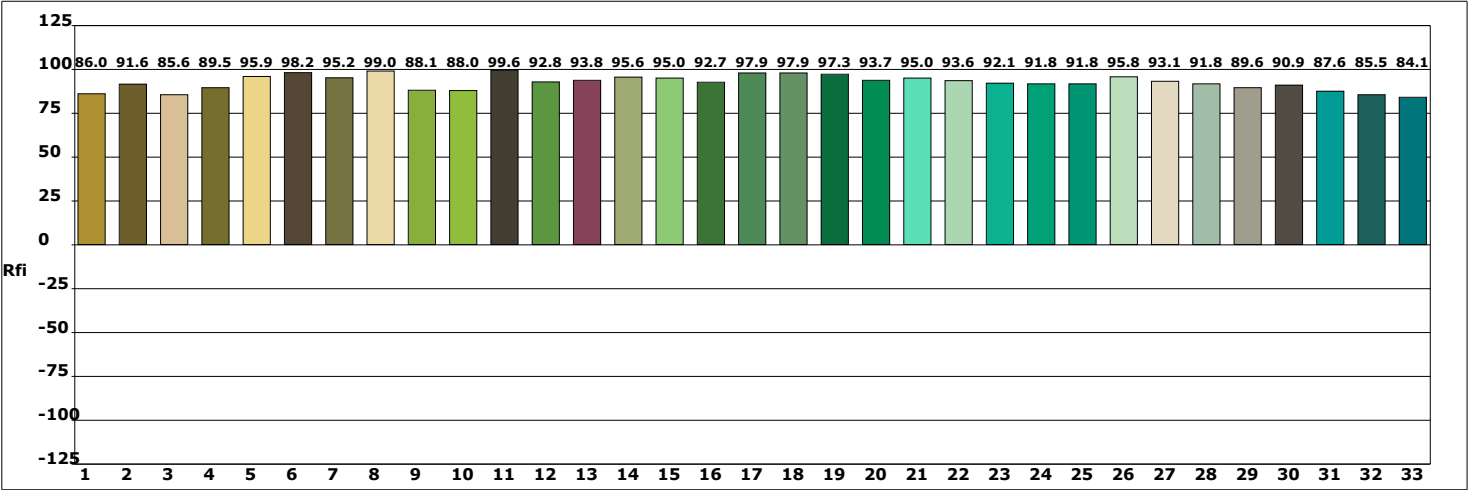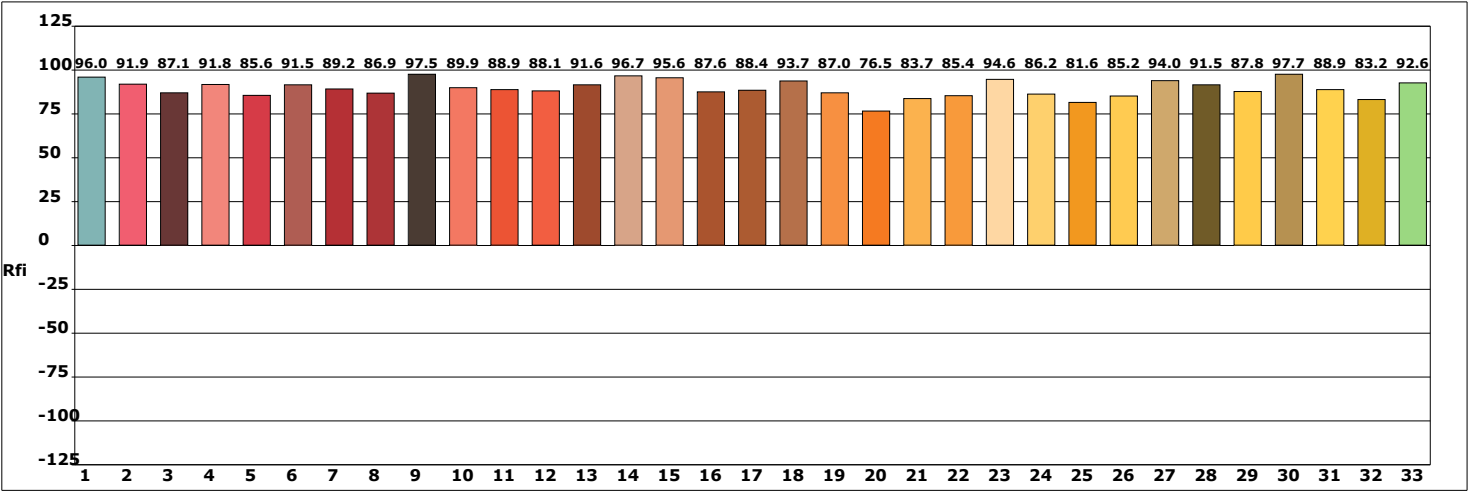


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

光谱图

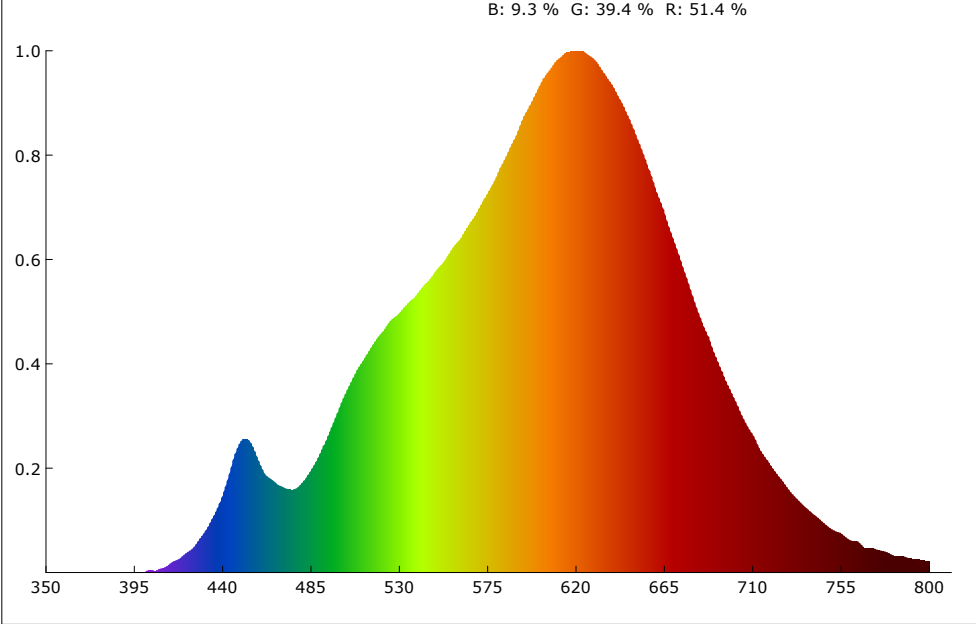

SDCM

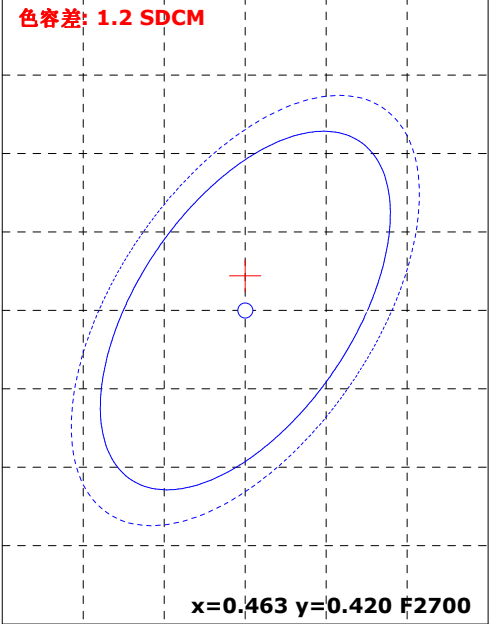

颜色参数:

坐标x: 0.4650 坐标y: 0.4222 坐标u: 0.2606 坐标v: 0.3550 坐标u': 0.2606 坐标v': 0.5325
红色比: 51.4 % 绿色比: 39.4 % 蓝色比: 9.3 % 光通量红色比: 25.1 % 光通量绿色比: 73.7 % 光通量蓝色比: 1.3 %

显色指数: 91.3 AvgR: 87.9
R1: 90.7 R2: 94.2 R3: 97.6 R4: 92.4 R5: 90.4 R6: 94.1 R7: 92.3 R8: 78.8
R9: 51.3 R10: 86.5 R11: 93.6 R12: 82.0 R13: 91.4 R14: 97.8 R15: 85.3


色温: 2718 K 光通量: 1189.823 lm 峰值波长: 619.6 nm 色容差: 1.2
明暗视觉比: 1.2 中心波长: 606.5 nm 主波长: 583.0 nm 质心波长: 602.2 nm
半宽度: 150.3 nm 色偏差: 0.00382 色纯度: 66.3 % 色质指数: 89.3
LER(TM-30): 287.8 辐射功率: 4134.0 mw 色域指数(Rg): 96.6 逼真度(Rf): 91.8
红光辐射功率: 1973.0 mw 近红辐射功率: 280.0 mw 远红辐射功率: 15.3 mw

电参数:





光效: 28.4 Lm/W 能效: 30.9 能效等级: G
电压: 220.7 V 电流: 0.329 A 功率: 41.880 W 功率因素: 0.577

产品型号: 制造厂商:
产品编号: 测试单位:
测试人员: 测试日期:10/12/23
备注:


Rf: 91.8 CCT: 2718K u': 0.2606
Rg: 96.6 LER: 287.8 Duv: 0.00382 v': 0.5325

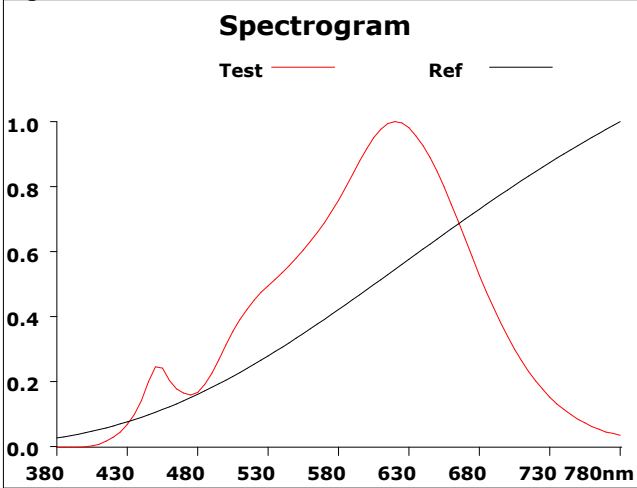


500			
Hue Bin	Rf	Chroma	Hue
1	88.5	-5.7%	-0.3%
2	90.9	-4.2%	1.9%
3	90.8	-2.8%	3.3%
4	94.7	-2.4%	1.4%
5	95.5	-1.5%	2.5%
6	96.5	-0.4%	1.4%
7	94.7	-2.7%	-1.4%
8	96.6	-1.2%	1.3%
9	94.0	-2.6%	1.8%
10	91.3	-1.8%	4.6%
11	90.8	-0.1%	6.0%
12	90.6	3.2%	-0.3%
13	91.3	1.6%	-5.6%
14	87.9	1.8%	-8.6%
15	91.1	-2.3%	-4.0%
16	85.7	-4.5%	-8.6%

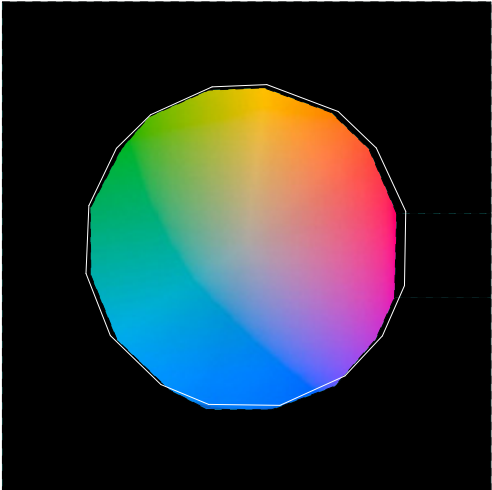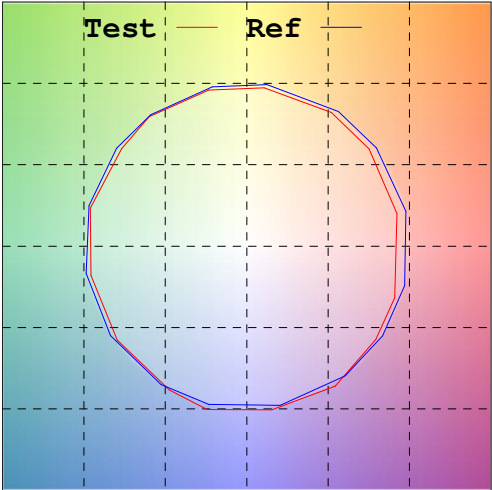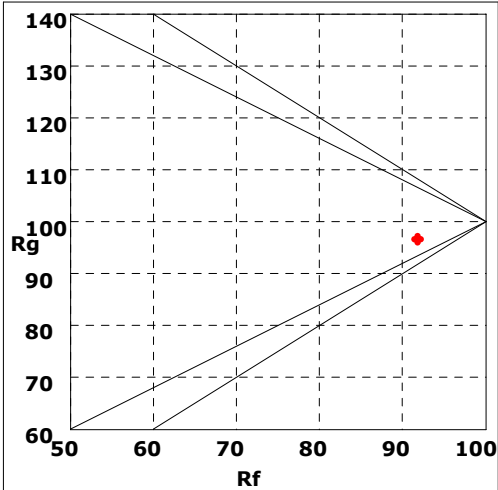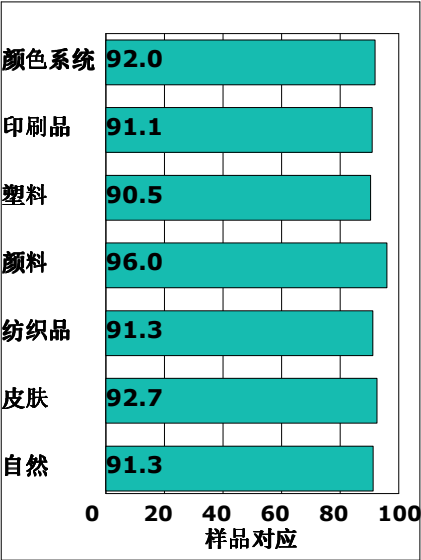

Rf by Bue



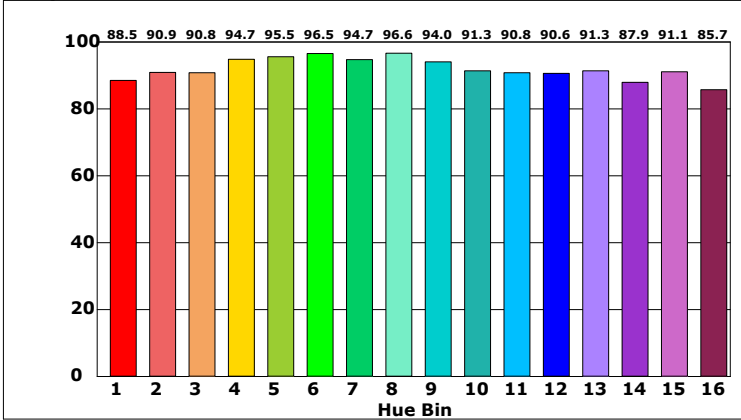


Chroma by Bue

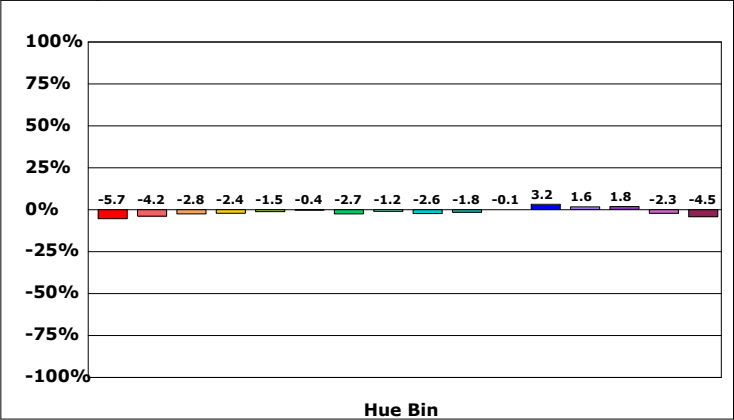

产品型号:
产品编号:
测试人员:
备注:


制造厂商:
测试单位:
测试日期:10/12/23

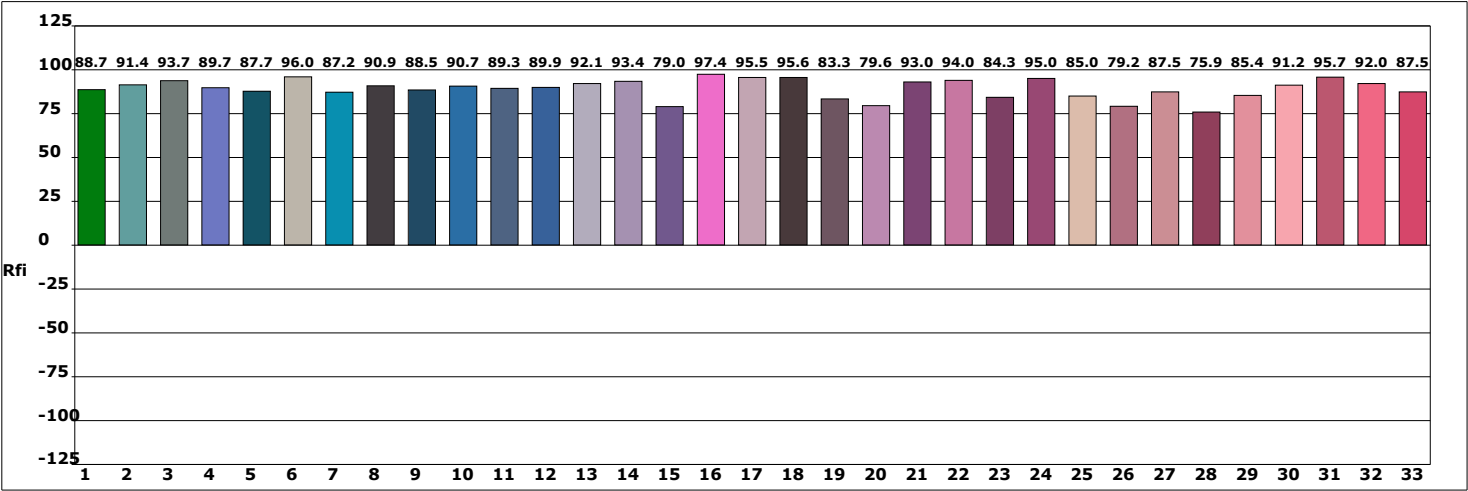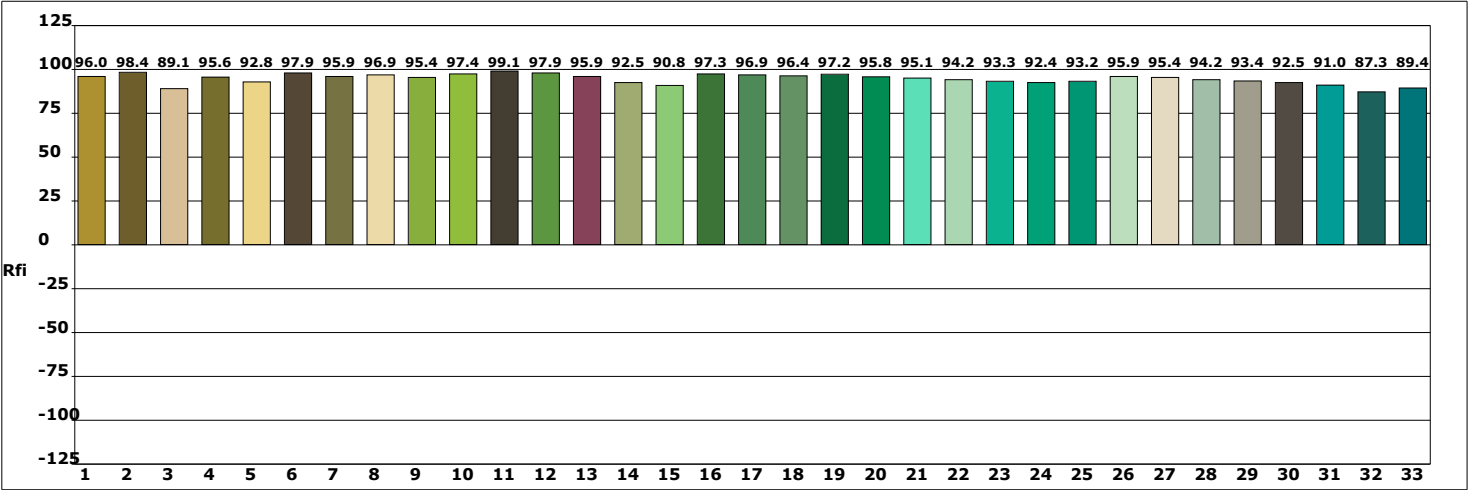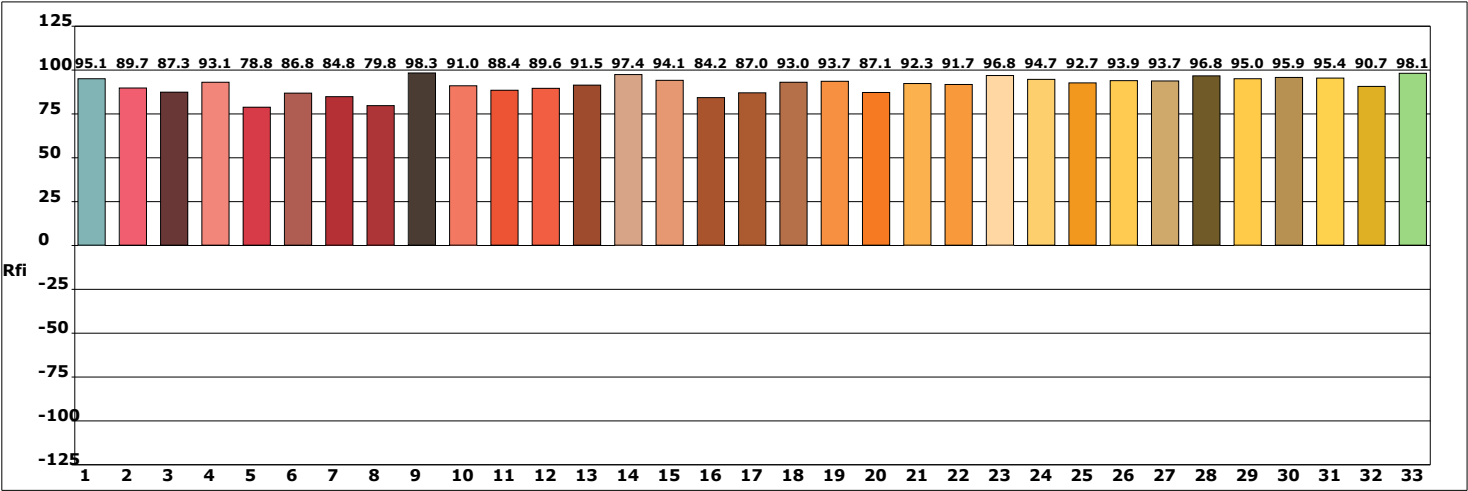


产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

光谱图

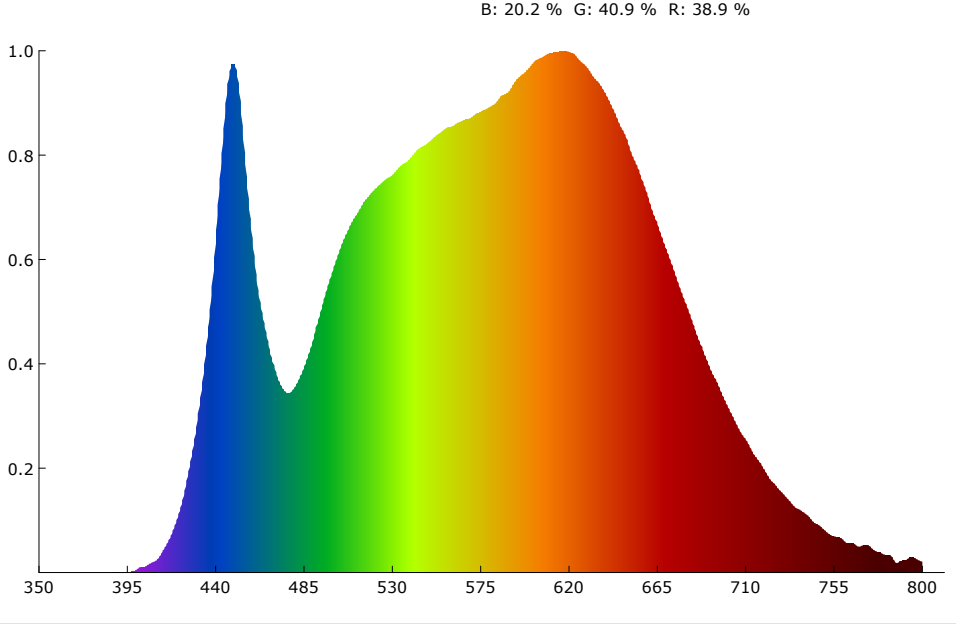

SDCM

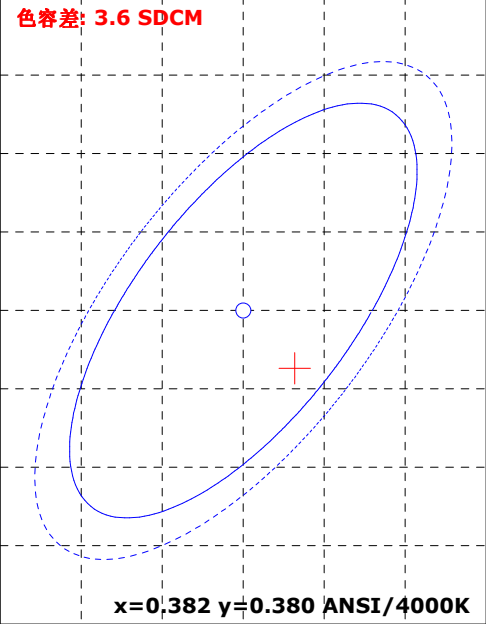

颜色参数:

坐标x: 0.3850

坐标y: 0.3760

坐标u: 0.2284

坐标v: 0.3346

坐标u': 0.2284

坐标v': 0.5019

红色比: 38.9 %

绿色比: 40.9 %

蓝色比: 20.2 %

光通量红色比: 19.7 %

光通量绿色比: 77.8 %

光通量蓝色比: 2.5 %

显色指数: 93.5

AvgR: 90.9

R1: 94.5

R2: 95.1

R3: 94.3

R4: 94.1

R5: 94.0

R6: 93.0

R7: 94.7

R8: 88.5

R9: 70.0

R10: 87.7

R11: 94.3

R12: 79.7

R13: 94.6

R14: 96.4

R15: 92.7

色温: 3872 K

光通量: 1212.609 lm

峰值波长: 618.6 nm

色容差: 3.6

明暗视觉比: 1.7

中心波长: 587.1 nm

主波长: 580.4 nm

质心波长: 577.4 nm

半宽度: 186.5 nm

色偏差: -0.00166

色纯度: 28.4 %

色质指数: 87.4

LER(TM-30): 287.0

辐射功率: 4224.9 mw

色域指数(Rg): 101.2

逼真度(Rf): 91.1

红光辐射功率: 1555.3 mw

近红辐射功率: 217.0 mw

远红辐射功率: 11.5 mw

电参数:

光效: 33.2 Lm/W

能效: 36.2

能效等级: G

电压: 220.8 V

电流: 0.289 A

功率: 36.520 W

功率因素: 0.571

产品型号:

产品编号:

测试人员:


备注:

制造厂商:







测试单位:

测试日期:10/12/23

Rf: 91.1 CCT: 3872K u': 0.2284
Rg: 101.2 LER: 287.0 Duv: -0.00166 v': 0.5019



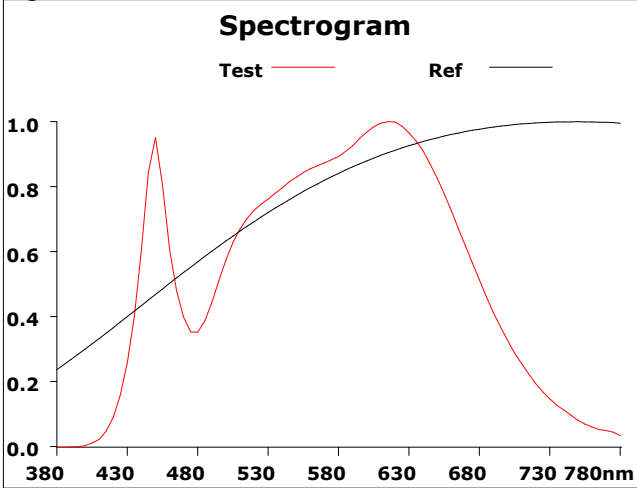


500			
Hue Bin	Rf	Chroma	Hue
1	92.0	-3.8%	-1.0%
2	93.7	-2.5%	2.0%
3	88.3	-1.1%	5.4%
4	92.1	0.5%	4.1%
5	91.9	1.6%	3.0%
6	94.1	3.5%	0.1%
7	96.3	0.5%	-1.8%
8	95.2	-1.1%	-1.0%
9	94.2	-2.3%	1.7%
10	89.1	-3.2%	4.8%
11	85.0	1.4%	9.1%
12	86.8	4.3%	5.0%
13	92.5	3.9%	-1.1%
14	89.4	8.7%	-3.6%
15	90.1	2.1%	-5.9%
16	87.5	0.2%	-7.3%

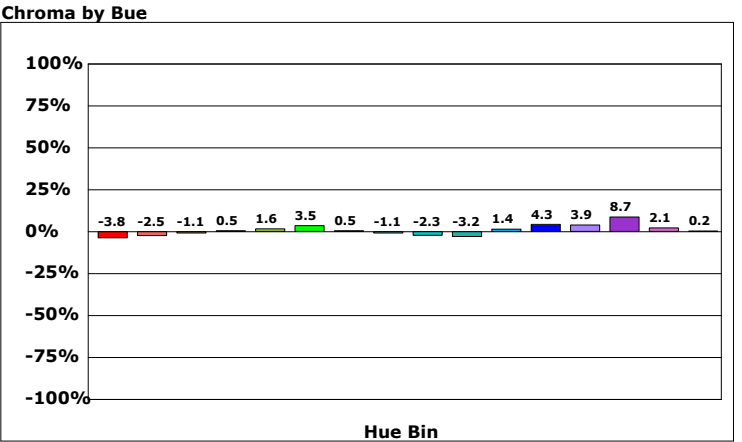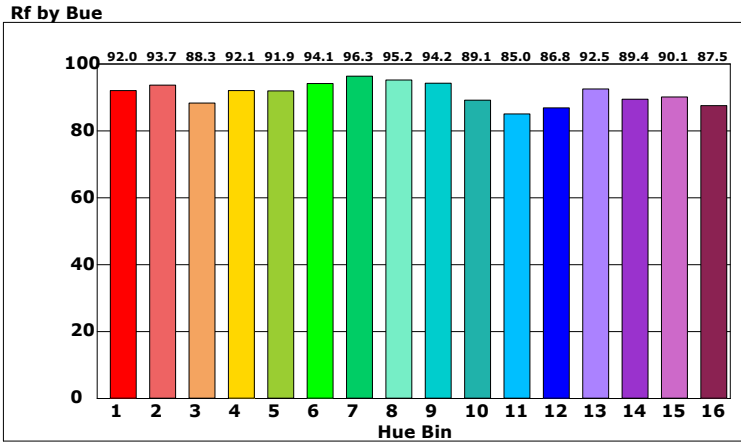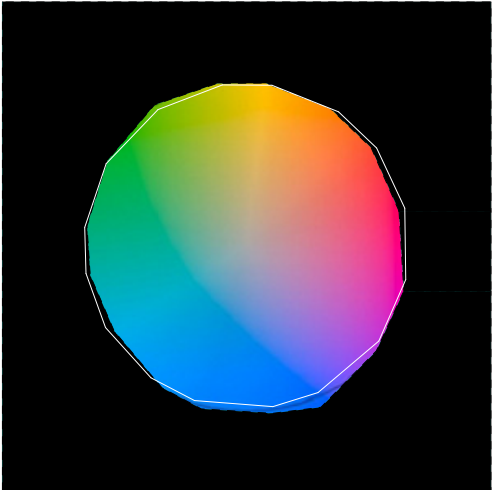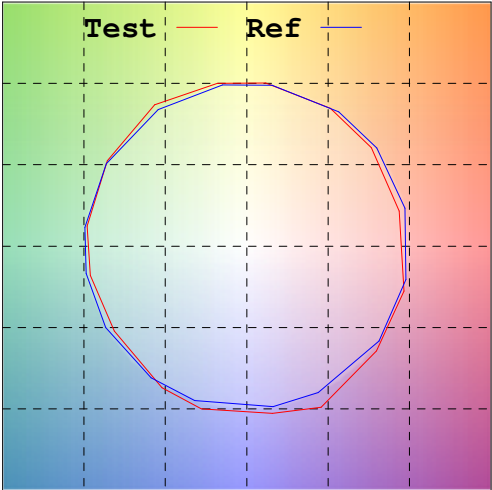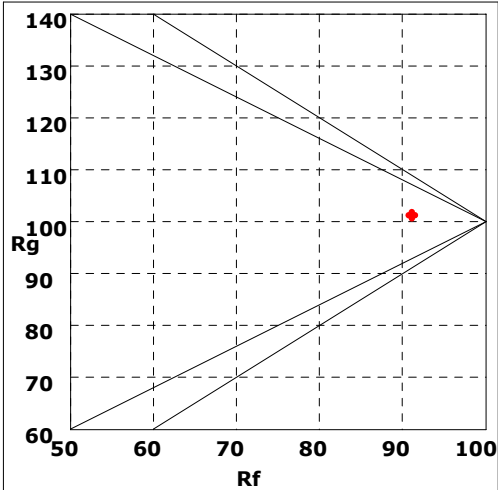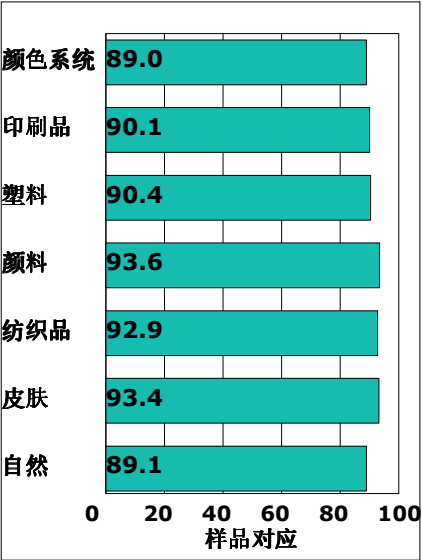

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23

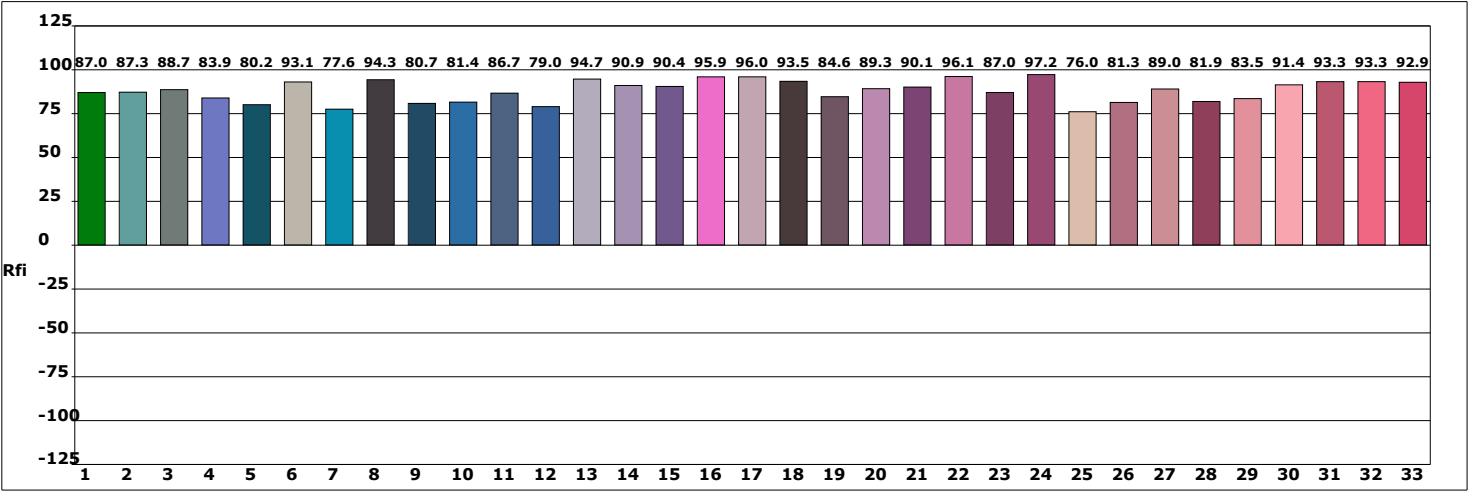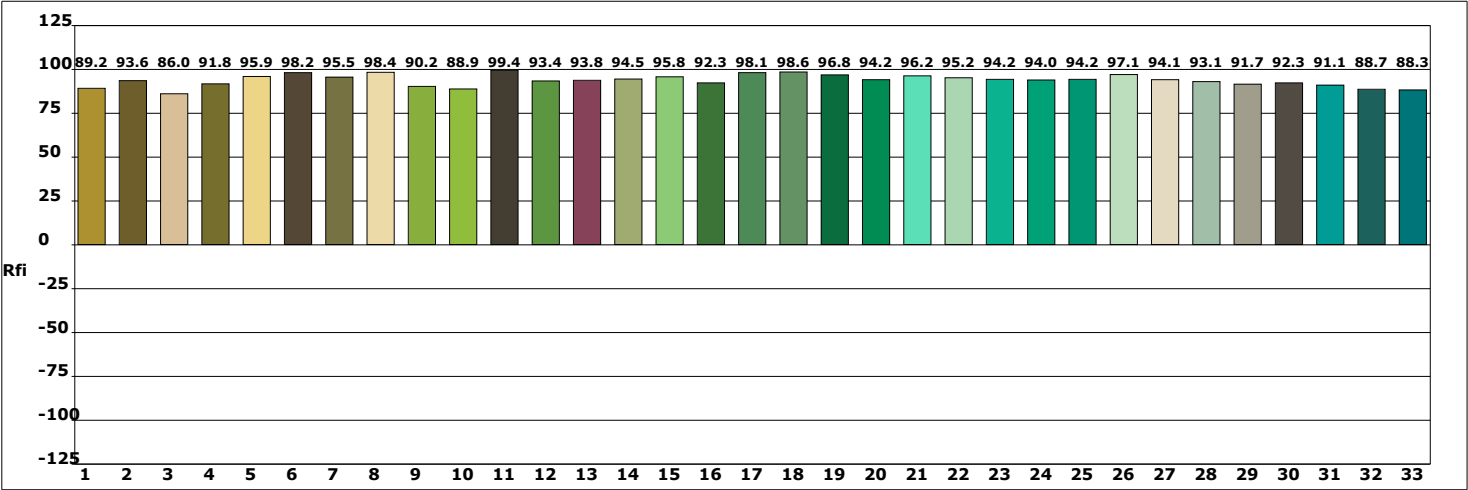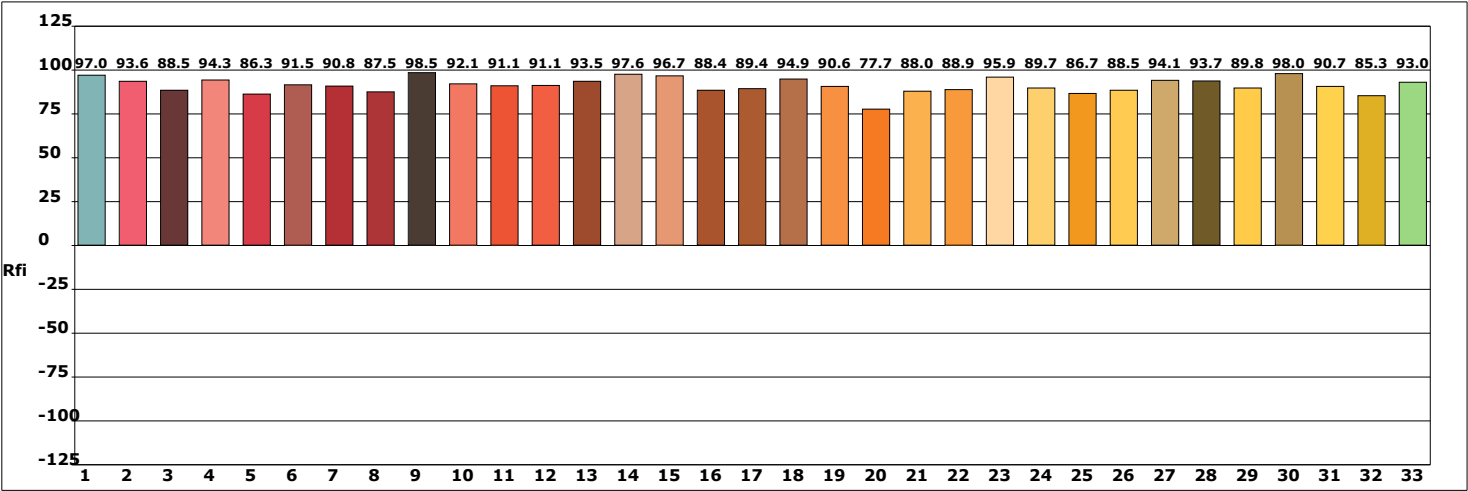

产品型号:
产品编号:
测试人员:
备注:

制造厂商:
测试单位:
测试日期:10/12/23