

SPECIFICATION

Product name: LDS-100W-180X

Release date: 2025/06/20

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LDS-100W-180X Series	REV	V1.0

Features

- Class I type for insulation
- Input voltage range: 90-305V ~ 50/60Hz
- Efficiency 92% (Typ.)
- Constant current output ,with power limitation for control mode
- Metal material case, protection grade against water and dust: IP42
- Surge level:
 - differential mode : 4kV
 - common mode : 6kV
- Function available:
 - Output current is dimmed by external potentiometer (Only Type A)
 - Output current is dimmed by Isolated 3 in 1 dimmer (Only Type P)
 - Output current is dimmed by light intensity (Only Type L)
- guaranteed Lifetime : 5 years

Applications

Street lighting、Industrial lighting、Stadium lighting
Floodlight lighting、Landscape lighting 、Plant lighting

Model list

Model NO.	Rated Input voltage	Max Output power	Output voltage	Output current range	The default current	Eff.
LDS-100W-180A LDS-100W-180P LDS-100W-180L	120-277V 50/60Hz (Drop power is used with input less than 120 Vac)	100W	90-180Vdc Rated Power (100-180V)	0.45-1.0A	0.67A	≥92%

Note:

1. Test conditions: Ta=25°C, under 230Vac input, after running for 30 minutes with full load .
2. When the input is less than 80±5Vac, the drive enters undervoltage protection; input 100-120 Vac, rated power 80W; input 120-277 Vac, rated power 100W, pay attention when applied; Please refer to the input voltage VS output power curve diagram for details.
3. When the input voltage is 100-120 Vac, it is recommended to adjust the potentiometer to reduce the power by 20%

SUNCOM	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LDS-100W-180X Series	REV	V1.0

Input characteristics

Parameter	Min	Typ.	Max	Remark
Rated input voltage	120Vac	230Vac	277Vac	-
Input voltage range	90Vac	-	305Vac	-
Rated frequency range	47Hz	50/60Hz	63Hz	-
Power factor	0.95	-	-	@230Vac input ,with full load
Power factor	0.9	-	-	@200-277Vac input ,with 70%-100%
T.H.D.	-	-	10%	@230Vac input ,with full load
T.H.D.	-	-	20%	@200-277Vac input ,with 70%-100%
Input current	-	-	1.2A	@200Vac input ,with full load
Inrush current	-	-	100A	230Vac, cold start (25°C)

Output characteristics

Parameter	Min	Typ.	Max	Remark
Rated current	-	0.67A	-	Rated Load :120VDC
Output current range	0.45A		1A	-
Output voltage range	90V		180V	Constant power output range:100-150VDC
Available power(100-120Vac)	-	80W	-	When the input voltage is less than 120Vac, the derating is 20%
Rated power(120-277Vac)	-	100W	-	
No-load voltage			250V	

SUNCOM	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LDS-100W-180X Series	REV	V1.0

Output characteristics

Parameter	Min	Typ.	Max	Remark
Efficiency@230Vac	-	92%	-	@230Vac input ,with full load
Accuracy of output current	-5%	-	+5%	For constant-power range , with full load
Output current ripple (PK-AV)	-	5%	10%	full load , 20 MHz BW
Line regulation	-5%	-	+5%	full load
Load regulation	-5%	-	+5%	@full load,100-140Vdc @full load,140-180Vdc
Starting time	-	-	500ms	Full load@230Vac

Note: 1.The output current is limited by the input and output voltage, please refer to “I-V WORKING AREA” for details;

Dimming characteristics

Dimming function		Min	Typ.	Max	Instructions
0-10V Dimming (Optional)	Safe operation voltage range	1V	-	12V	Beyond the range may lead to a failure of the driver.
	Dimming output range	10%	-	100%	-
	Rated operation voltage range	1V	-	10V	-
PWM Dimming (Optional)	PWM high level	9.5V	-	10.5V	-
	PWM low level	0V	-	0.3V	-
	Rated dimming frequency	300Hz	-	2000Hz	-
	PWM duty cycle	10%	-	99%	full power output at 99%duty cycle
Resistor Dimming (Optional)	Rated external resistance value	10KΩ	-	100KΩ	-
	Dimming output range	10%	-	100%	-

Note:

1.Output current of dimming port: 100uA (typical value).

2.The maximum operation voltage for the dimming port is 12V. Wrong voltage beyond the range or a reverse connection may lead to a critical failure of the driver.

SUNCOM	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LDS-100W-180X Series	REV	V1.0

Protections

Protection	description
under-voltage protection	When the input voltage is less than 80 ± 5 Vac, the output enters the off mode. See the ating curve for details
Output overload protection	Protection mode:hiccup mode,and recovers automatically when the fault condition is removed.
Output short circuit protection	Hiccup mode,and recovery automatically when the fault condition is removed.
Over temperature protection	Could recover automatically; when the temperature of the case is greater than 90°C, the output power decreases to a half.
Output over-voltage protection	Protection mode:Hiccup or clamp at a certain output highest voltage state, the product will not be damaged, when the fault is removed, the driver works normally

Note:

1. Unless otherwise specified, all parameters should be measured at the condition of 230Vac (50Hz) input ,with rated load ,and ambient temperature of 25°C;
2. Including setting error, linear adjustment rate and load adjustment rate;

Environmental characteristics

Environmental categories	Parameter
Working temperature	-40 ~ +55°C@100-277Vac((Refer to "Service Life Curve"))
Safety case temperature	-40 ~ 90°C
Working humidity	20 ~ 95% RH,non-condensing
Storage temperature、humidity	-40~+80°C, 10 ~ 95% RH
Resistant to vibration	10 ~ 500Hz, 5G 12 min/cycle, X, Y, Z axis 72 min each
MTBF	230Khrs min. MIL-HDBK-217F (Ta=25°C)
Lifetime	50000 hours @230Vac,80% load, Tcase=75°C,.Refer to" Tcase VS Lifetime" curve for details.

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LDS-100W-180X Series	REV	V1.0

Safety and EMC


Safety categories	Standard
Safety	GB19510.1、GB19510.14、EN61347-1、EN61347-2-13、IEC61347-1、IEC61347-2-13、AS/NZS61347.1、AS61347.2.13、EN 62384;
EMC	EN 55015、EN 61547、EN 61000-3-2、GB/T 17743、GB17625.1、EN 61000-3-3
Surge level	Differential mode L-N $\pm 4\text{KV}(2\Omega)$, common mode L, N-PE $\pm 6\text{KV}(12\Omega)$ Refer to IEC61000-4-5 2014
High-pot test	I/P-PE :1.5KVac I/P-DIM:3.75KVac
Insulation impedance	I/P-PE :10M Ω / 500VDC / 25 $^{\circ}\text{C}$ / 70% RH
Leakage current	<0.7mA@277Vac

Note:



1. **Attention! As a component of the whole, the EMC performance of the final product is not only decided by the driver, even if the driver is well-designed and fulfil all the required compliance. The final equipment manufacturers must re-qualify EMC Directive on the complete product.**

I-V Working area




LDS-100W-180A/P/L (Import:120~277Vac) output voltage VS output current

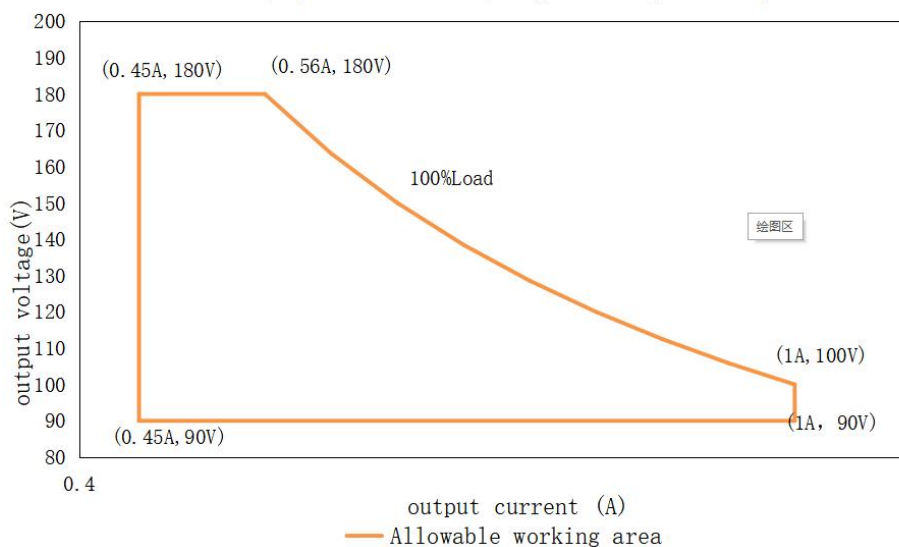


Load	Output									
Load working Voltage	90V	100V	110V	120V	130V	140V	150V	160V	170V	180V
Io_MAX	1A	1A	0.91A	0.83A	0.77A	0.71A	0.67A	0.63A	0.59A	0.56A
Po_MAX	90W	100W	100W	100W	100W	100W	100W	100W	100W	100W

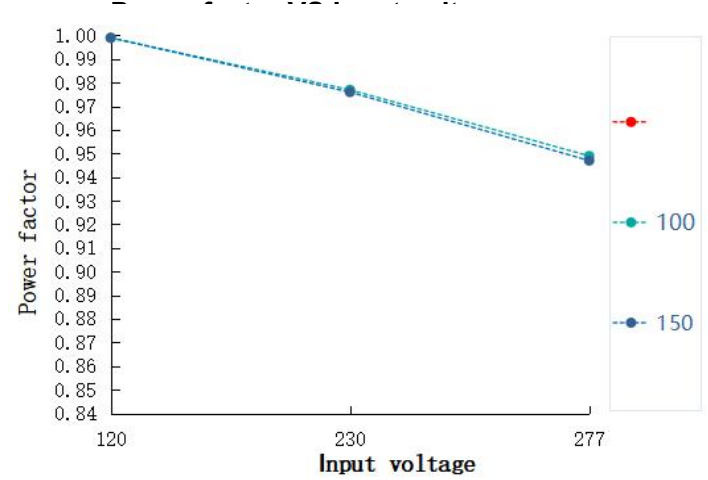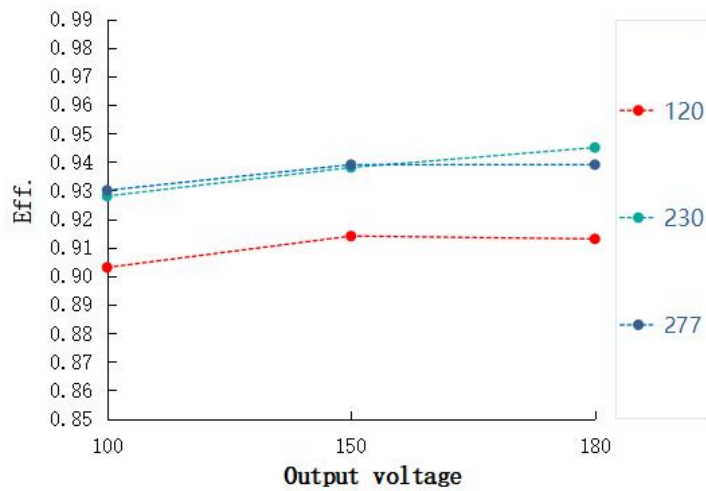

T.H.D. VS Output voltage

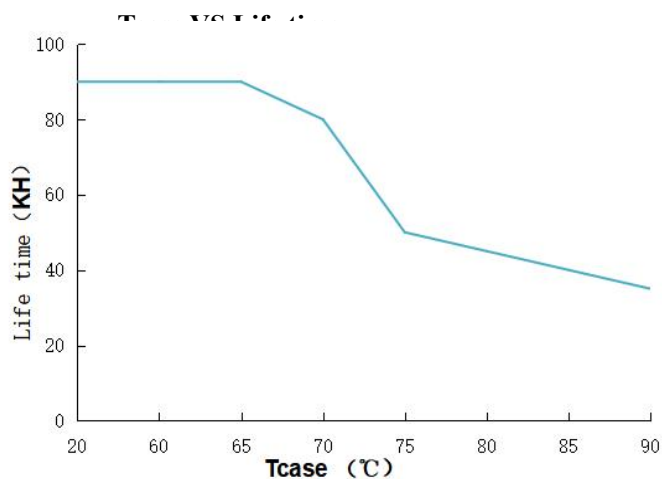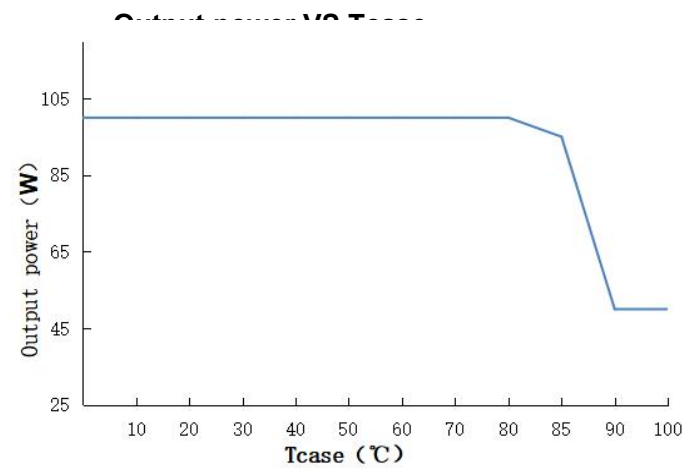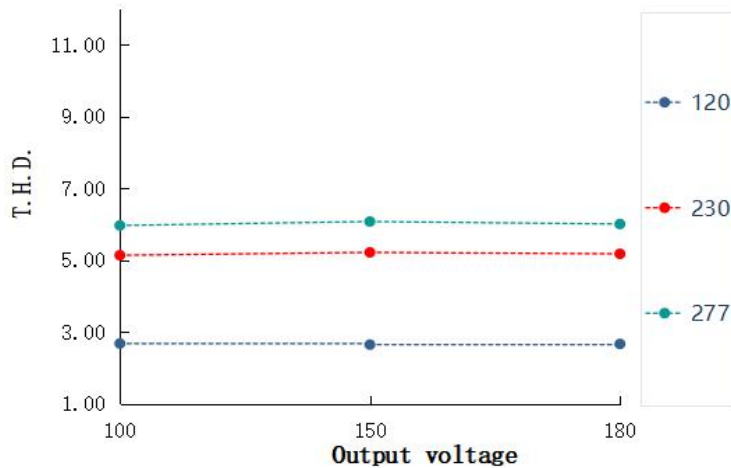

Output power VS Input voltage

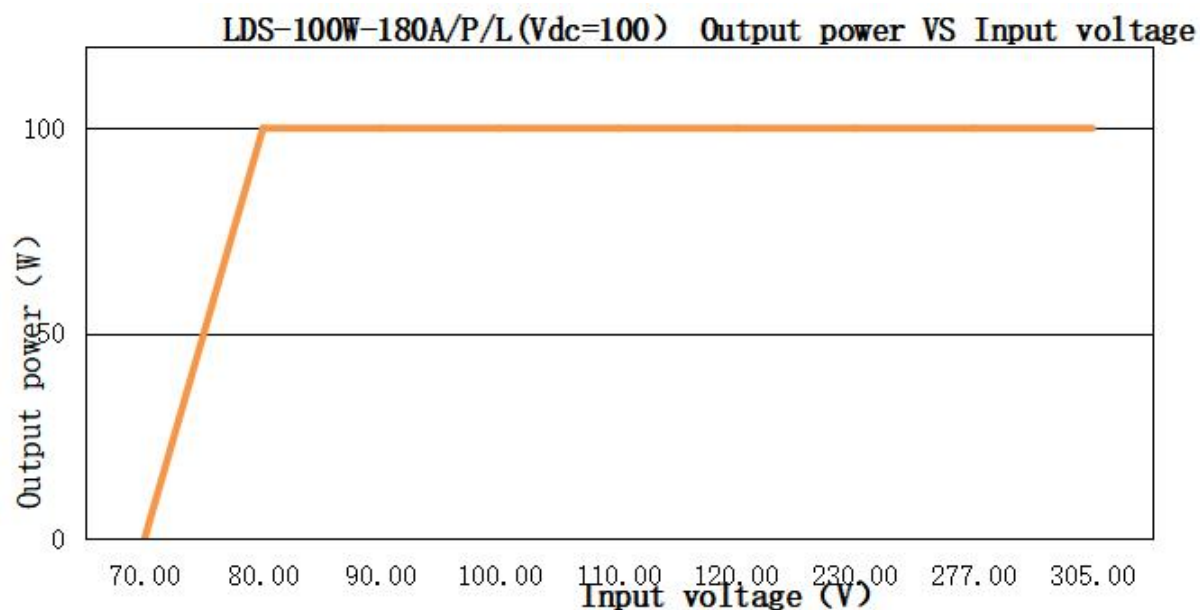

The rated output current & power under different input voltage

Input Voltage	90Vac	100Vac	120Vac	150Vac	180Vac	200Vac	230Vac	277Vac
I _o	1A	1A	1A	1A	1A	1A	1A	1A
P _o	100W	100W	100W	100W	100W	100W	100W	100W

Note:

- When the input voltage is below 120±5Vac, the output power should be manually reduced to 80W±5% (80%)

Light illuminance value standard (LUX)

testing environment	Start illumination value(LUX)	Turn off the illumination value (LUX)
natural light	≤10	≥50

Note:


- This value is the test data in the open air with the optical sensor head facing 90° up. This test value standard is for reference only

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LDS-100W-180X Series	REV	V1.0

Mechanical specification

Size (mm)	L135mm*W55mm*H31mm
Weight (Kg)	0.24KG
Packaging (mm)	

LDS-100W-180X

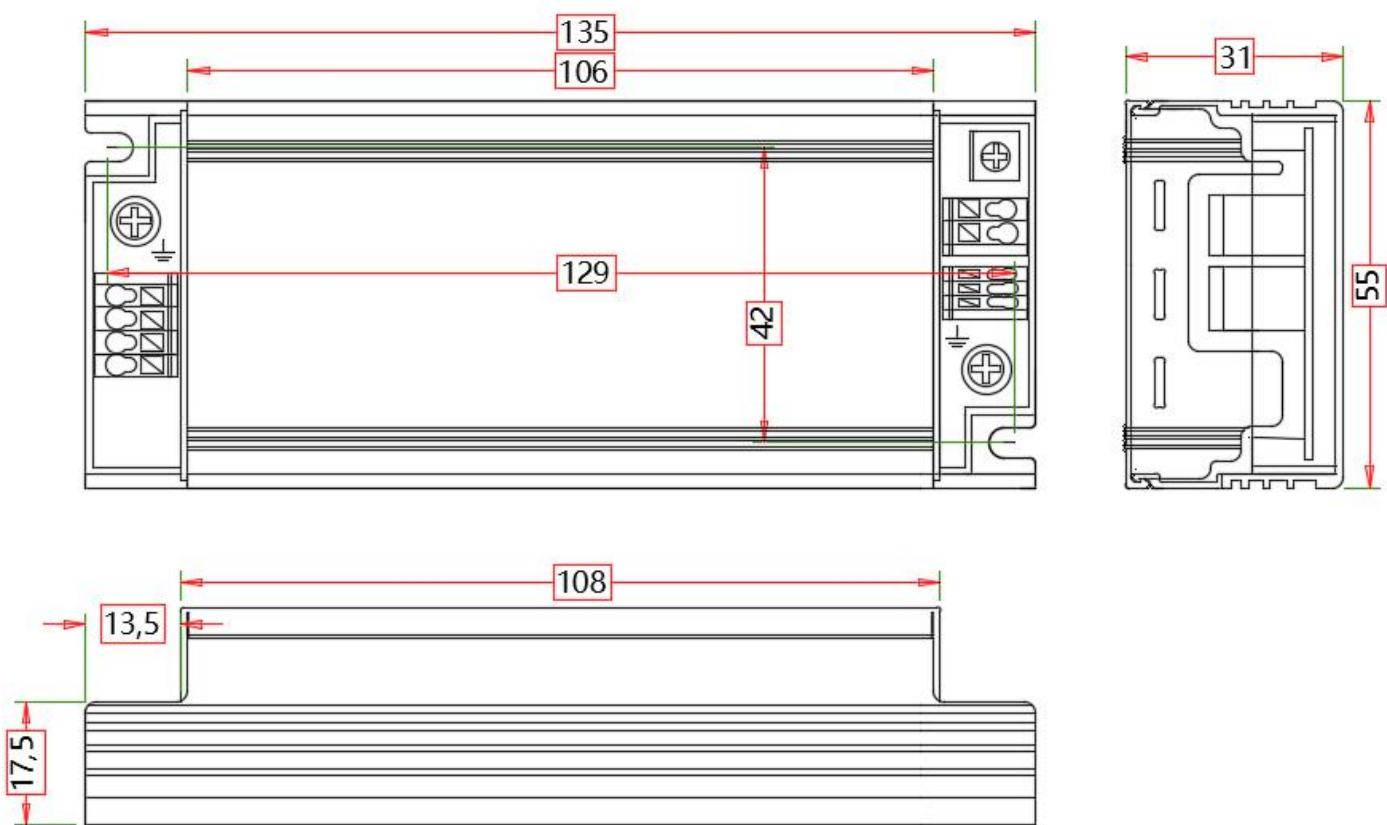

	Product Type	LED INTEGRATED SPECIAL DRIVER		
	Product Series	LDS-100W-180X Series	REV	V1.0

Version

DATE	DESCRIPTION	REV.	CHECK
2025.05.06	Initial version.	V1.0	