



光谱图

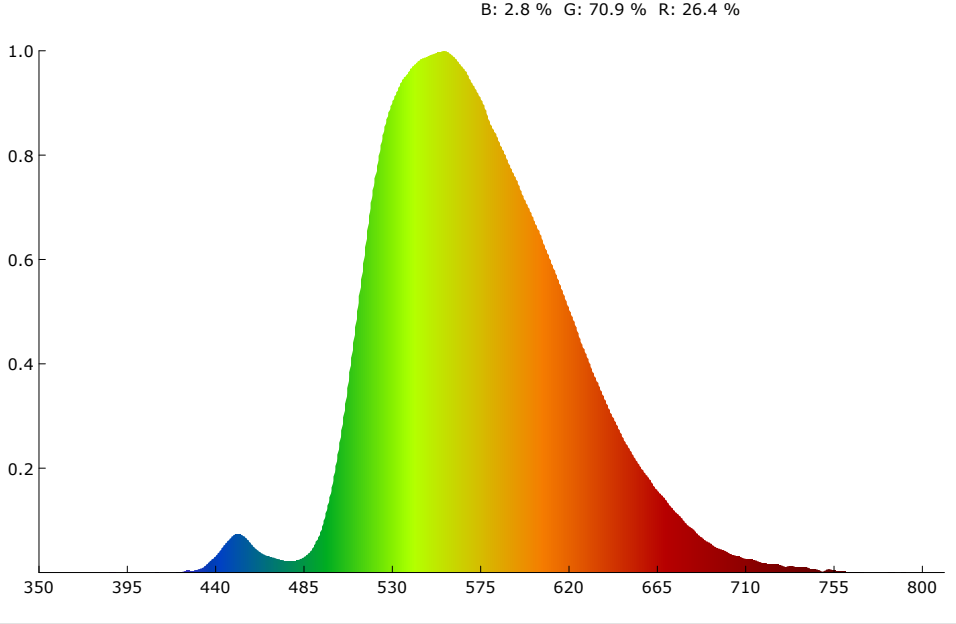

SDCM

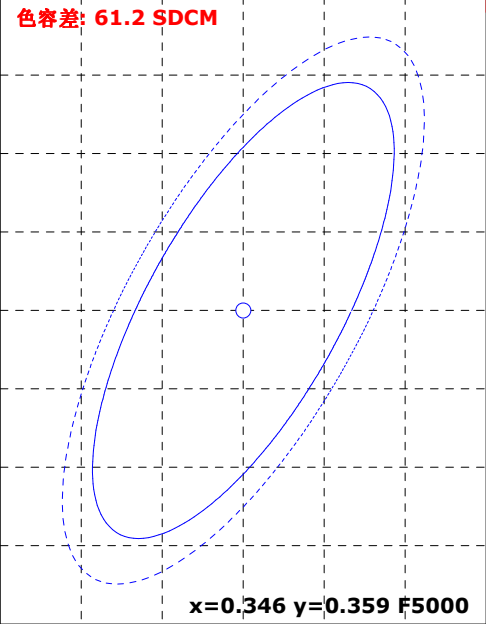

颜色参数:

坐标x: 0.4233 坐标y: 0.5369 坐标u: 0.1970 坐标v: 0.3747 坐标u': 0.1970 坐标v': 0.5620
红色比: 26.4 % 绿色比: 70.9 % 蓝色比: 2.8 % 光通量红色比: 11.4 % 光通量绿色比: 88.4 % 光通量蓝色比: 0.2 %

显色指数: 49.8 AvgR: 32.8
R1: 41.7 R2: 57.3 R3: 71.0 R4: 37.8 R5: 41.1 R6: 47.6 R7: 73.3 R8: 29.2
R9: -99.0 R10: 7.9 R11: 20.9 R12: 5.7 R13: 43.3 R14: 85.7 R15: 28.2


色温: 4001 K 光通量: 1756.287 lm 峰值波长: 556.5 nm 色容差: 61.2
明暗视觉比: 1.2 中心波长: 566.4 nm 主波长: 568.7 nm 质心波长: 573.0 nm
半宽度: 107.4 nm 色偏差: 0.04913 色纯度: 88.4 % 色质指数: 53.6
LER(TM-30): 471.7 辐射功率: 3723.7 mw 色域指数(Rg): 57.2 逼真度(Rf): 51.5
红光辐射功率: 973.1 mw 近红辐射功率: 31.4 mw 远红辐射功率: 0.3 mw

电参数:

光效: 28.7 Lm/W 能效: 31.2 能效等级: G
电压: 220.7 V 电流: 0.456 A 功率: 61.210 W 功率因素: 0.607

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: 51.5 CCT: 4001K u': 0.1970
Rg: 57.2 LER: 471.7 Duv: 0.04913 v': 0.5620

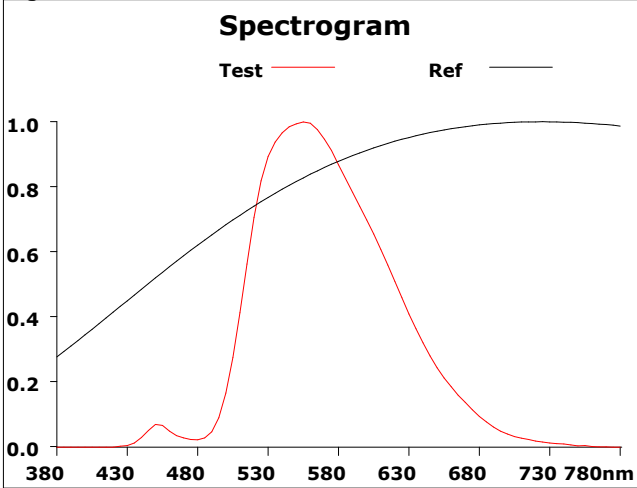

500			
Hue Bin	Rf	Chroma	Hue
1	48.3	-26.2%	-2.5%
2	53.3	-22.2%	-5.4%
3	38.6	-29.1%	-5.6%
4	44.0	-32.5%	-3.1%
5	43.2	-38.3%	4.6%
6	40.1	-36.5%	10.7%
7	39.4	-32.5%	17.7%
8	47.0	-25.6%	14.3%
9	57.1	-22.1%	18.5%
10	45.1	-21.6%	22.6%
11	65.5	-12.8%	15.1%
12	68.0	-12.0%	6.8%
13	70.5	-15.3%	-4.7%
14	72.5	-11.8%	-5.9%
15	59.5	-19.6%	-9.9%
16	55.5	-20.3%	-7.5%

