



光谱图

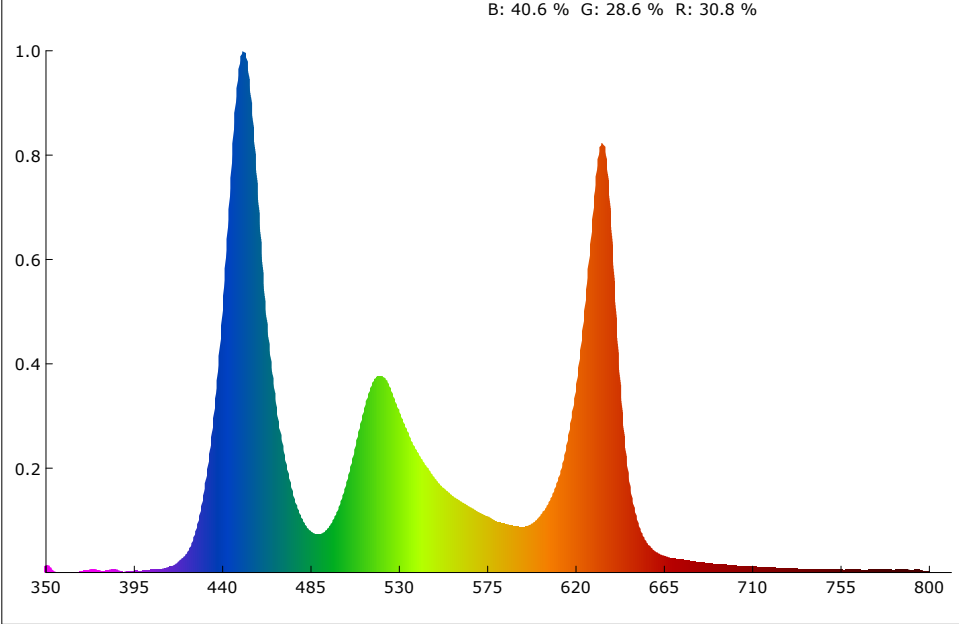

SDCM

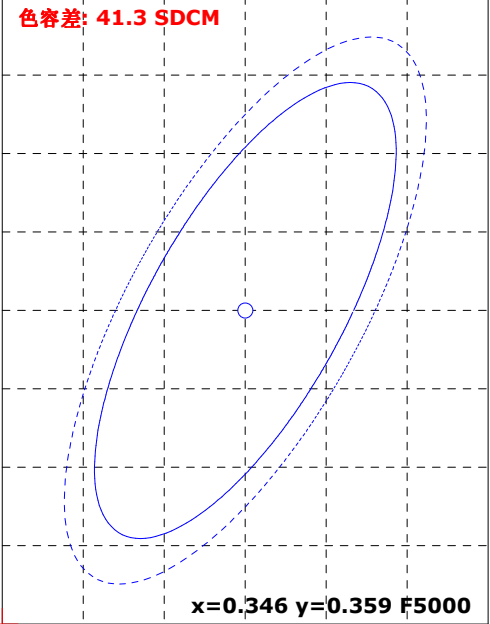

颜色参数:

坐标x: 0.2871 坐标y: 0.2397 坐标u: 0.2166 坐标v: 0.2712 坐标u': 0.2166 坐标v': 0.4068
红色比: 30.8 % 绿色比: 28.6 % 蓝色比: 40.6 % 光通量红色比: 24.4 % 光通量绿色比: 69.6 % 光通量蓝色比: 6.0 %

显色指数: 39.5 AvgR: 28.8
R1: 21.1 R2: 70.6 R3: 52.7 R4: 17.6 R5: 39.3 R6: 71.5 R7: 59.9 R8: -16.3
R9: -99.0 R10: 50.4 R11: -0.1 R12: 68.5 R13: 32.5 R14: 67.4 R15: -4.1


色温: 14772 K 光通量: 2474.885 lm 峰值波长: 450.6 nm 色容差: 41.3
明暗视觉比: 2.9 中心波长: 451.6 nm 主波长: 420.4 nm 质心波长: 535.1 nm
半宽度: 22.2 nm 色偏差: -0.03287 色纯度: 28.5 % 色质指数: 83.9
LER(TM-30): 222.5 辐射功率: 11124.3 mw 色域指数(Rg): 126.7 逼真度(Rf): 60.5
红光辐射功率: 3373.1 mw 近红辐射功率: 109.8 mw 远红辐射功率: 19.6 mw

电参数:





光效: 24.8 Lm/W 能效: 27.0 能效等级: G
电压: 220.8 V 电流: 0.712 A 功率: 99.930 W 功率因素: 0.635

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:


Rf: 60.5 CCT: 14772K u': 0.2166
Rg: 126.7 LER: 222.5 Duv: -0.03287 v': 0.4068

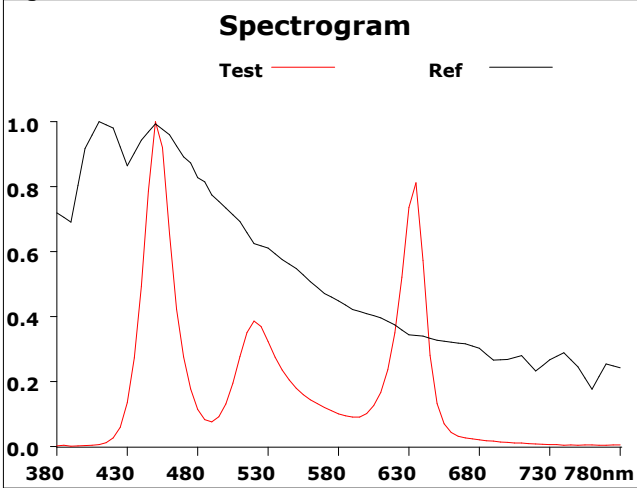

500			
Hue Bin	Rf	Chroma	Hue
1	30.3	35.4%	4.6%
2	51.2	19.6%	-9.0%
3	57.8	15.5%	-17.0%
4	78.3	4.7%	-5.7%
5	78.7	-0.5%	2.3%
6	64.1	12.1%	17.6%
7	59.3	4.7%	9.4%
8	62.6	18.8%	11.6%
9	76.3	11.8%	4.7%
10	82.9	4.4%	10.1%
11	66.6	3.6%	14.1%
12	63.5	-4.2%	28.9%
13	42.3	-1.9%	34.9%
14	28.3	9.2%	43.5%
15	30.5	38.9%	44.2%
16	39.1	24.0%	15.1%

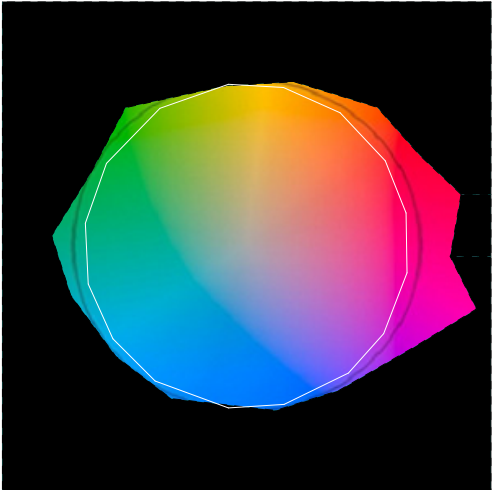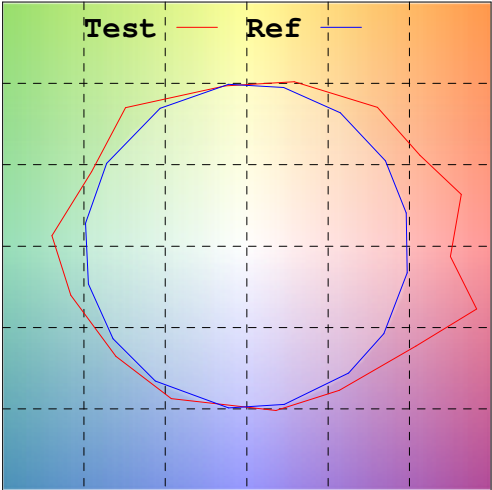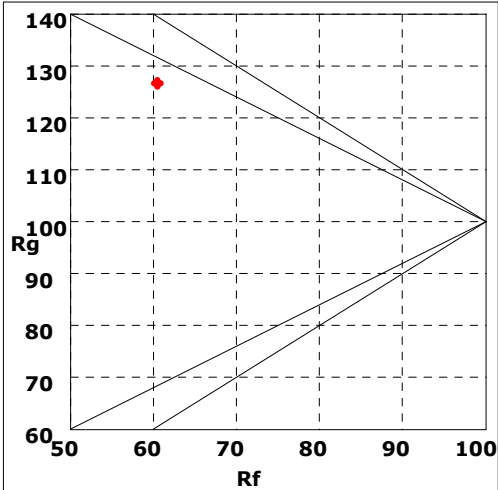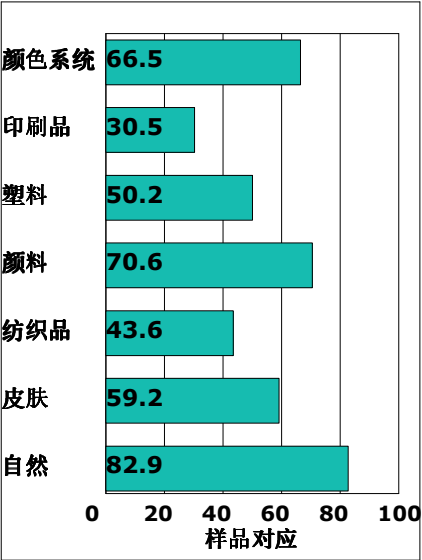

Rf by Bue

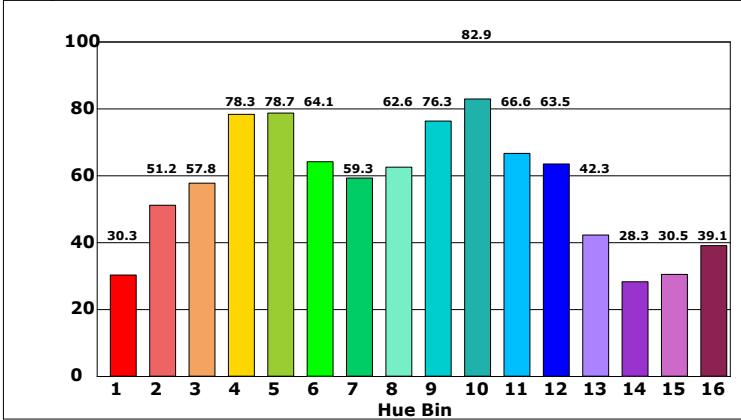

Chroma by Bue

