



光谱图

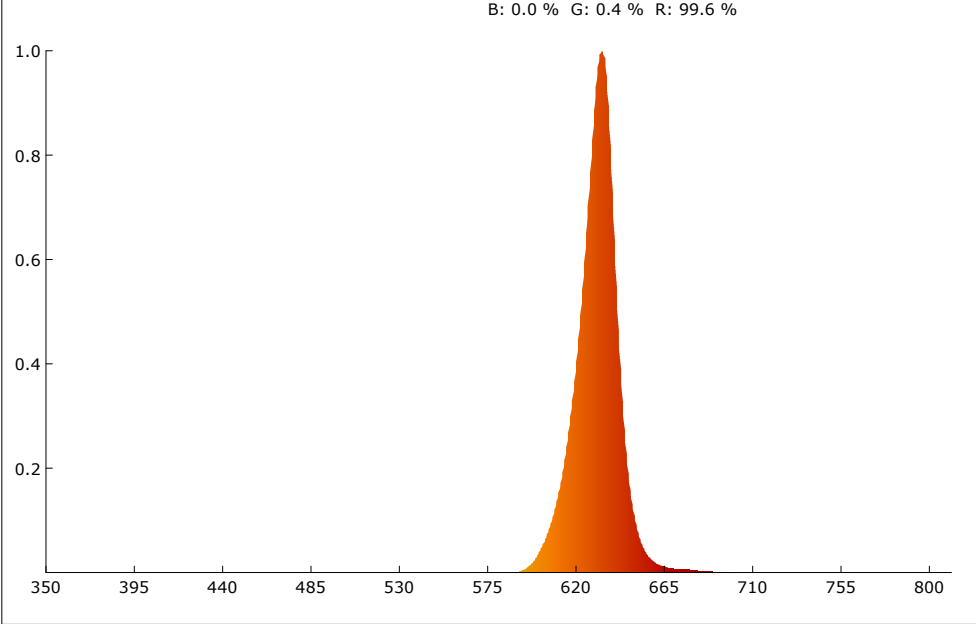

SDCM

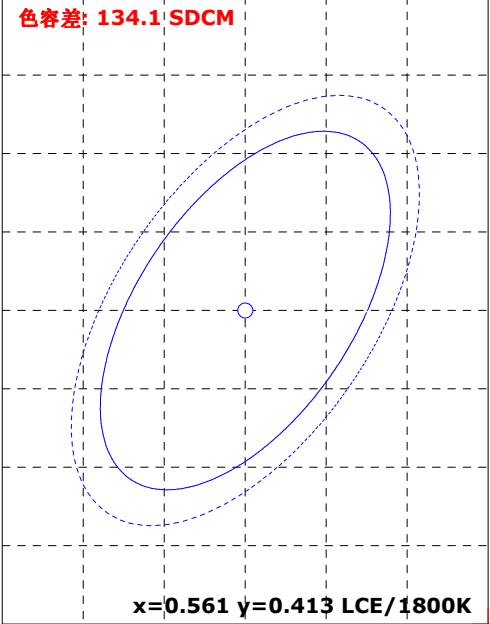

颜色参数:

坐标x: 0.7007 坐标y: 0.2991 坐标u: 0.5403 坐标v: 0.3459 坐标u': 0.5403 坐标v': 0.5188
红色比: 99.6 % 绿色比: 0.4 % 蓝色比: 0.0 % 光通量红色比: 98.7 % 光通量绿色比: 1.3 % 光通量蓝色比: 0.0 %

显色指数: 6.1 AvgR: 6.7
R1: -4.1 R2: 73.9 R3: 26.6 R4: -36.0 R5: -5.8 R6: 89.4 R7: -5.6 R8: -89.1
R9: -99.0 R10: 66.3 R11: -22.0 R12: 79.2 R13: 21.4 R14: 56.4 R15: -50.5


色温: 1000 K 光通量: 988.504 lm 峰值波长: 633.5 nm 色容差: 134.1
明暗视觉比: 0.0 中心波长: 632.3 nm 主波长: 625.1 nm 质心波长: 631.4 nm
半宽度: 18.3 nm 色偏差: 0.00713 色纯度: 100.0 % 色质指数: -nan(ind)
LER(TM-30): 180.5 辐射功率: 5475.4 mw 色域指数(Rg): 0.5 逼真度(Rf): 2.7
红光辐射功率: 5453.7 mw 近红辐射功率: 0.0 mw 远红辐射功率: 0.0 mw

电参数:






光效: 16.4 Lm/W 能效: 17.8 能效等级: G
电压: 220.8 V 电流: 0.450 A 功率: 60.310 W 功率因素: 0.607

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: 2.7 CCT: 1000K u': 0.5403
Rg: 0.5 LER: 180.5 Duv: 0.00713 v': 0.5188

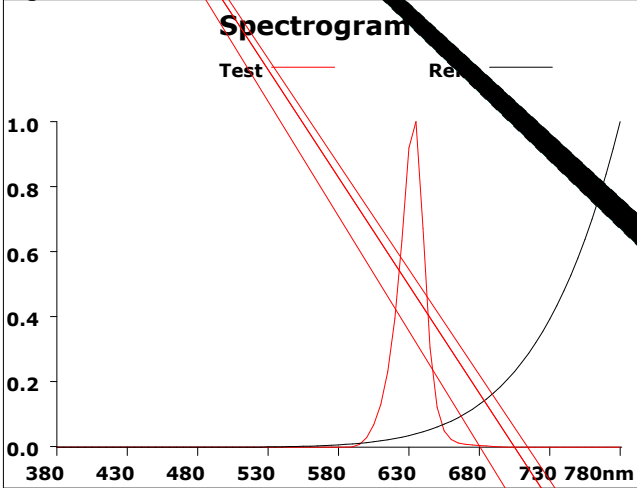

500			
Hue Bin	Rf	Chroma	Hue
1	1.5	-83.0%	5.9%
2	43.6	-90.0%	-4.8%
3	66.0	-100.0%	4.1%
4	100.0	nan%	-nan(ind)%
5	75.0	-91.3%	14.8%
6	100.0	nan%	-nan(ind)%
7	52.6	-52.7%	21.6%
8	0.4	-76.1%	-4.1%
9	0.0	-86.0%	1.5%
10	1.2	-101.3%	4.5%
11	39.6	-98.4%	7.7%
12	32.9	-97.7%	-78.1%
13	4.3	-114.0%	-27.4%
14	1.7	-95.7%	8.5%
15	48.6	-71.6%	1.3%
16	0.9	-100.0%	-8.4%

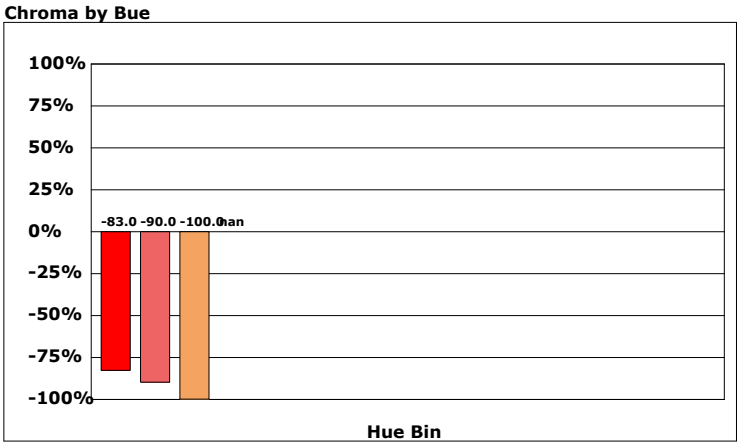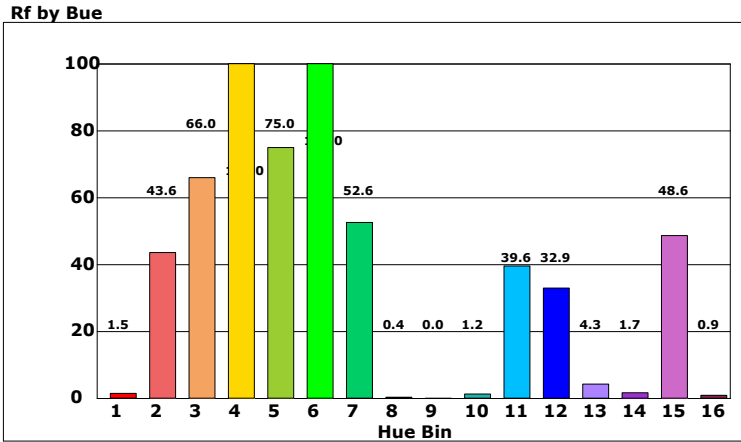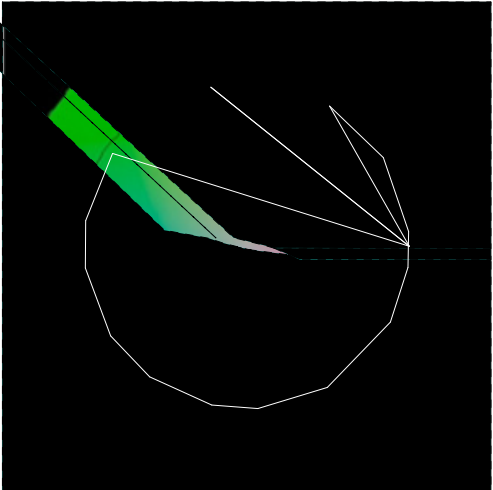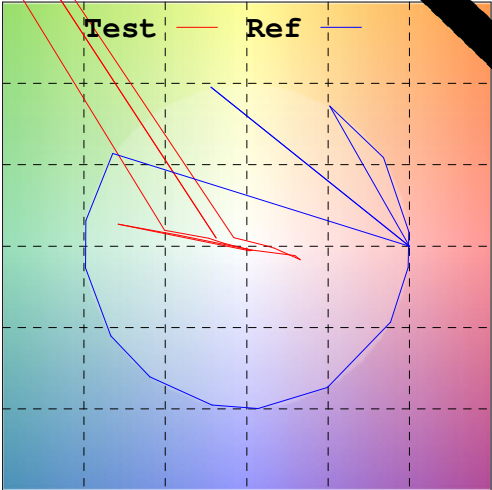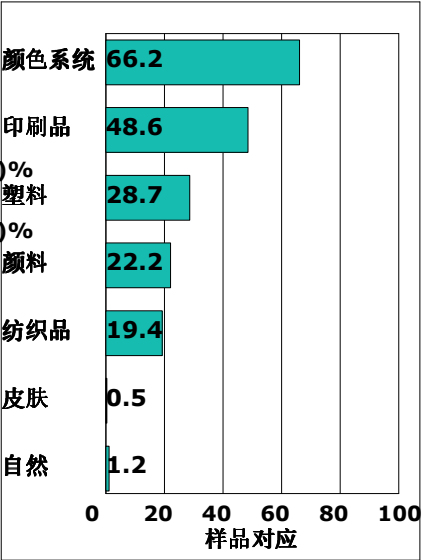

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173