


光谱图

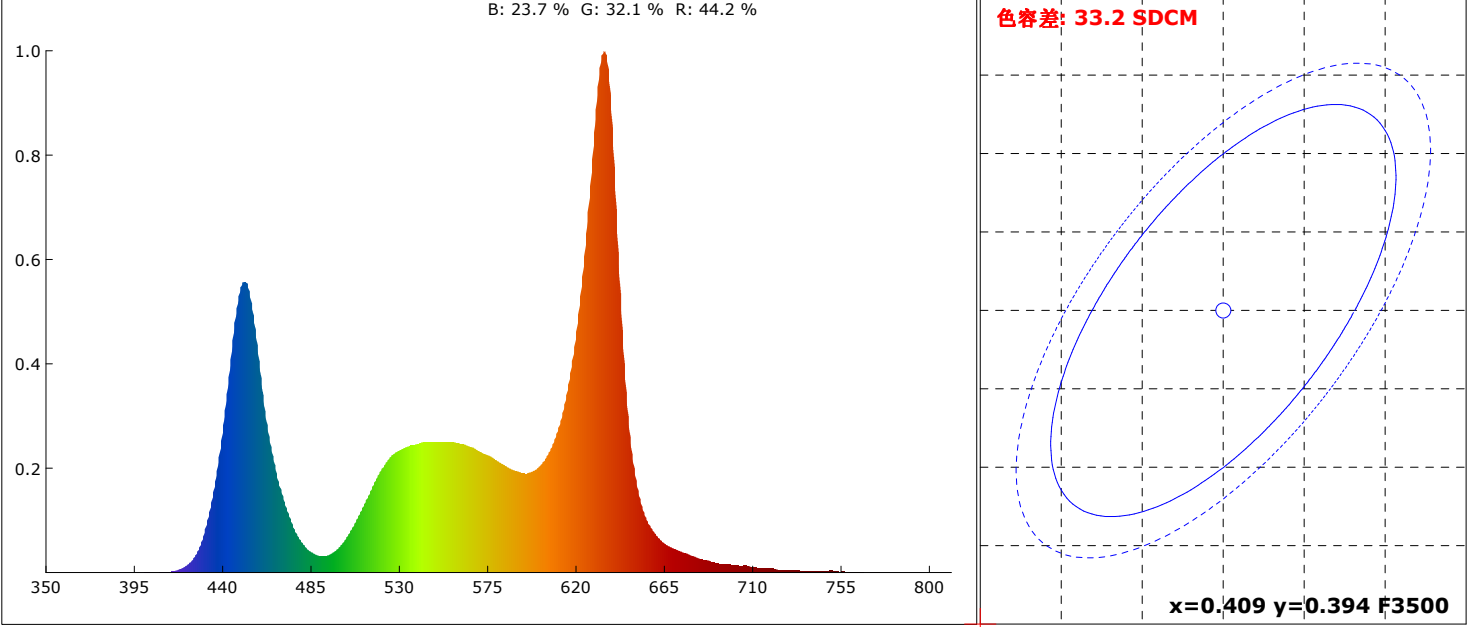

颜色参数:

坐标x: 0.3884 坐标y: 0.3140 坐标u: 0.2593 坐标v: 0.3145 坐标u': 0.2593 坐标v': 0.4718
红色比: 44.2 % 绿色比: 32.1 % 蓝色比: 23.7 % 光通量红色比: 28.5 % 光通量绿色比: 68.5 % 光通量蓝色比: 2.9 %

显色指数: 75.9 AvgR: 69.9
R1: 70.2 R2: 84.9 R3: 79.1 R4: 75.6 R5: 75.1 R6: 82.4 R7: 87.4 R8: 52.6
R9: -3.0 R10: 83.0 R11: 74.4 R12: 75.1 R13: 72.4 R14: 83.2 R15: 55.4


色温: 3131 K 光通量: 2071.957 lm 峰值波长: 634.5 nm 色容差: 33.2
明暗视觉比: 1.6 中心波长: 632.7 nm 主波长: 0.0 nm 质心波长: 565.8 nm
半宽度: 21.1 nm 色偏差: -0.03397 色纯度: 0.0 % 色质指数: 62.3
LER(TM-30): 276.2 辐射功率: 7502.7 mw 色域指数(Rg): 121.4 逼真度(Rf): 75.9
红光辐射功率: 3291.6 mw 近红辐射功率: 47.3 mw 远红辐射功率: 0.0 mw

电参数:







光效: 24.7 Lm/W 能效: 26.8 能效等级: G
电压: 220.8 V 电流: 0.605 A 功率: 84.040 W 功率因素: 0.628

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: 75.9 CCT: 3131K u': 0.2593
Rg: 121.4 LER: 276.2 Duv: -0.03397 v': 0.4718



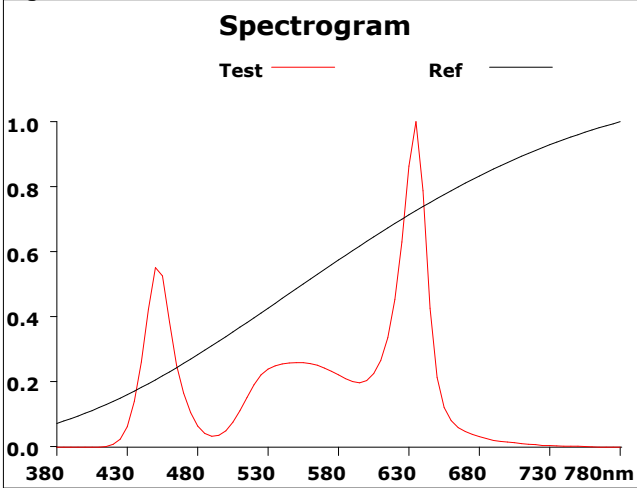


500			
Hue Bin	Rf	Chroma	Hue
1	77.4	9.4%	-1.3%
2	85.3	6.3%	0.1%
3	74.8	6.2%	8.7%
4	73.3	7.9%	13.1%
5	73.4	14.0%	12.5%
6	64.7	20.4%	6.7%
7	66.8	18.2%	-0.8%
8	78.1	8.4%	-9.8%
9	86.8	5.1%	-4.3%
10	86.3	-1.3%	4.5%
11	71.8	-0.1%	17.1%
12	73.4	8.3%	13.8%
13	78.4	10.8%	10.4%
14	69.0	16.8%	16.5%
15	70.8	15.7%	6.7%
16	73.6	18.7%	-5.5%

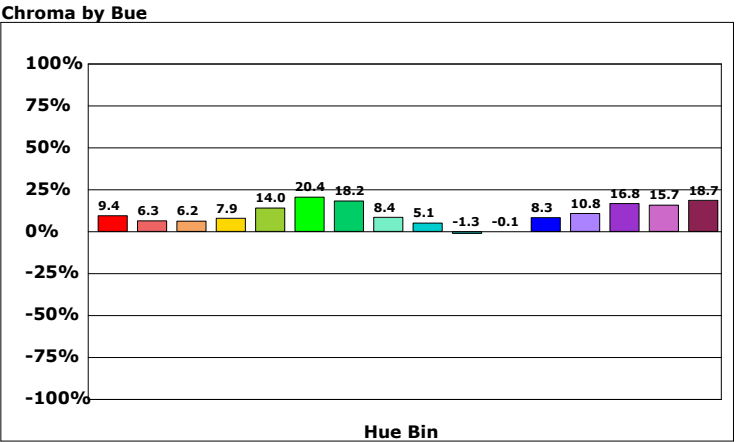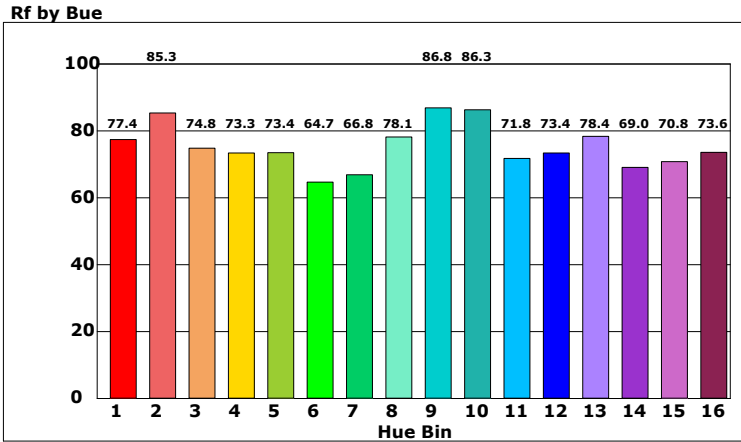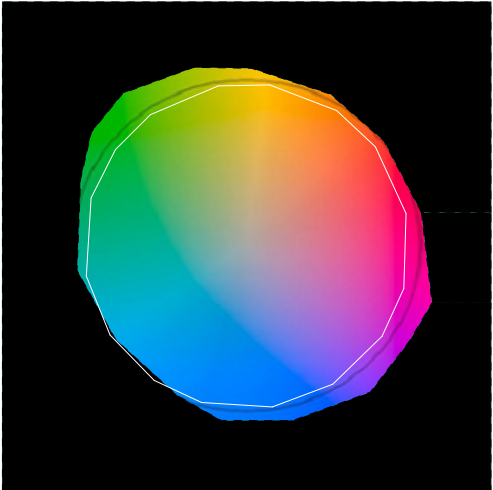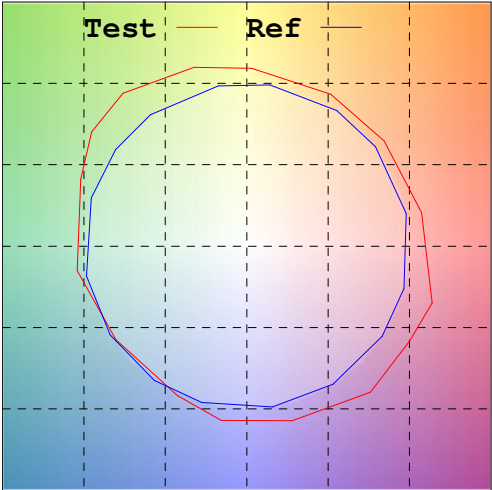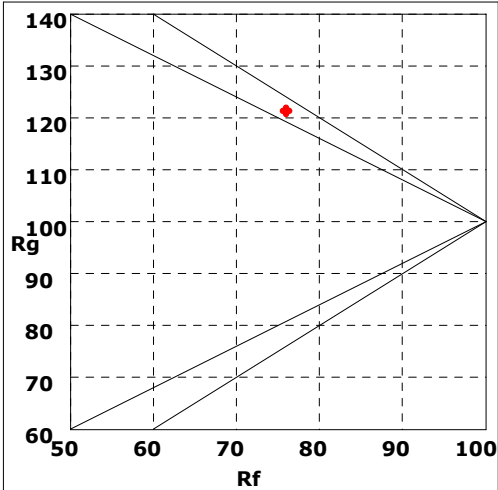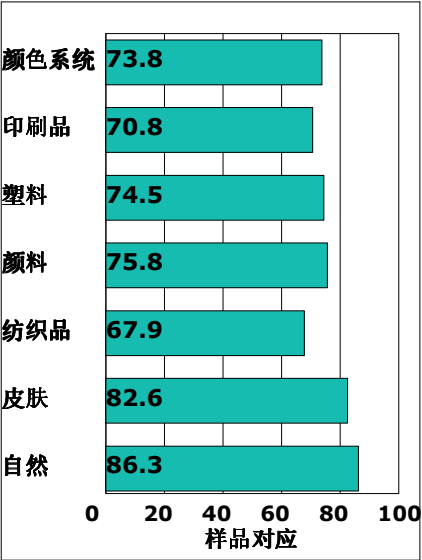


产品型号:
产品编号:
测试人员:
备注:


制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/17/14

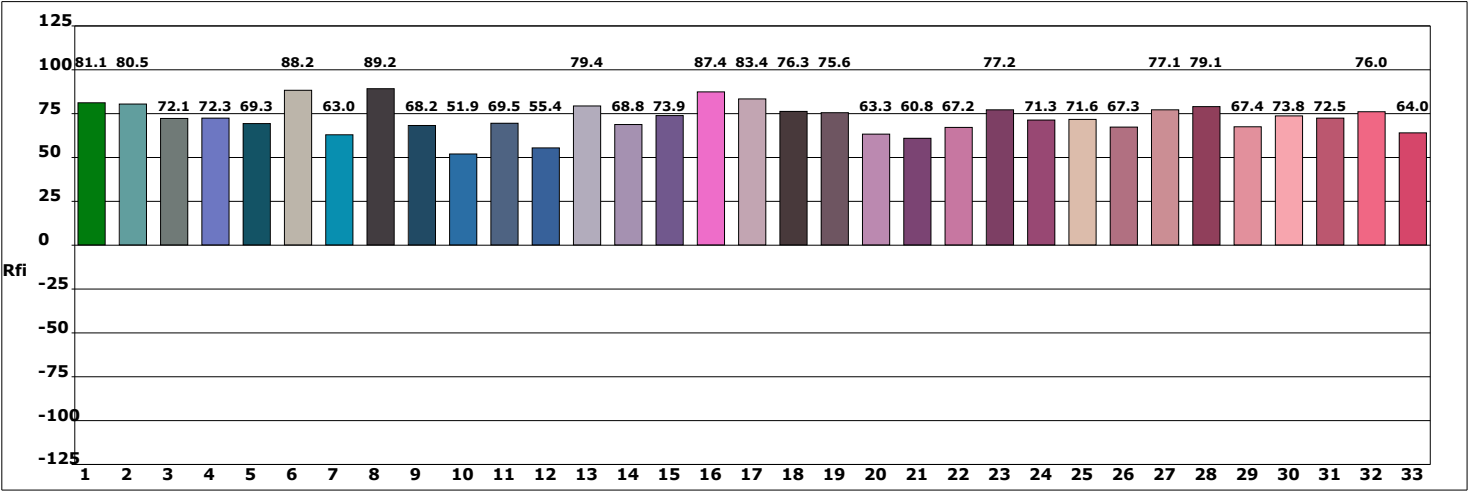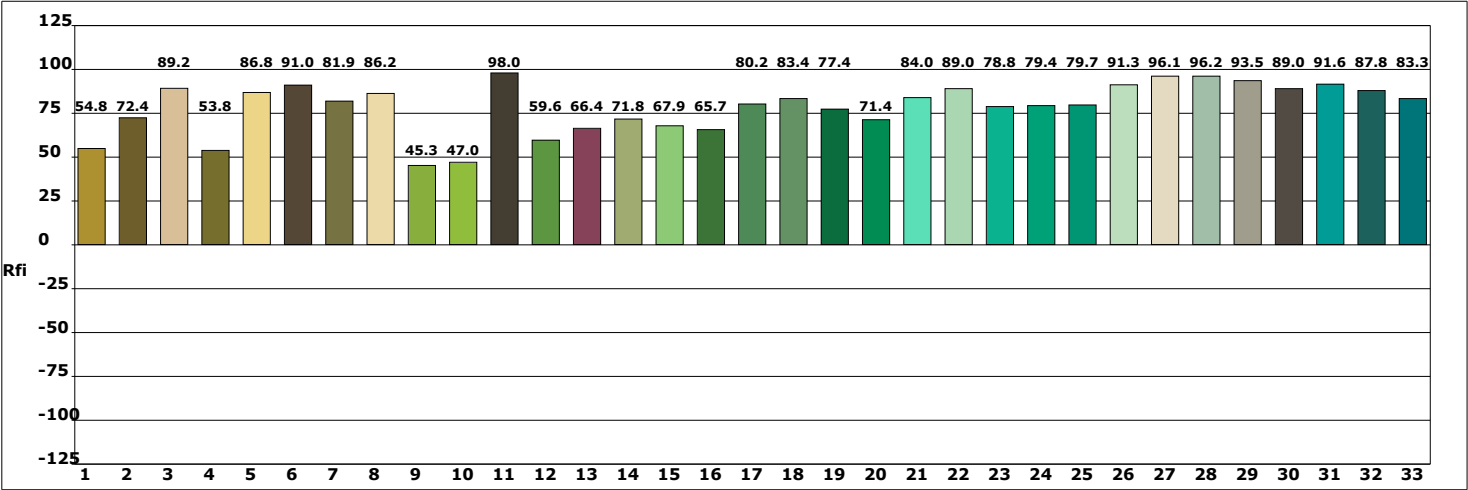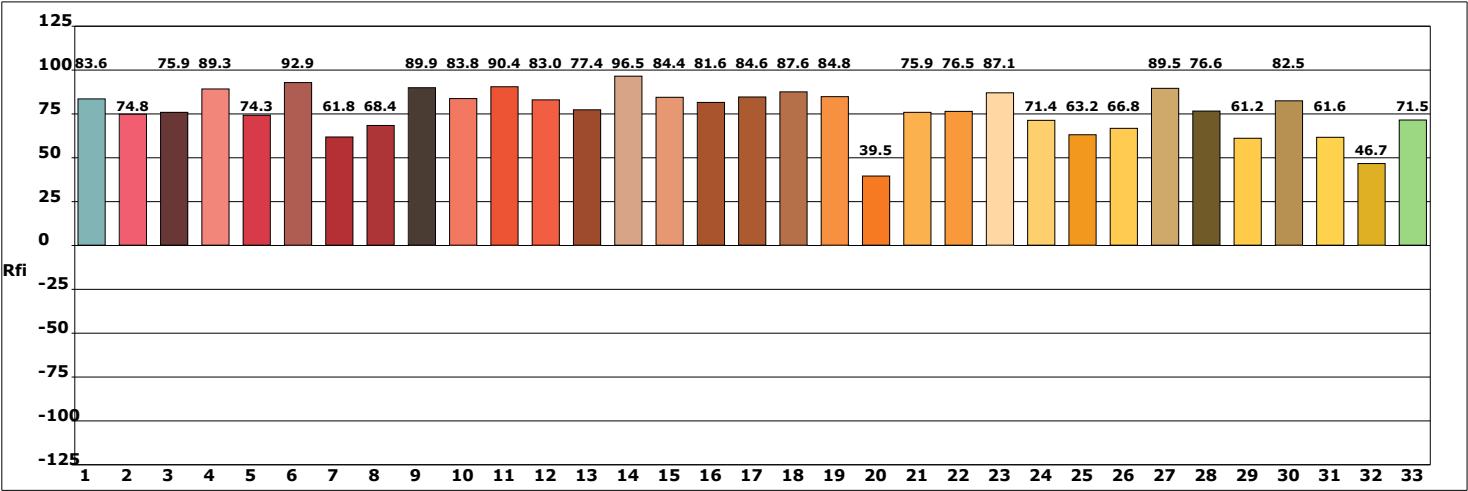

光谱图

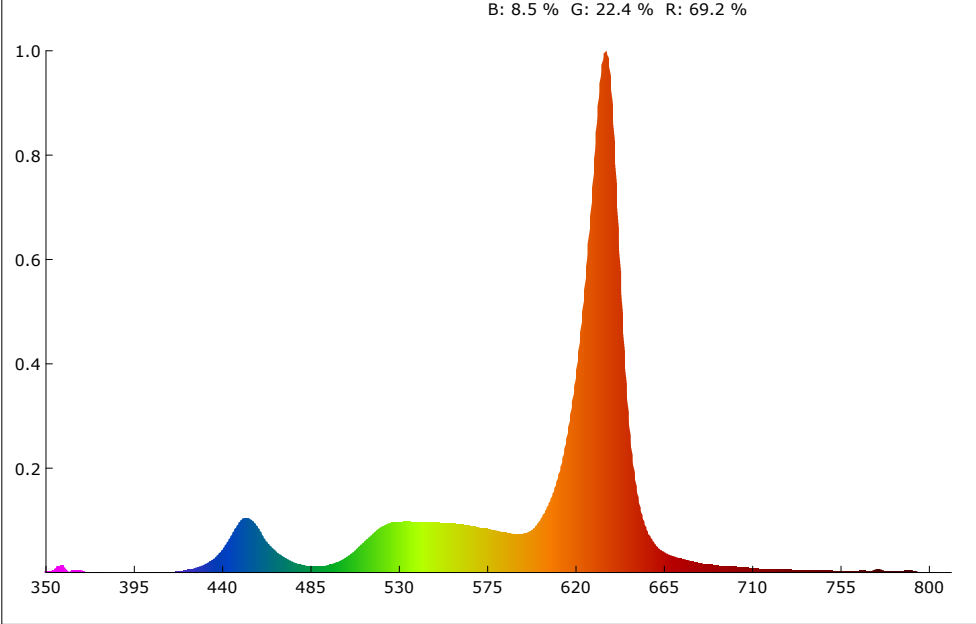

SDCM

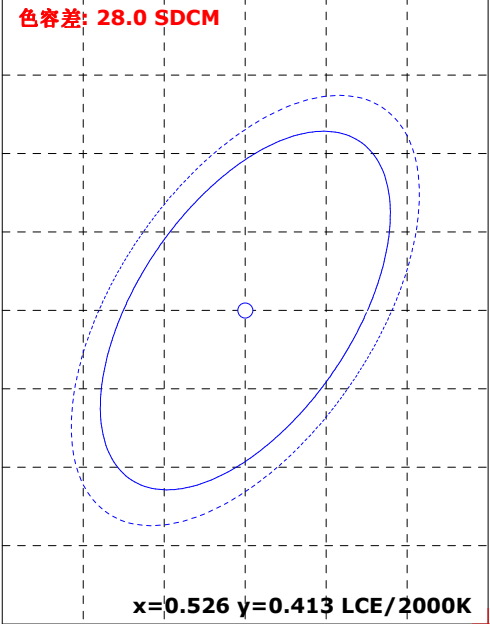

颜色参数:

坐标x: 0.5169 坐标y: 0.3538 坐标u: 0.3329 坐标v: 0.3417 坐标u': 0.3329 坐标v': 0.5125
红色比: 69.2 % 绿色比: 22.4 % 蓝色比: 8.5 % 光通量红色比: 46.6 % 光通量绿色比: 52.2 % 光通量蓝色比: 1.2 %

显色指数: 59.5 AvgR: 50.8
R1: 49.3 R2: 72.1 R3: 79.7 R4: 42.0 R5: 43.7 R6: 49.2 R7: 89.1 R8: 51.5
R9: 14.5 R10: 56.0 R11: 18.0 R12: 12.3 R13: 49.1 R14: 81.1 R15: 55.1


色温: 1709 K 光通量: 2099.541 lm 峰值波长: 635.5 nm 色容差: 28.0
明暗视觉比: 1.0 中心波长: 633.9 nm 主波长: 601.3 nm 质心波长: 601.6 nm
半宽度: 20.0 nm 色偏差: -0.01875 色纯度: 61.3 % 色质指数: 61.8
LER(TM-30): 247.4 辐射功率: 8486.8 mw 色域指数(Rg): 140.8 逼真度(Rf): 60.0
红光辐射功率: 5757.9 mw 近红辐射功率: 112.8 mw 远红辐射功率: 16.8 mw

电参数:





光效: 23.3 Lm/W 能效: 25.4 能效等级: G
电压: 220.8 V 电流: 0.647 A 功率: 90.130 W 功率因素: 0.630

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:


Rf: 60.0 CCT: 1709K u': 0.3329
Rg: 140.8 LER: 247.4 Duv: -0.01875 v': 0.5125

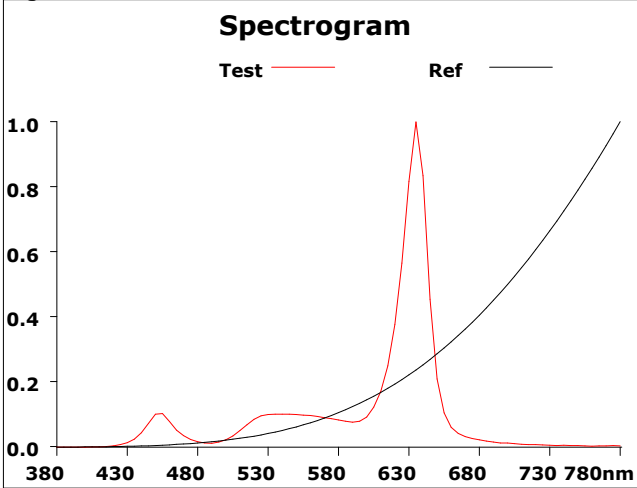


500			
Hue Bin	Rf	Chroma	Hue
1	64.4	11.7%	-0.5%
2	59.9	15.1%	4.8%
3	55.1	21.8%	1.2%
4	54.6	34.6%	14.1%
5	66.5	40.5%	8.9%
6	32.8	50.0%	14.5%
7	30.1	35.8%	-16.9%
8	38.9	32.5%	-28.3%
9	48.4	15.9%	-19.9%
10	62.2	9.9%	-18.6%
11	73.1	10.3%	-10.9%
12	67.0	7.4%	-16.6%
13	62.1	2.9%	-31.0%
14	62.9	10.3%	-30.8%
15	78.4	8.2%	-8.8%
16	78.0	9.8%	-5.5%

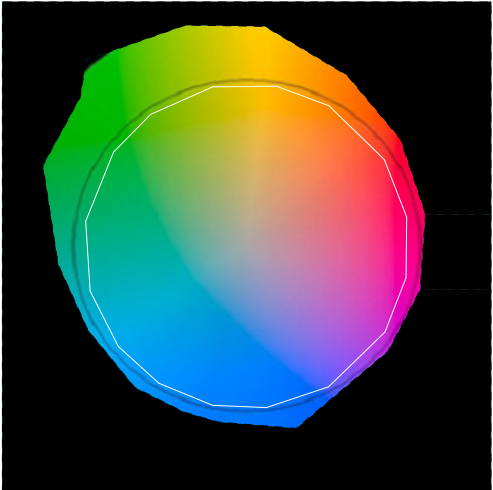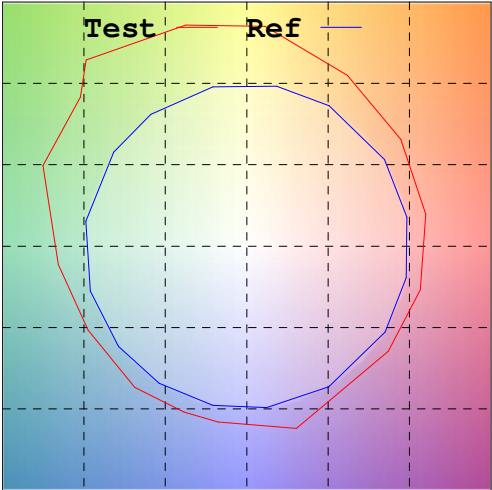
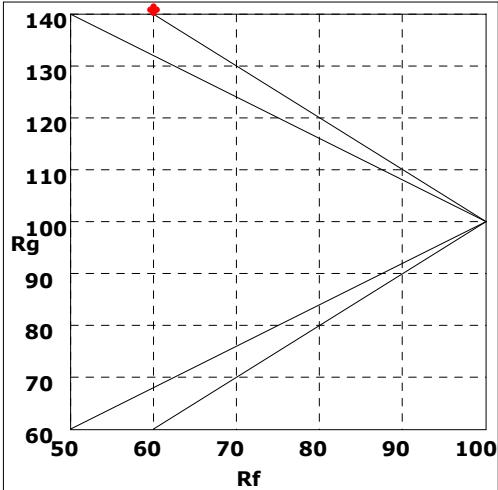
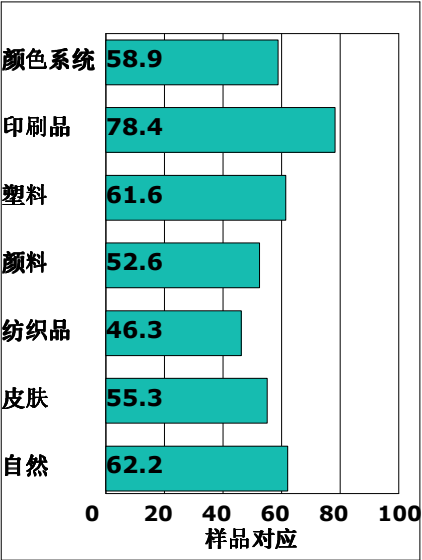


Rf by Bue

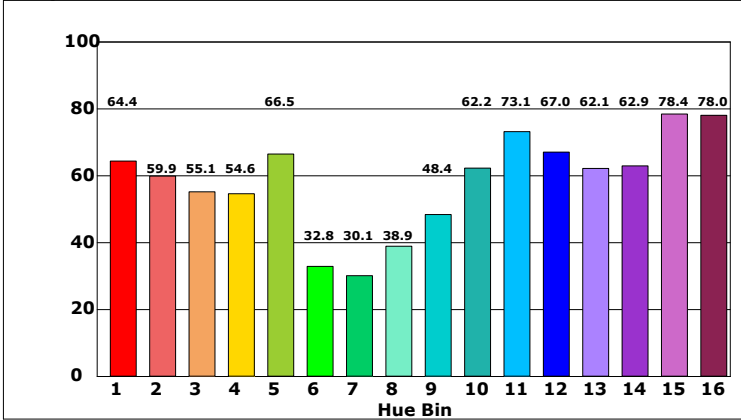


Chroma by Bue

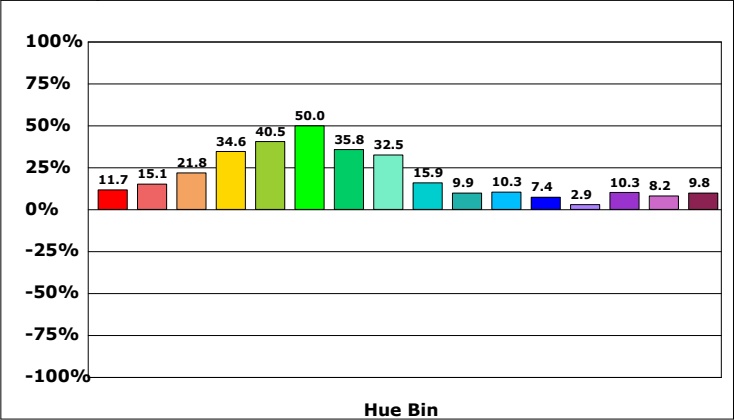


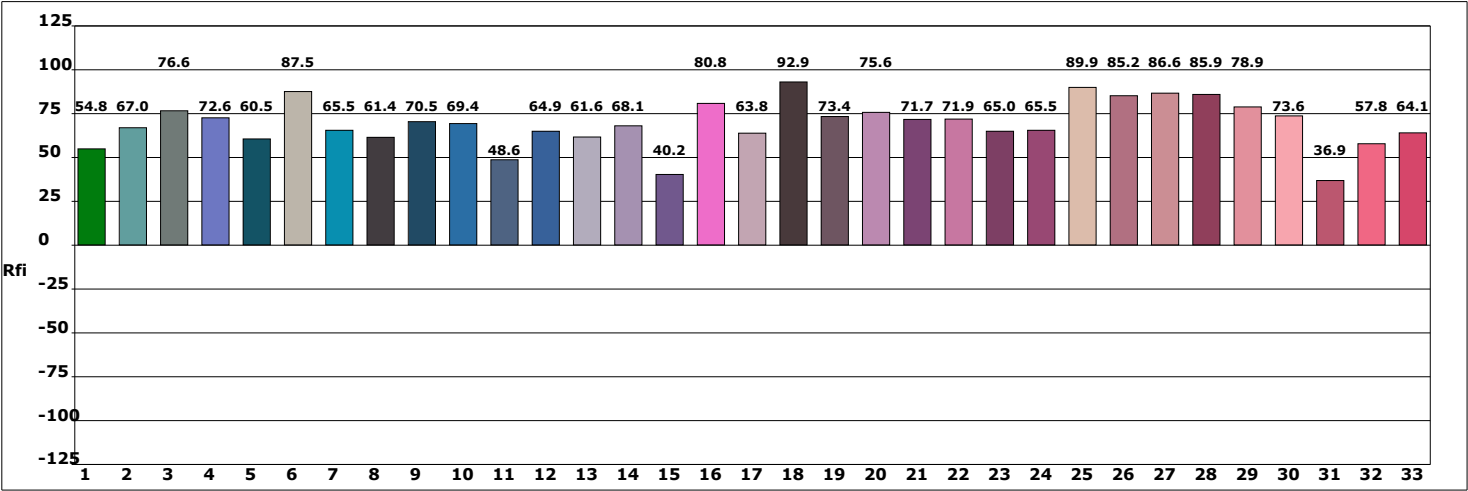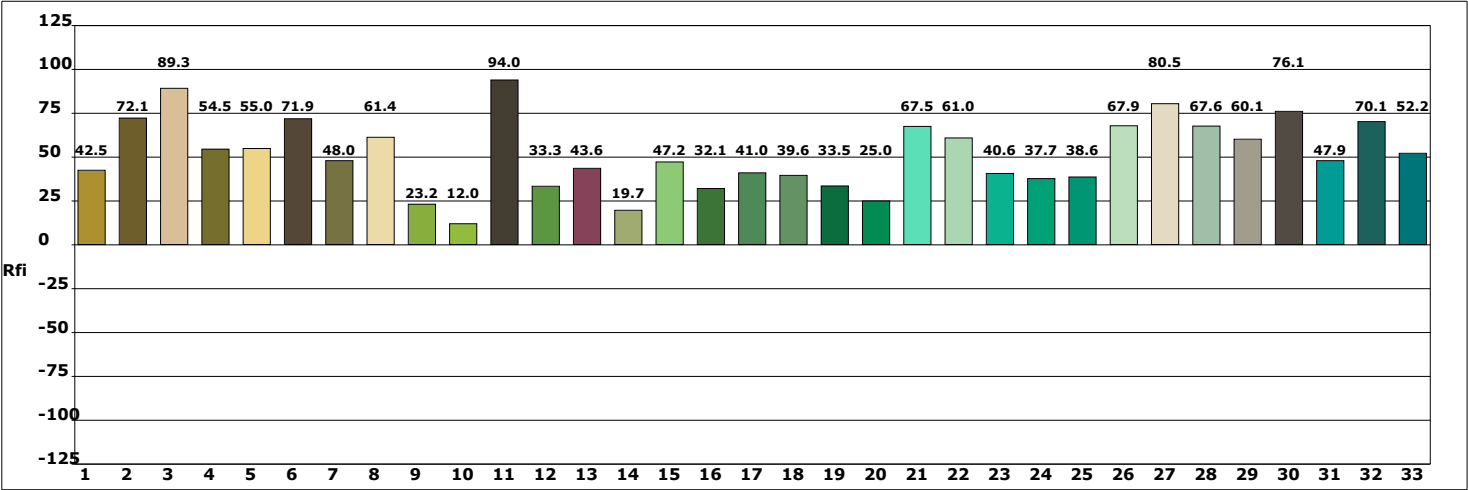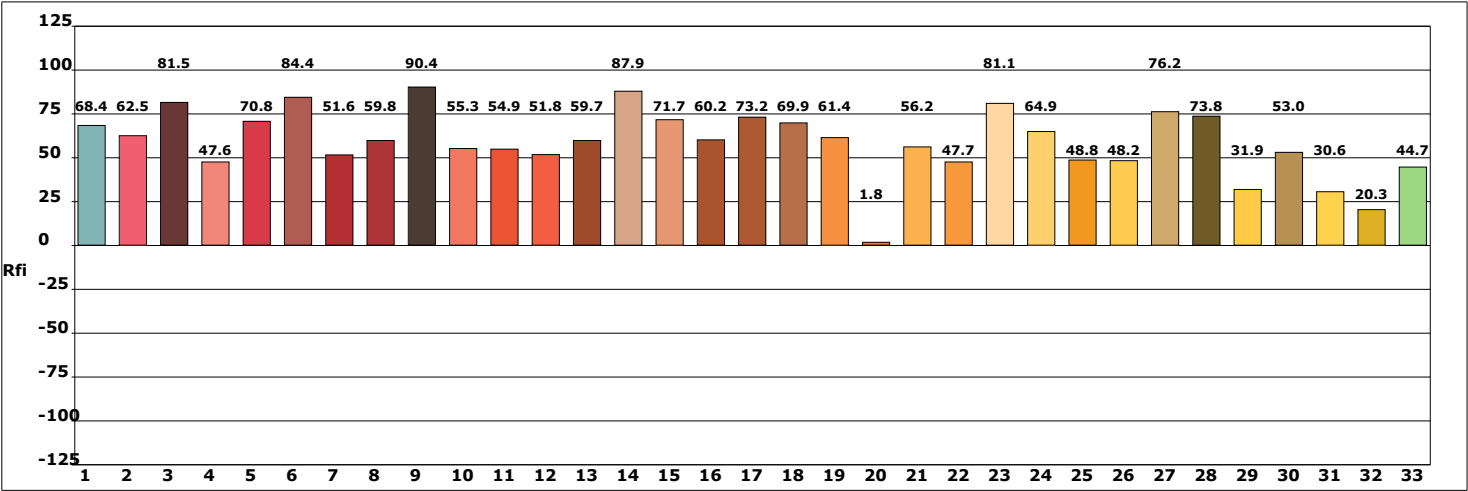

光谱图

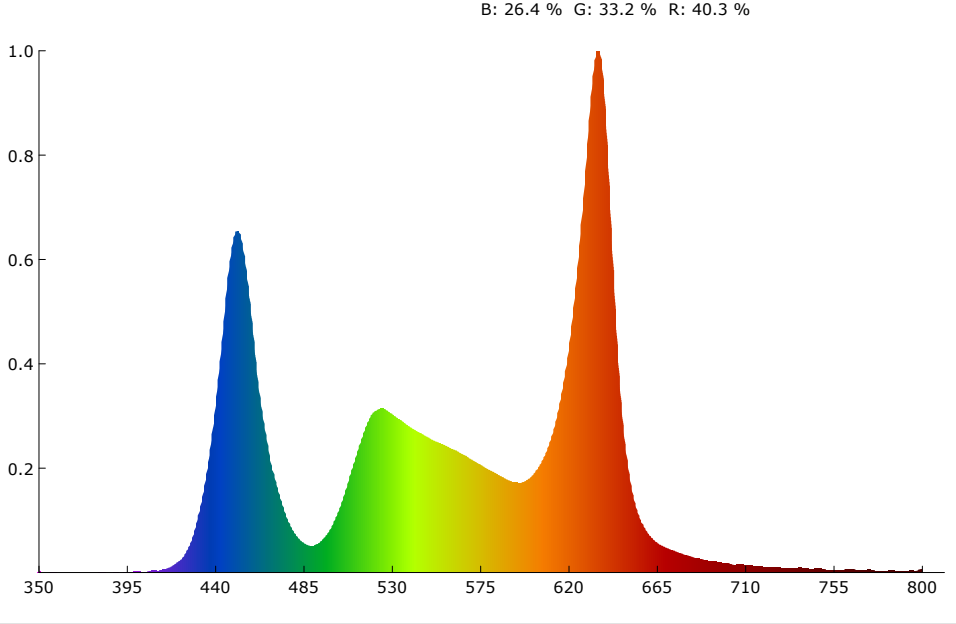

SDCM

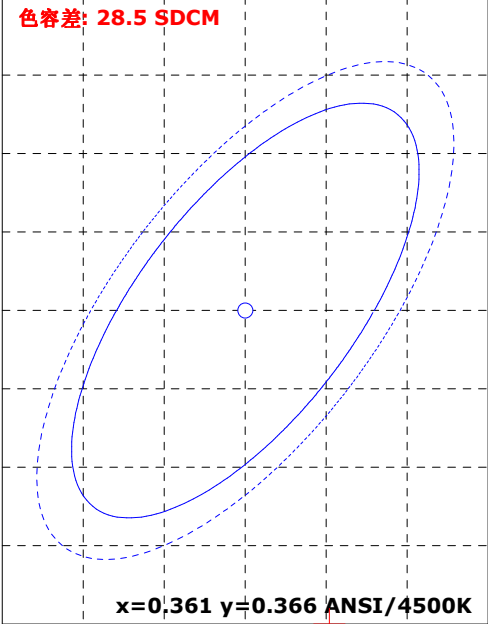

颜色参数:

坐标x: 0.3602 坐标y: 0.3092 坐标u: 0.2405 坐标v: 0.3097 坐标u': 0.2405 坐标v': 0.4646
红色比: 40.3 % 绿色比: 33.2 % 蓝色比: 26.4 % 光通量红色比: 26.1 % 光通量绿色比: 70.6 % 光通量蓝色比: 3.3 %

显色指数: 65.2 AvgR: 56.9
R1: 57.6 R2: 83.4 R3: 72.3 R4: 57.8 R5: 64.4 R6: 81.5 R7: 76.0 R8: 29.0
R9: -57.0 R10: 77.2 R11: 50.8 R12: 77.1 R13: 63.2 R14: 79.7 R15: 41.1


色温: 4082 K 光通量: 2686.766 lm 峰值波长: 635.5 nm 色容差: 28.5
明暗视觉比: 2.0 中心波长: 633.3 nm 主波长: 0.0 nm 质心波长: 559.7 nm
半宽度: 21.1 nm 色偏差: -0.02906 色纯度: 0.0 % 色质指数: 73.0
LER(TM-30): 268.2 辐射功率: 10016.7 mw 色域指数(Rg): 121.5 逼真度(Rf): 76.3
红光辐射功率: 3992.0 mw 近红辐射功率: 105.5 mw 远红辐射功率: 13.1 mw

电参数:







光效: 26.1 Lm/W 能效: 28.4 能效等级: G
电压: 220.8 V 电流: 0.731 A 功率: 103.100 W 功率因素: 0.638

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: 76.3 CCT: 4082K u': 0.2405
Rg: 121.5 LER: 268.2 Duv: -0.02906 v': 0.4646



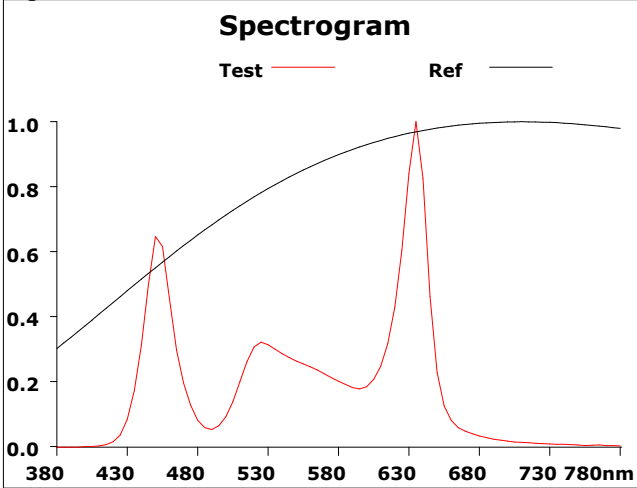


500			
Hue Bin	Rf	Chroma	Hue
1	69.0	15.9%	-0.3%
2	75.5	10.6%	-5.3%
3	82.0	7.7%	-1.1%
4	87.7	3.3%	5.3%
5	78.7	7.2%	8.7%
6	70.8	15.7%	10.0%
7	73.3	15.4%	2.9%
8	73.8	13.6%	-0.2%
9	84.0	8.6%	-2.4%
10	90.3	2.2%	0.7%
11	78.8	2.6%	12.1%
12	72.4	4.1%	14.2%
13	74.3	6.4%	19.2%
14	56.9	9.9%	22.0%
15	65.2	18.8%	14.2%
16	63.9	20.8%	1.6%

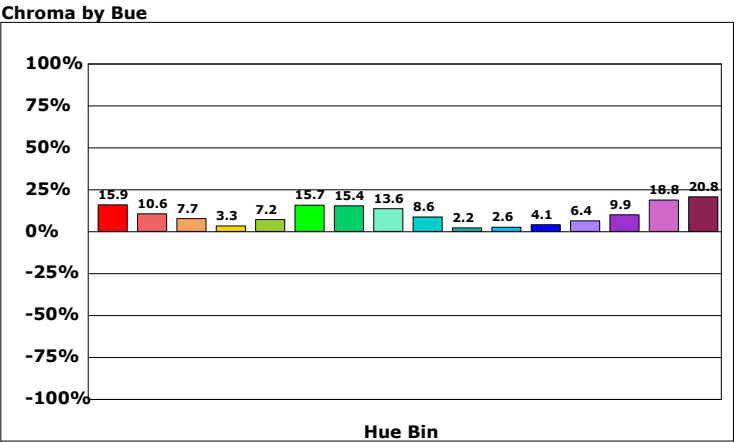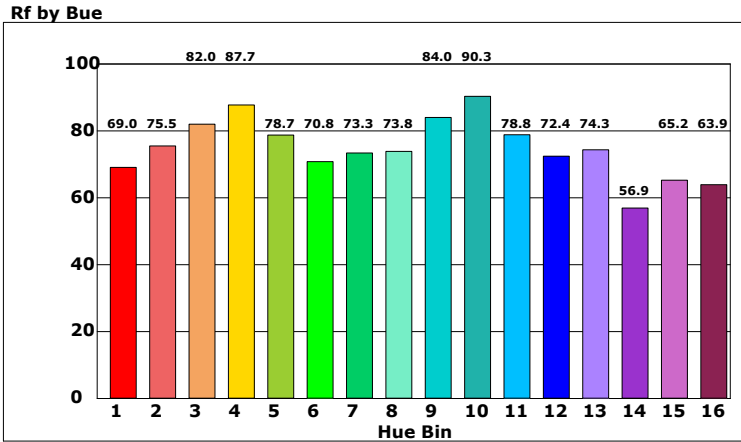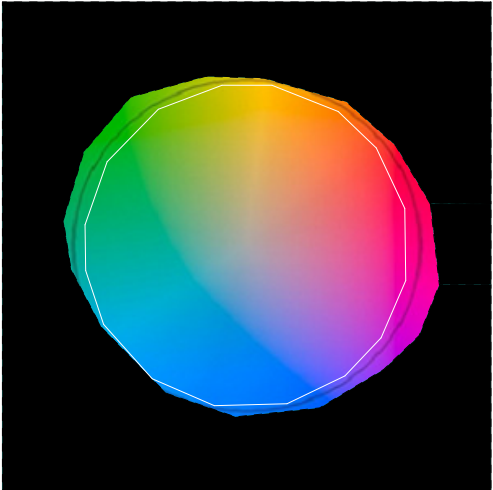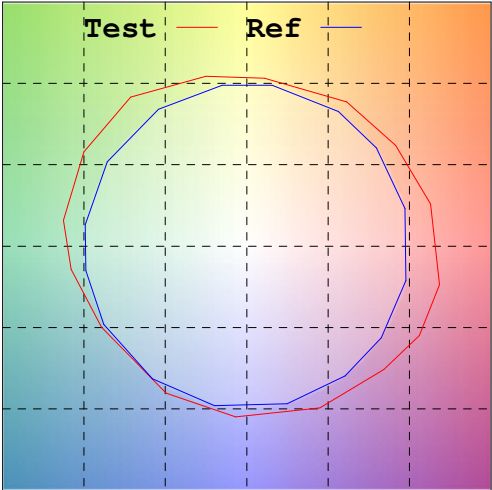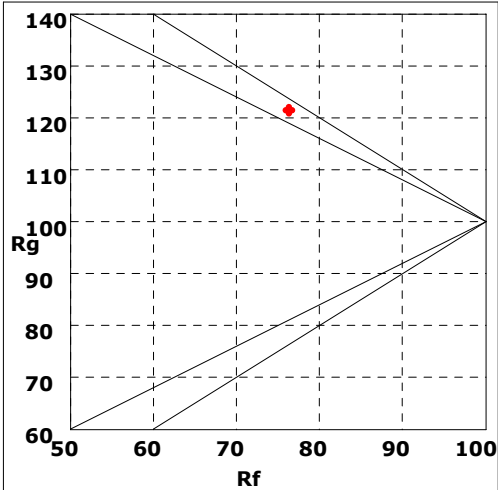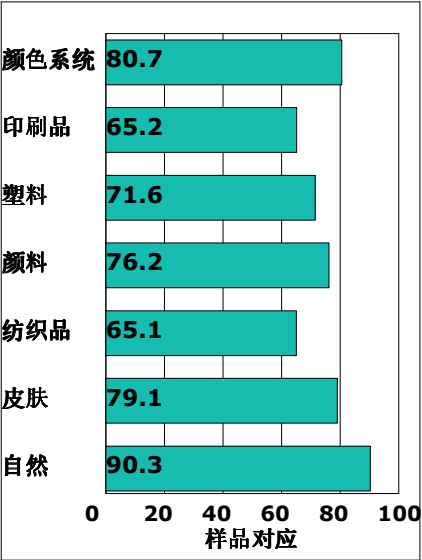


产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/17/14

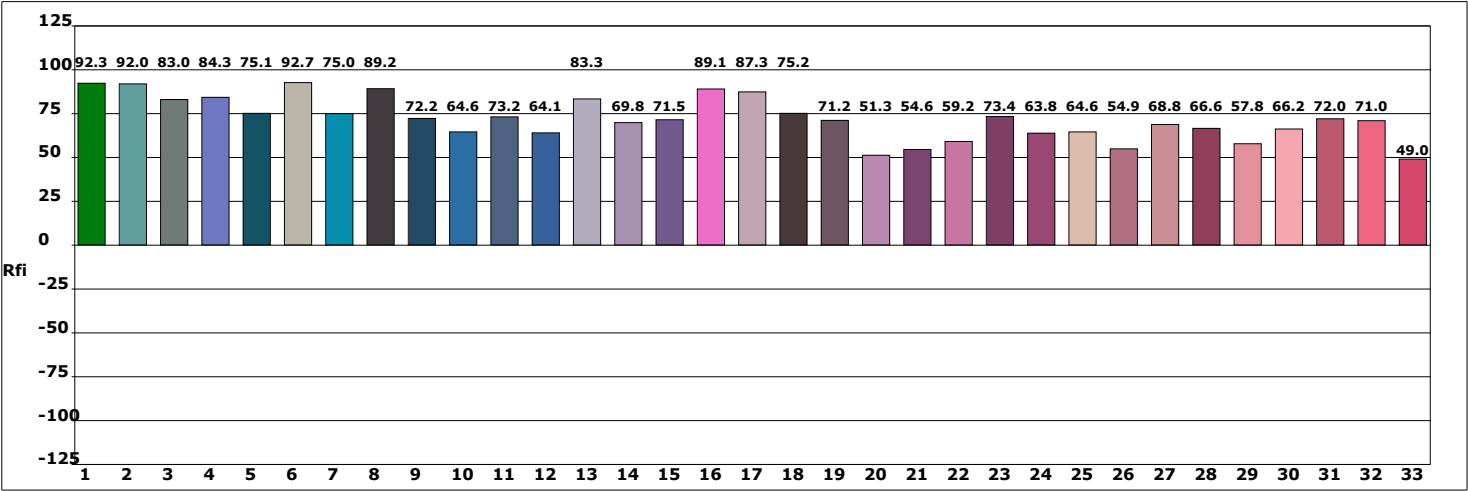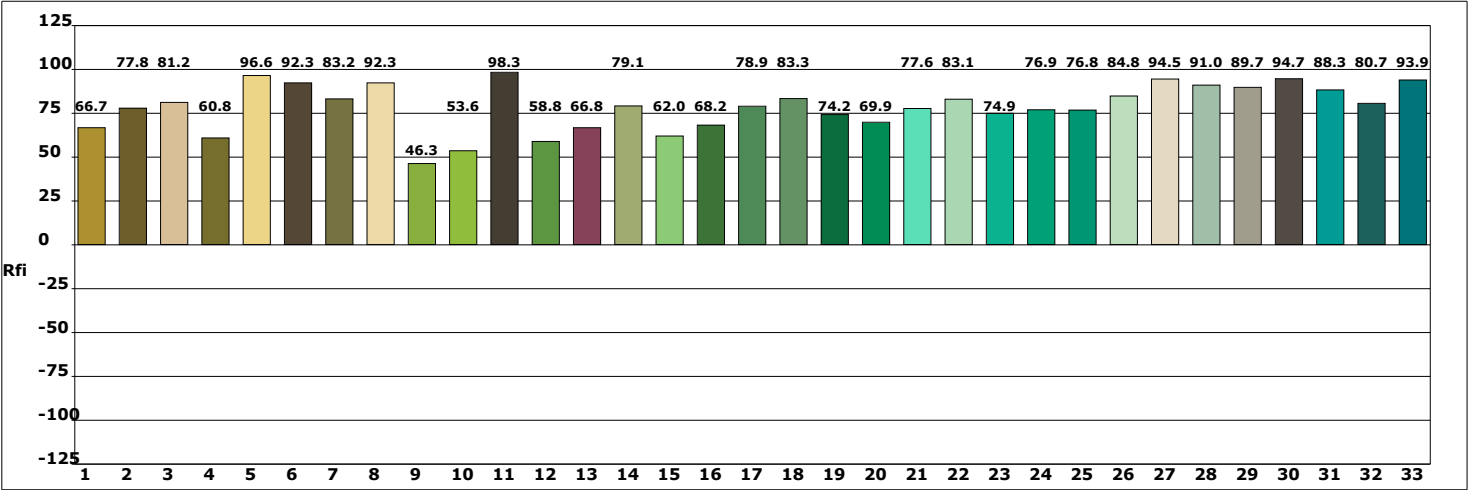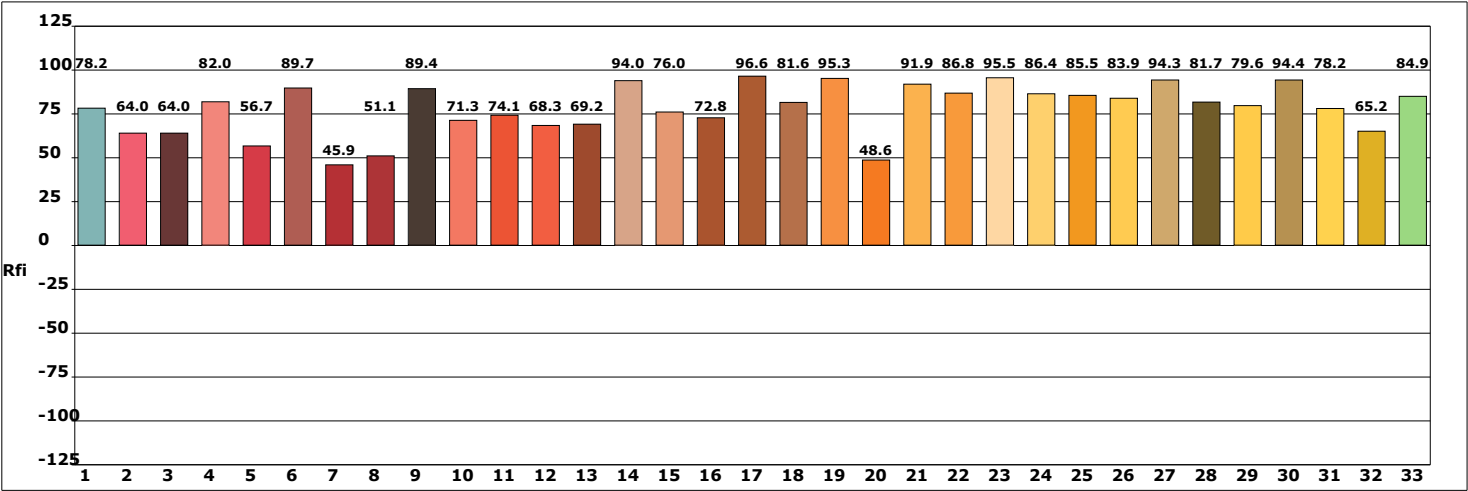

光谱图

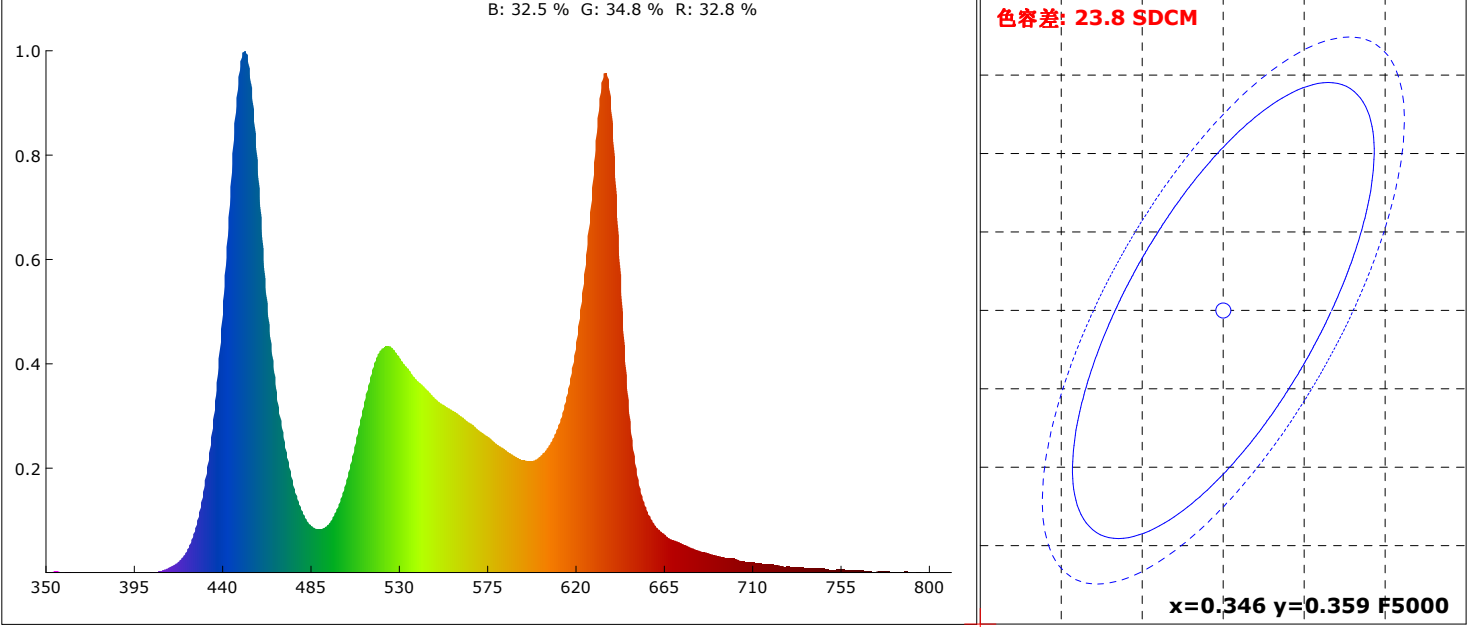

颜色参数:

坐标x: 0.3229 坐标y: 0.2915 坐标u: 0.2207 坐标v: 0.2989 坐标u': 0.2207 坐标v': 0.4484
红色比: 32.8 % 绿色比: 34.8 % 蓝色比: 32.5 % 光通量红色比: 21.4 % 光通量绿色比: 74.4 % 光通量蓝色比: 4.2 %

显色指数: 68.4 AvgR: 59.7
R1: 63.0 R2: 88.6 R3: 65.9 R4: 60.3 R5: 72.0 R6: 87.8 R7: 75.3 R8: 34.4
R9: -60.6 R10: 87.1 R11: 54.5 R12: 74.6 R13: 69.6 R14: 76.8 R15: 45.8


色温: 6133 K 光通量: 2675.878 lm 峰值波长: 451.8 nm 色容差: 23.8
明暗视觉比: 2.3 中心波长: 452.1 nm 主波长: 0.0 nm 质心波长: 547.2 nm
半宽度: 23.0 nm 色偏差: -0.02310 色纯度: 0.0 % 色质指数: 79.3
LER(TM-30): 265.5 辐射功率: 10077.3 mw 色域指数(Rg): 118.9 逼真度(Rf): 75.2
红光辐射功率: 3267.3 mw 近红辐射功率: 97.5 mw 远红辐射功率: 3.4 mw

电参数:

光效: 26.0 Lm/W 能效: 28.3 能效等级: G
电压: 220.9 V 电流: 0.730 A 功率: 102.800 W 功率因素: 0.637

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: 75.2 CCT: 6133K u': 0.2207
Rg: 118.9 LER: 265.5 Duv: -0.02310 v': 0.4484

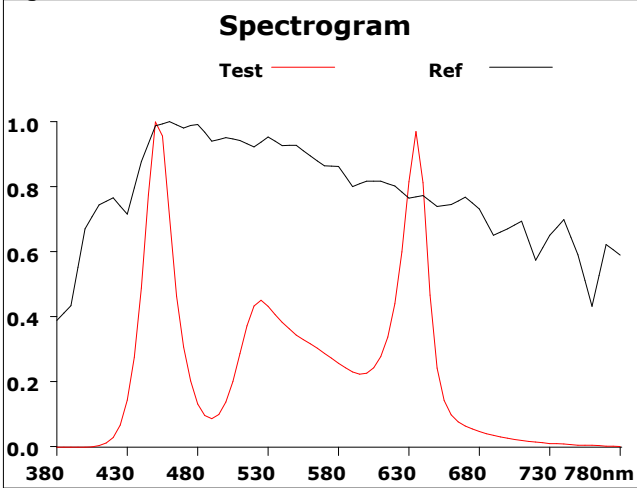

500			
Hue Bin	Rf	Chroma	Hue
1	66.1	15.5%	1.2%
2	80.2	9.7%	-3.4%
3	81.0	7.1%	-0.8%
4	83.4	2.5%	8.1%
5	78.0	4.6%	8.4%
6	76.4	11.7%	9.5%
7	81.4	11.4%	1.8%
8	80.4	9.4%	2.6%
9	87.7	3.0%	4.1%
10	81.1	-0.2%	8.4%
11	68.6	2.1%	17.2%
12	70.1	1.4%	18.7%
13	69.5	7.2%	23.5%
14	58.5	10.9%	21.5%
15	59.1	29.0%	18.3%
16	69.5	15.2%	4.6%

