


光谱图

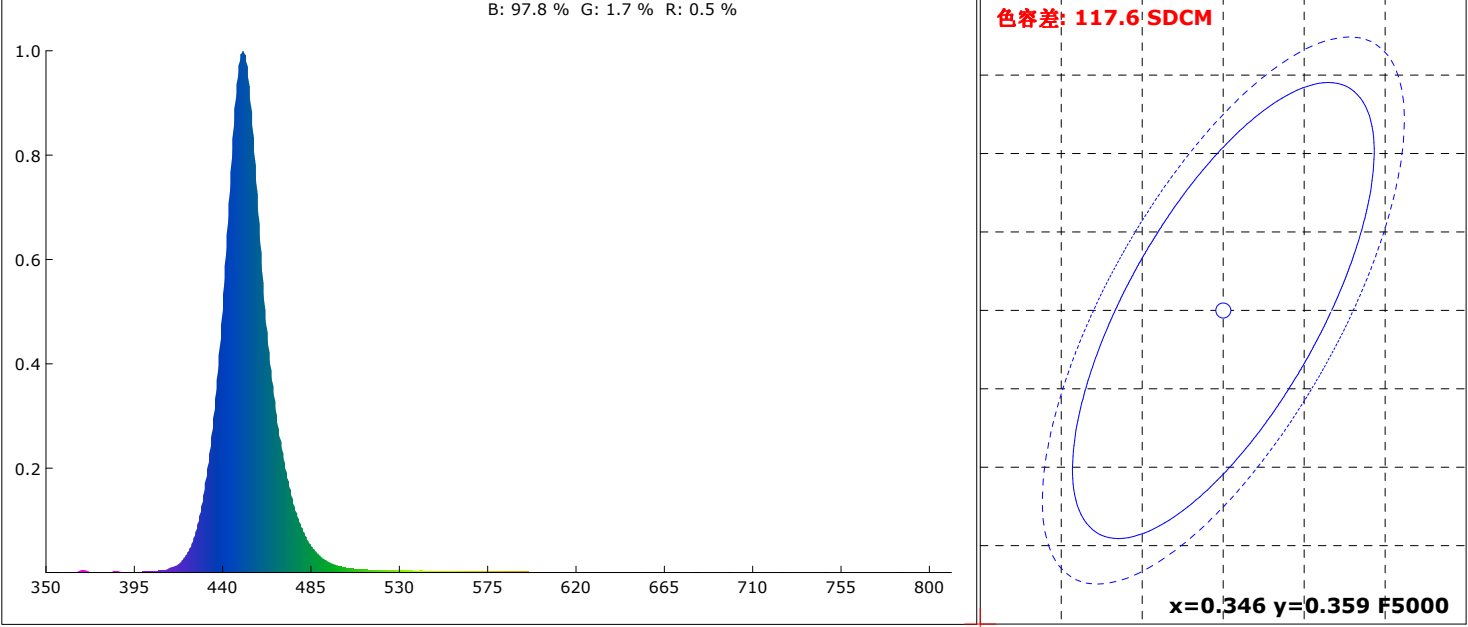

颜色参数:

坐标x: 0.1539 坐标y: 0.0324 坐标u: 0.1998 坐标v: 0.0631 坐标u': 0.1998 坐标v': 0.0947
红色比: 0.5 % 绿色比: 1.7 % 蓝色比: 97.8 % 光通量红色比: 2.0 % 光通量绿色比: 22.8 % 光通量蓝色比: 75.2 %

显色指数: -49.6 AvgR: -49.3
R1: 15.3 R2: -33.6 R3: -99.0 R4: -98.6 R5: 23.0 R6: -40.7 R7: -57.9 R8: -44.9
R9: -99.0 R10: -99.0 R11: -99.0 R12: -99.0 R13: 0.5 R14: -35.0 R15: 27.2


色温: 99999 K 光通量: 363.837 lm 峰值波长: 450.6 nm 色容差: 117.6
明暗视觉比: 19.1 中心波长: 451.2 nm 主波长: 456.4 nm 质心波长: 455.1 nm
半宽度: 21.6 nm 色偏差: 0.16204 色纯度: 97.4 % 色质指数: 0.3
LER(TM-30): 42.8 辐射功率: 8499.8 mw 色域指数(Rg): nan 逼真度(Rf): -nan(ind)
红光辐射功率: 40.2 mw 近红辐射功率: 5.2 mw 远红辐射功率: 1.8 mw

电参数:


光效: 5.9 Lm/W 能效: 6.5 能效等级: G
电压: 220.8 V 电流: 0.458 A 功率: 61.370 W 功率因素: 0.606

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/17/14
备注:

Rf: -nan(ind) CCT: 99999K u': 0.1998
Rg: nan LER: 42.8 Duv: 0.16204 v': 0.0947

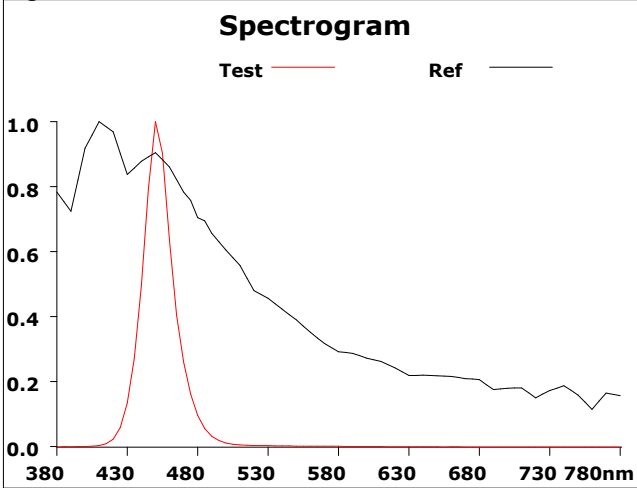

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-143.9%	57.3%
2	15.9	14.2%	-0.1%
3	-nan(ind)	nan%	-nan(ind)%
4	-nan(ind)	nan%	-nan(ind)%
5	-nan(ind)	nan%	-nan(ind)%
6	-nan(ind)	nan%	-nan(ind)%
7	-nan(ind)	nan%	-nan(ind)%
8	-nan(ind)	nan%	-nan(ind)%
9	-nan(ind)	nan%	-nan(ind)%
10	-nan(ind)	nan%	-nan(ind)%
11	0.0	53.9%	-225.6%
12	0.0	-30.3%	-345.8%
13	0.0	-180.3%	-333.0%
14	0.0	-293.2%	-264.3%
15	0.0	-399.7%	-181.4%
16	0.0	-336.0%	-6.9%

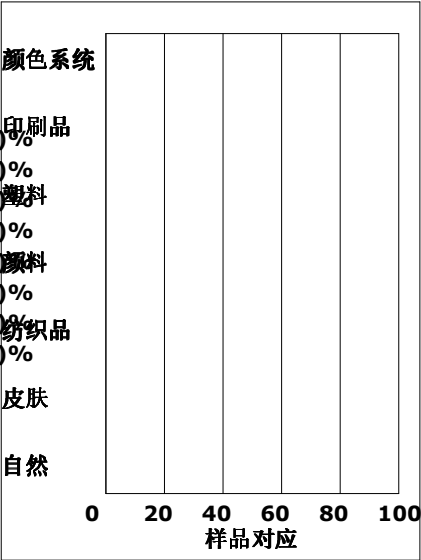

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012