

MOVING MINI BEAM

It is the preferred choice for entertainment lighting in bar, ktv, live rooms and other places.

USER MANUAL



REV 1.0 - 24

English Version




Table of contents

- Caution!3
- Introduction3
- Safety instructions.....3
- Present4
 - 8 Colors.....4
 - 10 Patterns5
- Functional Description.....5
- Channel 15CH5
- Parameter6

Caution!



Be careful with your operations. With a dangerous voltage you can suffer a dangerous electric



For your own safety, please read this user manual carefully before you initial start-up. Follow operating safety precautions and pay attention to warning signs methods and equipment



Indoor use only! To prevent risk of fire or shock, do not expose this product to rain or moisture. IP 20 rating.

The ambient temperature must be maintained between -5° C and +45° C at all times.

Every person involved with the installation, operation and maintenance of this device has to

- be qualified
- follow the instructions of this manual
- consider this manual to be part of the total product
- keep this manual for the entire service life of the product
- pass this manual on to every further owner or user of the product
- download the latest version of the user manual from the Internet

Introduction

The Moving mini beam is a powerful and compact beam light. With ten patterns and eight colors. Suitable for use in a variety of professional and non-professional occasions, it is the preferred choice for entertainment lighting in bar, ktv, live rooms and other places.

Unpack your item. Before you initial start-up, please make sure that there is no damage caused by transportation. Should there be any, consult your dealer and do not use the device.

Safety instructions

This device has left our premises in absolutely perfect condition. In order to maintain this condition and to ensure a safe operation, it is absolutely necessary for the user to follow the safety instructions and warning notes written in this user manual. Always disconnect from the mains, when the device is not in use or before cleaning it. Keep away children and amateurs from the device! There are no serviceable parts inside the device. Maintenance and service operations are only to be carried out by authorized dealers.

MOVING MINI BEAM

Present




X: 540°
Y: 180°




Menu Key: Select Function
Up key: Parameter increment
Down key: Parameter decrement
Confirmation key: OK and save

3-Core XLR In & Out

8 Colors

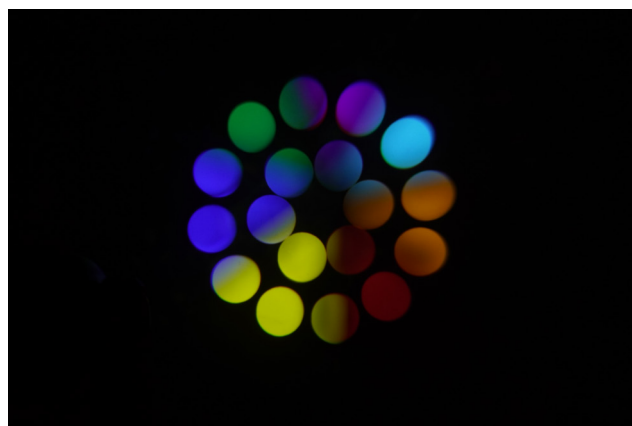

10 Patterns

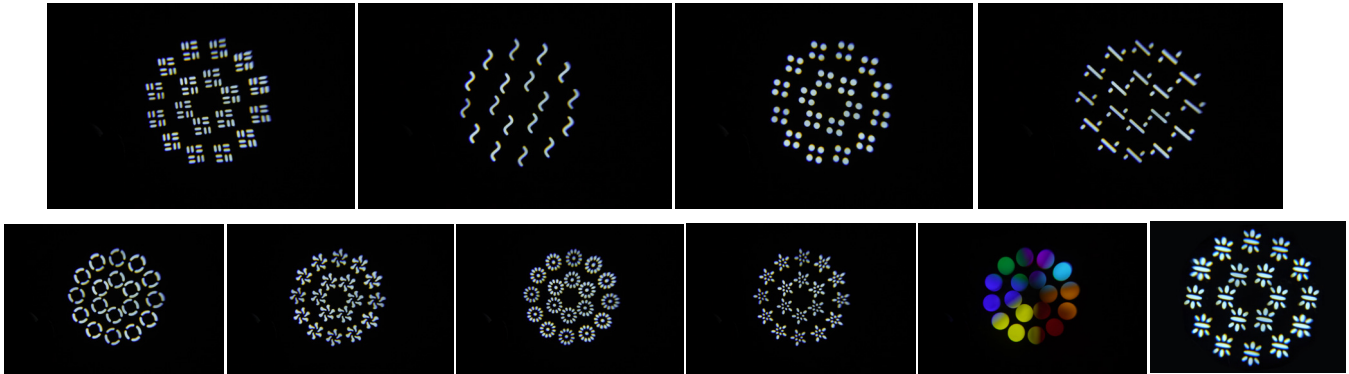

Functional Description

Demonstrate	Regulate	functionality
Addr	A001-A512	512 Address Settings
CHnd	15CH	Channel mode
SLnd	dnh	DMX Mode
	Auto	Self-propelled mode
	Soun	Sound Control Mode
PSEt	NO	X motor forward
	YES	X motor reverse
tiLt	NO	Y motor forward
	YES	Y motor reverse
SenS	0-99	Sensitivity body adjustment
LEd	on	Display On
	off	Display Off
dISP	off	Display forward
	on	Display reverse
tenp	xxx	Temperature display
Uer	U102	Version number
FAct	NO	
	YES	Restore Default Settings

Channel 15CH

	Functionality	Clarification
1	Horizontal operation	0-255
2	Horizontal fine adjustment	0-255
3	Vertical operation	0-255

MOVING MINI BEAM

	Functionality	Clarification
4	Vertical fine adjustment	0-255
5	Motor speed	0-255
6	Dimming	0-255
7	Strobe	0-255
8	Color	
	Color Selection	0-15,16-31,32-47,48-63,64-79,80-95, 96-111,112-127
	128-255	Automatic color change from slow to fast
9	Pattern	
	Fixed pattern	0-15,16-31,32-47,48-63,64-79,80-95, 96-111,112-127,128-143,144-169
	160-255	Auto Pattern Change Slow to Fast
10	Trigonometry motor operation	0-127 off 128-136 on 137-255 rotate from slow to fast
11	Seven colors	0-126 off 127-255 on
12	Automatic mode	
	0-50	Other channel roles
	51-100	Fast self-propelled
	101-200	Slow self-propelled
	201-255	Voice-activated mode
13	Reset	250-255 (5s)
14	Light Strip Effect	0-255
15	Speed	0-255 Speed from fast to slow

Parameter

Product:	Moving mini beam
VOLTAGE:	AC110-240V, 50/60Hz
Wattage:	120W
Light Source:	1pcs 100W white light beads,12pcs RGB 5050 SMD beads
Patterns:	10 patterns
Color:	8 colors
Channel:	15CH
Control Modes:	Voice-activated, master-slave, self-propelled, DMX
Pan:	540°
Tilt:	180°

Please note: All information is subject to change without notice.