General Description

The 5T9304I differential clock buffer is a user-selectable differential input to four LVDS outputs. The fanout from a differential input to four LVDS outputs reduces loading on the preceding driver and provides an efficient clock distribution network. The 5T9304I can act as a translator from a differential HSTL, eHSTL, LVEPECL (2.5V), LVPECL (3.3V), CML, or LVDS input to LVDS outputs. A single-ended 3.3V / 2.5V LVTTL input can also be used to translate to LVDS outputs. The redundant input capability allows for an asynchronous change-over from a primary clock source to a secondary clock source. Selectable reference inputs are controlled by SEL.

The 5T9304I outputs can be asynchronously enabled/disabled. When disabled, the outputs will drive to the value selected by the GL pin. Multiple power and grounds reduce noise.


Features

- Guaranteed low skew: 50ps (maximum)
- Very low duty cycle distortion: 125ps (maximum)
- Propagation delay: 1.9ns (maximum)
- Up to 450MHz operation
- Selectable inputs
- Hot insertable and over-voltage tolerant inputs
- 3.3V/2.5V LVTTL, HSTL eHSTL, LVEPECL (2.5V), LVPECL (3.3V), CML or LVDS input interface
- Selectable differential inputs to four LVDS outputs
- 2.5V V_{DD}
- -40°C to 85°C ambient operating temperature
- Available in lead-free (RoHS 6) package

Applications

- Clock distribution

Pin Assignment




5T9304I

24-Lead TSSOP, E-Pad
4.40mm x 7.8mm x 0.925mm
G Package
Top View

© 2019 Renesas Electronics Corporation

Block Diagram

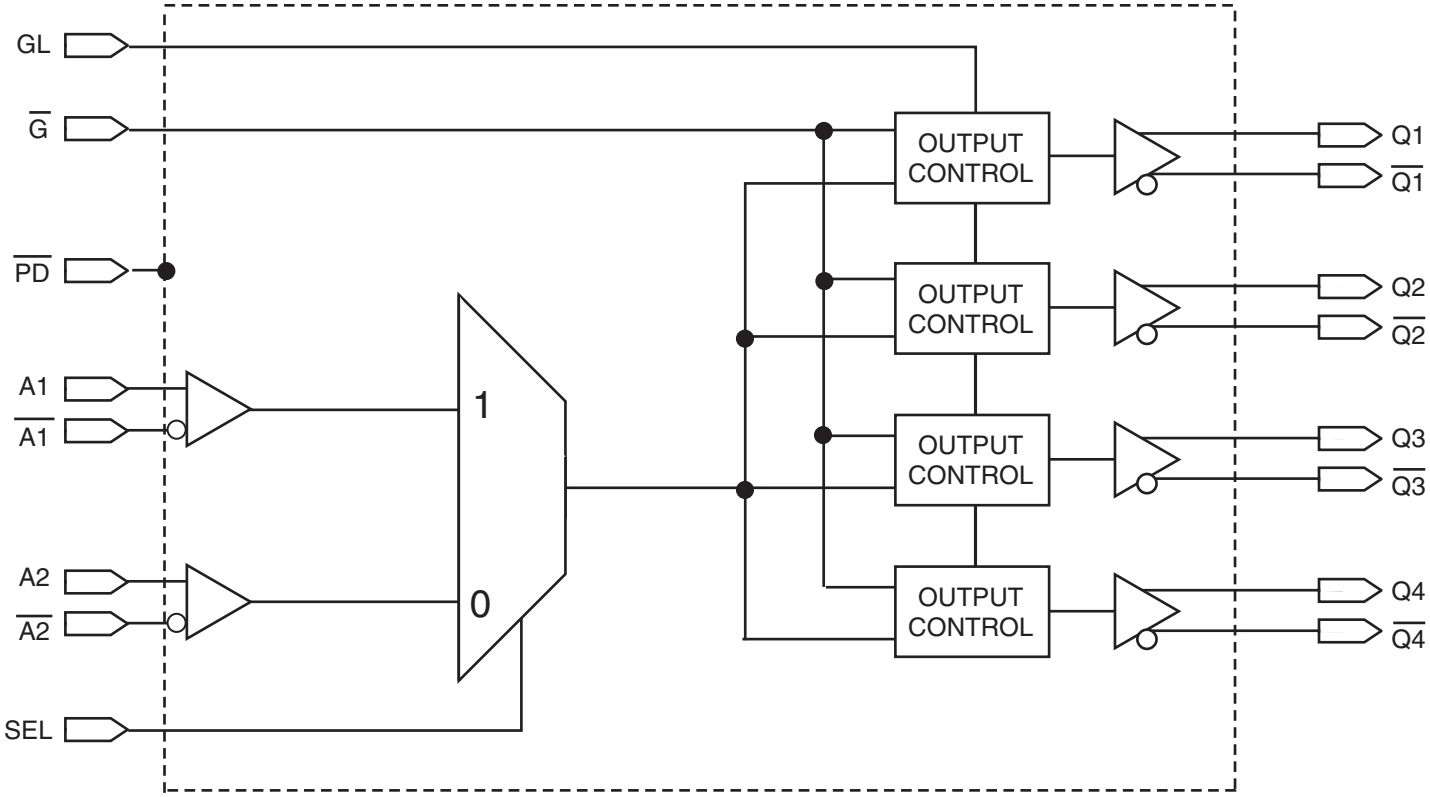

© 2019 Renesas Electronics Corporation

Table 1. Pin Descriptions

Number	Name	Type		Description
1, 12, 22	GND		Power	Power supply return for all power.
2	$\overline{PD}$	Input	LVTTL	Power-down control. Shuts off entire chip. If LOW, the device goes into low power mode. Inputs and outputs are disabled. Both Qx and $\overline{Qx}$ outputs will pull to VDD. Set HIGH for normal operation.(3)
3	RESERVED	Reserved		Reserved pin.
4, 9, 16, 21	V_{DD}		Power	Power supply for the device core and inputs.
5, 7, 18, 20	$\overline{Q1}$, $\overline{Q2}$, $\overline{Q4}$, $\overline{Q3}$	Output	LVDS	Complementary differential clock outputs.
6, 8, 17, 19	Q1, Q2, Q4, Q3	Output	LVDS	Differential clock outputs.
10	SEL	Input	LVTTL	Reference clock select. When LOW, selects A2 and $\overline{A2}$. When HIGH, selects A1 and $\overline{A1}$.
11	$\overline{G}$	Input	LVTTL	Gate control for differential outputs Q1 and $\overline{Q1}$ through Q4 and $\overline{Q4}$. When $\overline{G}$ is LOW, the differential outputs are active. When $\overline{G}$ is HIGH, the differential outputs are asynchronously driven to the level designated by GL(2).
13, 24	A1, A2	Input	Adjustable (1, 4)	Clock input. A[1:2] is the "true" side of the differential clock input.
14, 23	$\overline{A1}$, $\overline{A2}$	Input	Adjustable (1, 4)	Complementary clock inputs. $\overline{A[1:2]}$ is the complementary side of A[1:2]. For LVTTL single-ended operation, $\overline{A[1:2]}$ should be set to the desired toggle voltage for A[1:2]: 3.3V LVTTL VREF = 1650mV 2.5V LVTTL VREF = 1250mV
15	GL	Input	LVTTL	Specifies output disable level. If HIGH, Qx outputs disable HIGH and $\overline{Qx}$ outputs disable LOW. If LOW, Qx outputs disable LOW and $\overline{Qx}$ outputs disable HIGH.

NOTES:
1. Inputs are capable of translating the following interface standards:
   Single-ended 3.3V and 2.5V LVTTL levels
   Differential HSTL and eHSTL levels
   Differential LVEPECL (2.5V) and LVPECL (3.3V) levels
   Differential LVDS levels
   Differential CML levels
2. Because the gate controls are asynchronous, runt pulses are possible. It is the user's responsibility to either time the gate control signals to minimize the possibility of runt pulses or be able to tolerate them in down stream circuitry.
3. It is recommended that the outputs be disabled before entering power-down mode. It is also recommended that the outputs remain disabled until the device completes power-up after asserting $\overline{PD}$.
4. The user must take precautions with any differential input interface standard being used in order to prevent instability when there is no input signal.

Table 2. Pin Characteristics (T_A = +25°C, F = 1.0MHz)

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
C_{IN}	Input Capacitance			3		pF

NOTE: This parameter is measured at characterization but not tested.

© 2019 Renesas Electronics Corporation

Function Tables

Table 3A. Gate Control Output Table

Control Output		Outputs	
GL	$\overline{G}$	Q[1:4]	$\overline{Q[1:4]}$
0	0	Toggling	Toggling
0	1	LOW	HIGH
1	0	Toggling	Toggling
1	1	HIGH	LOW

Table 3B. Input Selection Table

Selection SEL pin	Inputs
0	A2, $\overline{A2}$
1	A1, $\overline{A1}$

Absolute Maximum Ratings

NOTE: Stresses beyond those listed under *Absolute Maximum Ratings* may cause permanent damage to the device. These ratings are stress specifications only. Functional operation of product at these conditions or any conditions beyond those listed in the *DC Characteristics or AC Characteristics* is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

Item	Rating
Power Supply Voltage, V_{DD}	-0.5V to + 3.6V
Input Voltage, V_I	-0.5V to + 3.6V
Output Voltage, V_O Not to exceed 3.6V	-0.5 to V_{DD} + 0.5V
Storage Temperature, T_{STG}	-65°C to 150°C
Junction Temperature, T_J	150°C

Recommended Operating Range

Symbol	Description	Minimum	Typical	Maximum	Units
T_A	Ambient Operating Temperature	-40	25	85	°C
V_{DD}	Internal Power Supply Voltage	2.3	2.5	2.7	V

© 2019 Renesas Electronics Corporation

DC Electrical Characteristics

Table 4A. LVDS Power Supply DC Characteristics(1), V_{DD} = 2.5V±0.2V, T_A = -40°C to 85°C

Symbol	Parameter	Test Conditions	Minimum	Typical(2)	Maximum	Units
I_{DDQ}	Quiescent V_{DD} Power Supply Current	V_{DD} = Max., All Input Clocks = LOW(2); Output enabled			240	mA
I_{TOT}	Total Power V_{DD} Supply Current	V_{DD} = 2.7V; $F_{REFERENCE}$ Clock = 450MHz			250	mA
I_{PD}	Total Power Down Supply Current	$\overline{PD}$ = LOW			5	mA

NOTE 1. These power consumption characteristics are for all the valid input interfaces and cover the worst case conditions.
NOTE 2. The true input is held LOW and the complementary input is held HIGH.

Table 4B. LVCMOS/LVTTL DC Characteristics(1), V_{DD} = 2.5V±0.2V, T_A = -40°C to 85°C

Symbol	Parameter	Test Conditions	Minimum	Typical(2)	Maximum	Units
I_{IH}	Input High Current	V_{DD} = 2.7V			±5	µA
I_{IL}	Input Low Current	V_{DD} = 2.7V			±5	µA
V_{IK}	Clamp Diode Voltage	V_{DD} = 2.3V, I_{IN} = -18mA		-0.7	-1.2	V
V_{IN}	DC Input Voltage		-0.3		3.6	V
V_{IH}	DC Input High Voltage		1.7			V
V_{IL}	DC Input Low Voltage				0.7	V
V_{THI}	DC Input Threshold Crossing Voltage			V_{DD}/2		V
V_{REF}	Single-Ended Reference Voltage (3)	3.3V LVTTL		1.65		V
		2.5V LVTTL		1.25		V

NOTE 1. See *Recommended Operating Range* table.
NOTE 2. Typical values are at V_{DD} = 2.5V, +25°C ambient.
NOTE 3. For A[1:2] single-ended operation, $\overline{A}$[1:2] is tied to a DC reference voltage.

Table 4C. Differential DC Characteristics(1), V_{DD} = 2.5V±0.2V, T_A = -40°C to 85°C

Symbol	Parameter	Test Conditions	Minimum	Typical(2)	Maximum	Units
I_{IH}	Input High Current	V_{DD} = 2.7V			±5	µA
I_{IL}	Input Low Current	V_{DD} = 2.7V			±5	µA
V_{IK}	Clamp Diode Voltage	V_{DD} = 2.3V, I_{IN} = -18mA		-0.7	-1.2	V
V_{IN}	DC Input Voltage		-0.3		3.6	V
V_{DIF}	DC Differential Voltage(3)		0.1			V
V_{CM}	DC Common Mode Input Voltage		0.05		V_{DD}	V

NOTE 1. See *Recommended Operating Range* table.
NOTE 2. Typical values are at V_{DD} = 2.5V, +25°C ambient.
NOTE 3. V_{DIF} specifies the minimum input differential voltage (V_{TR} - V_{CP}) required for switching where V_{TR} is the "true" input level and V_{CP} is the "complement" input level. The DC differential voltage must be maintained to guarantee retaining the existing HIGH or LOW input. The AC differential voltage must be achieved to guarantee switching to a new state.
NOTE 4. V_{CM} specifies the maximum allowable range of (V_{TR} + V_{CP}) /2.

© 2019 Renesas Electronics Corporation

Table 4D. LVDS DC Characteristics(1), V_{DD} = 2.5V±0.2V, T_A = -40°C to 85°C

Symbol	Parameter	Test Conditions	Minimum	Typical(2)	Maximum	Units
$V_{OT(+)}$	Differential Output Voltage for the True Binary State		247		454	mV
$V_{OT(–)}$	Differential Output Voltage for the False Binary State		247		454	mV
ΔV_{OT}	Change in V_{OT} Between Complementary Output States				50	mV
V_{OS}	Output Common Mode Voltage (Offset Voltage)		1.125	1.2	1.375	V
ΔV_{OS}	Change in V_{OS} Between Complementary Output States				50	mV
I_{OS}	Outputs Short Circuit Current	V_{OUT+} and $V_{OUT–}$ = 0V		12	24	mA
I_{OSD}	Differential Outputs Short Circuit Current	$V_{OUT+} = V_{OUT–}$		6	12	mA

NOTE 1. See *Recommended Operating Range* table.
NOTE 2. Typical values are at V_{DD} = 2.5V, +25°C ambient.

AC Electrical Characteristics

Table 5A. HSTL Differential Input AC Characteristics, V_{DD} = 2.5V±0.2V, T_A = -40°C to 85°C

Symbol	Parameter	Value	Units
V_{DIF}	Input Signal Swing(1)	1	V
V_X	Differential Input Signal Crossing Point(2)	750	mV
D_H	Duty Cycle	50	%
V_{THI}	Input Timing Measurement Reference Level(3)	Crossing Point	V
t_R / t_F	Input Signal Edge Rate(4)	2	V/ns

NOTE 1. The 1V peak-to-peak input pulse level is specified to allow consistent, repeatable results in an automatic test equipment (ATE) environment. This device meets the VDIF (AC) specification under actual use conditions.
NOTE 2. A 750mV crossing point level is specified to allow consistent, repeatable results in an automatic test equipment (ATE) environment. This device meets the VX specification under actual use conditions.
NOTE 3. In all cases, input waveform timing is marked at the differential cross-point of the input signals.
NOTE 4. The input signal edge rate of 2V/ns or greater is to be maintained in the 20% to 80% range of the input waveform.

Table 5B. eHSTL AC Differential Input Characteristics, V_{DD} = 2.5V±0.2V, T_A = -40°C to 85°C

Symbol	Parameter	Value	Units
V_{DIF}	Input Signal Swing(1)	1	V
V_X	Differential Input Signal Crossing Point(2)	900	mV
D_H	Duty Cycle	50	%
V_{THI}	Input Timing Measurement Reference Level(3)	Crossing Point	V
t_R / t_F	Input Signal Edge Rate(4)	2	V/ns

NOTE 1. The 1V peak-to-peak input pulse level is specified to allow consistent, repeatable results in an automatic test equipment (ATE) environment. This device meets the VDIF (AC) specification under actual use conditions.
NOTE 2. A 900mV crossing point level is specified to allow consistent, repeatable results in an automatic test equipment (ATE) environment. This device meets the VX specification under actual use conditions.
NOTE 3. In all cases, input waveform timing is marked at the differential cross-point of the input signals.
NOTE 4. The input signal edge rate of 2V/ns or greater is to be maintained in the 20% to 80% range of the input waveform.

© 2019 Renesas Electronics Corporation

Table 5C. LVEPECL (2.5V) and LVPECL (3.3V) Differential Input AC Characteristics, V_{DD} = 2.5V±0.2V, T_A = -40°C to 85°C

Symbol	Parameter		Maximum	Units
V_{DIF}	Input Signal Swing(1)		732	mV
V_X	Differential Input Cross Point Voltage(2)	LVEPECL	1082	mV
		LVPECL	1880	mV
D_H	Duty Cycle		50	%
V_{THI}	Input Timing Measurement Reference Level(3)		Crossing Point	V
t_R / t_F	Input Signal Edge Rate(4)		2	V/ns

NOTE 1. The 732mV peak-to-peak input pulse level is specified to allow consistent, repeatable results in an automatic test equipment (ATE) environment. This device meets the VDIF (AC) specification under actual use conditions.
NOTE 2. A 1082mV LVEPECL (2.5V) and 1880mV LVPECL (3.3V) crossing point level is specified to allow consistent, repeatable results in an automatic test equipment (ATE) environment. This device meets the Vx specification under actual use conditions.
NOTE 3. In all cases, input waveform timing is marked at the differential cross-point of the input signals.
NOTE 4. The input signal edge rate of 2V/ns or greater is to be maintained in the 20% to 80% range of the input waveform.

Table 5D. LVDS Differential Input AC Characteristics, T_A = -40°C to 85°C

Symbol	Parameter	Maximum	Units
V_{DIF}	Input Signal Swing(1)	400	mV
V_X	Differential Input Cross Point Voltage(2)	1.2	V
D_H	Duty Cycle	50	%
V_{THI}	Input Timing Measurement Reference Level(3)	Crossing Point	V
t_R / t_F	Input Signal Edge Rate(4)	2	V/ns

NOTE 1. The 400mV peak-to-peak input pulse level is specified to allow consistent, repeatable results in an automatic test equipment (ATE) environment. This device meets the VDIF (AC) specification under actual use conditions.
NOTE 2. A 1.2V crossing point level is specified to allow consistent, repeatable results in an automatic test equipment (ATE) environment. This device meets the Vx specification under actual use conditions.
NOTE 3. In all cases, input waveform timing is marked at the differential cross-point of the input signals.
NOTE 4. The input signal edge rate of 2V/ns or greater is to be maintained in the 20% to 80% range of the input waveform.

Table 5E. AC Differential Input Characteristics(1), V_{DD} = 2.5V±0.2V, T_A = -40°C to 85°C

Symbol	Parameter	Minimum	Typical	Maximum	Units
V_{DIF}	AC Differential Voltage(2)	0.1		3.6	V
V_X	Differential Input Cross Point Voltage	0.05		V_{DD}	V
V_{CM}	Common Mode Input Voltage Range(3)	0.05		V_{DD}	V
V_{IN}	Input Voltage	-0.3		3.6	V

NOTE 1. The output will not change state until the inputs have crossed and the minimum differential voltage range defined by V_{DIF} has been met or exceeded.
NOTE 2. V_{DIF} specifies the minimum input voltage (V_{TR} – V_{CP}) required for switching where V_{TR} is the “true” input level and V_{CP} is the “complement” input level. The AC differential voltage must be achieved to guarantee switching to a new state.
NOTE 3. V_{CM} specified the maximum allowable range of (V_{TR} + V_{CP}) /2.

© 2019 Renesas Electronics Corporation

Table 5F. AC Characteristics[1,5], V_{DD} = 2.5V±0.2V, T_A = -40°C to 85°C

Symbol	Parameter	Test Conditions	Minimum	Typical	Maximum	Units
*t*sk(o)	Same Device Output Pin-to-Pin Skew [2]				50	ps
*t*sk(p)	Pulse Skew[3]				125	ps
*t*sk(pp)	Part-to-Part Skew[4]				300	ps
tp_{LH}	Propagation Delay, Low-to-High	A Crosspoint to Qn, $\overline{Qn}$ Crosspoint		1.7	1.9	ns
tp_{HL}	Propagation Delay, High-to-Low			1.7	1.9	ns
fo	Frequency Range[6]				450	MHz
t_{PGE}	Output Gate Enable Crossing VTHI-to-Qn/$\overline{Qn}$ Crosspoint				3.5	ns
t_{PGD}	Output Gate Enable Crossing VTHI-to-Qn/$\overline{Qn}$ Crosspoint Driven to Designated Level				3.5	ns
t_{PWRDN}	PD Crossing V_{THI}-to-Qn = V_{DD}, $\overline{Qn}$ = V_{DD}				100	µS
t_{PWRUP}	Output Gate Disable Crossing V_{THI} to Qn/$\overline{Qn}$ Driven to Designated Level				100	µS
t_R / t_F	Output Rise/Fall Time[6]	20% to 80%	125		700	ps

NOTE. Electrical parameters are guaranteed over the specified ambient operating temperature range, which is established when the device is mounted in a test socket with maintained transverse airflow greater than 500 lfpm. The device will meet specifications after thermal equilibrium has been reached under these conditions.
NOTE 1. AC propagation measurements should not be taken within the first 100 cycles of startup.
NOTE 2. Skew measured between Crosspoint of all differential output pairs under identical input and output interfaces, transitions and load conditions on any one device.
NOTE 3. Skew measured is the difference between propagation delay times tp_{HL} and tp_{LH} of any differential output pair under identical input and output interfaces, transitions and load conditions on any one device.
NOTE 4. Skew measured is the magnitude of the difference in propagation times between any single differential output pair of two devices, given identical transitions and load conditions at identical VDD levels and temperature.
NOTE 5. All parameters are tested with a 50% input duty cycle.
NOTE 6. Guaranteed by design but not production tested.

© 2019 Renesas Electronics Corporation

Applications Information

EPAD Thermal Release Path

In order to maximize both the removal of heat from the package and the electrical performance, a land pattern must be incorporated on the Printed Circuit Board (PCB) within the footprint of the package corresponding to the exposed metal pad or exposed heat slug on the package, as shown in *Figure 1.* The solderable area on the PCB, as defined by the solder mask, should be at least the same size/shape as the exposed pad/slug area on the package to maximize the thermal/electrical performance. Sufficient clearance should be designed on the PCB between the outer edges of the land pattern and the inner edges of pad pattern for the leads to avoid any shorts.

While the land pattern on the PCB provides a means of heat transfer and electrical grounding from the package to the board through a solder joint, thermal vias are necessary to effectively conduct from the surface of the PCB to the ground plane(s). The land pattern must be connected to ground through these vias. The vias act as “heat pipes”. The number of vias (i.e. “heat pipes”) are application specific and dependent upon the package power dissipation as well as electrical conductivity requirements. Thus, thermal and electrical analysis and/or testing are recommended to determine the minimum number needed. Maximum thermal and electrical performance is achieved when an array of vias is incorporated in the land pattern. It is recommended to use as many vias connected to ground as possible. It is also recommended that the via diameter should be 12 to 13mils (0.30 to 0.33mm) with 1oz copper via barrel plating. This is desirable to avoid any solder wicking inside the via during the soldering process which may result in voids in solder between the exposed pad/slug and the thermal land. Precautions should be taken to eliminate any solder voids between the exposed heat slug and the land pattern. Note: These recommendations are to be used as a guideline only. For further information, refer to the Application Note on the *Surface Mount Assembly* of Amkor’s Thermally/Electrically Enhance Leadframe Base Package, Amkor Technology.


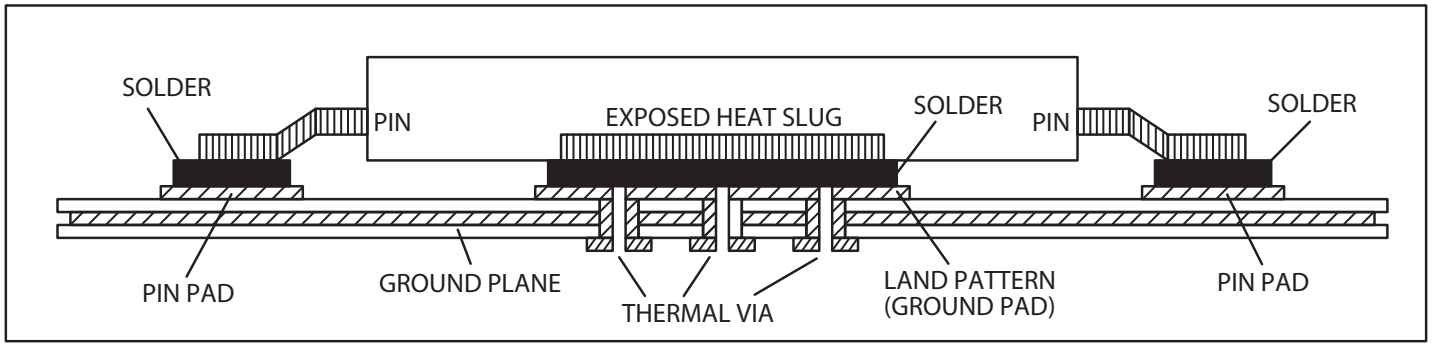


Figure 1. Assembly for Exposed Pad Thermal Release Path - Side View (drawing not to scale)

© 2019 Renesas Electronics Corporation


Differential AC Timing Waveforms

Output Propagation and Skew Waveforms

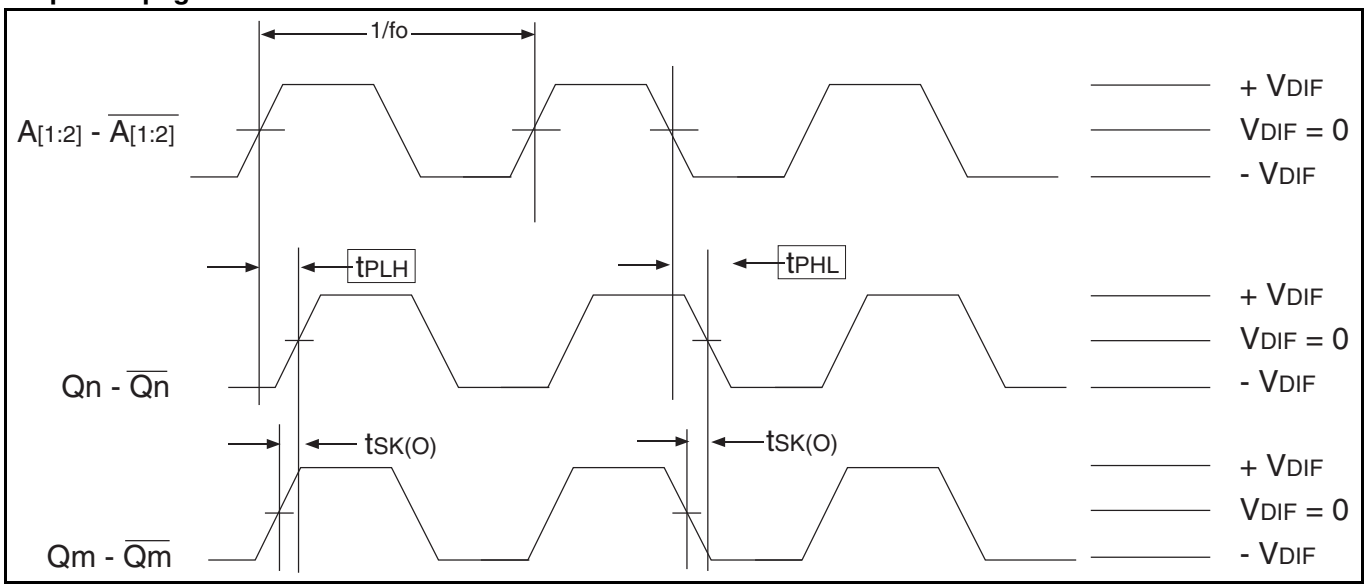

NOTE 1: Pulse skew is calculated using the following expression:
$t_{sk(p)} = |tp_{HL} - tp_{LH}|$
Note that the tp_{HL} and tp_{LH} shown above ae not valid measurements for this calculation because they are not taken from the same pulse.
NOTE 2: AC propagation measurements should not be taken within the first 100 cycles of startup.


Differential Gate Disabled/Endable Showing Runt Pulse Generation

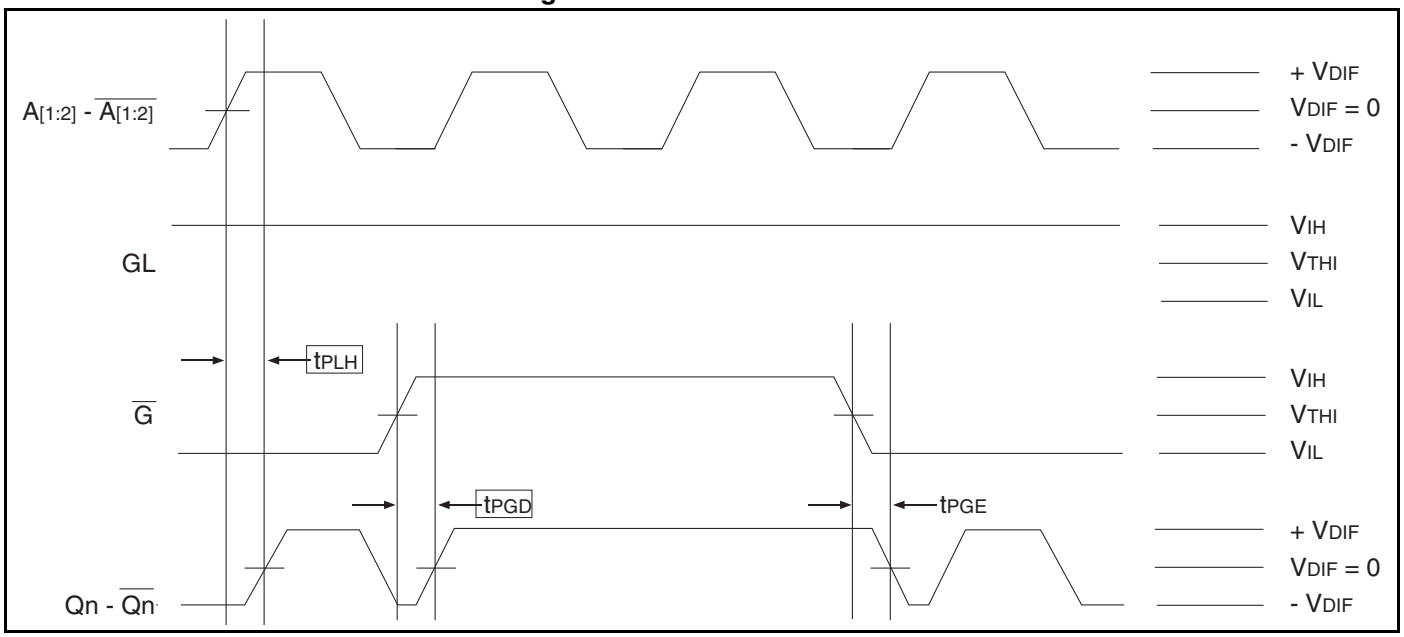

NOTE 1: As shown, it is possible to generate runt pulses on gate disable and enable of the outputs. It is the user's responsibility to time the $\overline{G}$ signal to avoid this problem.

© 2019 Renesas Electronics Corporation

Power Down Timing

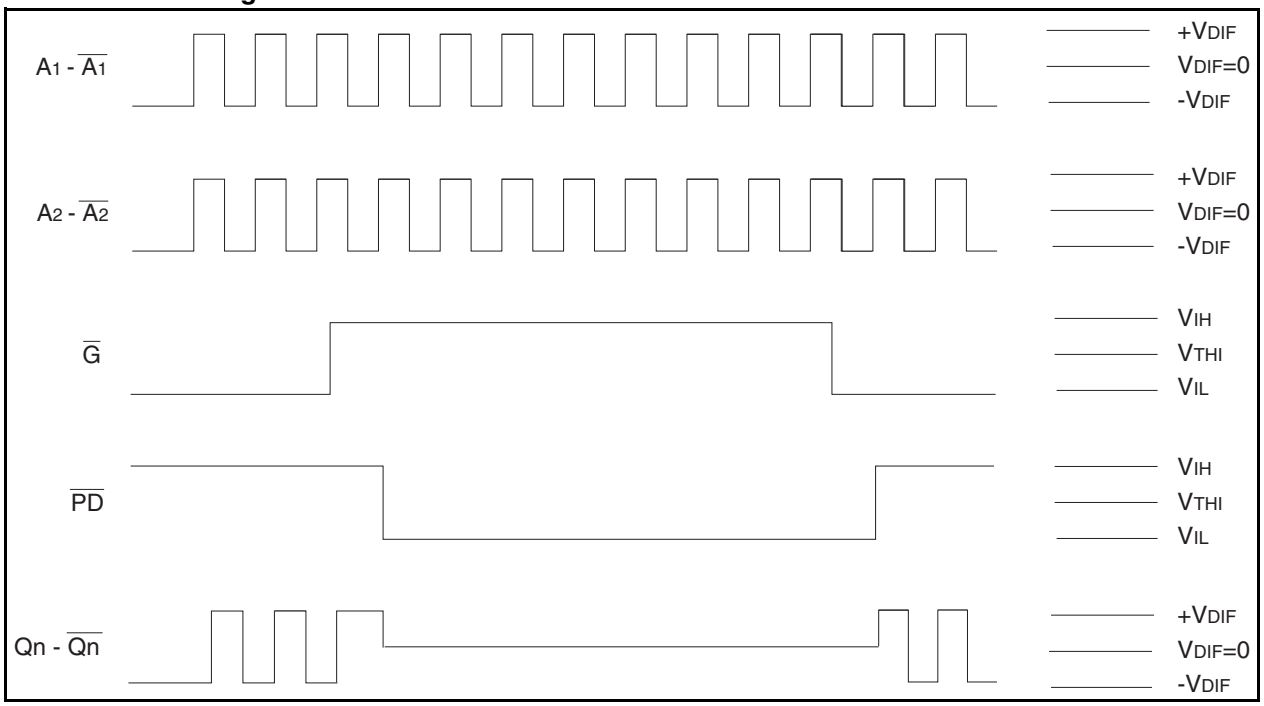

NOTE 1: It is recommended that outputs be disabled before entering power-down mode. It is also recommended that the outputs remain disabled until the device completes power-up after asserting $\overline{PD}$.
NOTE 2: The *Power Down Timing* diagram assumes that GL is HIGH.
NOTE 3: It should be noted that during power-down mode, the outputs are both pulled to V_{DD}. In the *Power Down Timing* diagram this is shown when Qn/$\overline{Qn}$ goes to V_{DIF} = 0.

© 2019 Renesas Electronics Corporation

Test Circuit for Differential Input


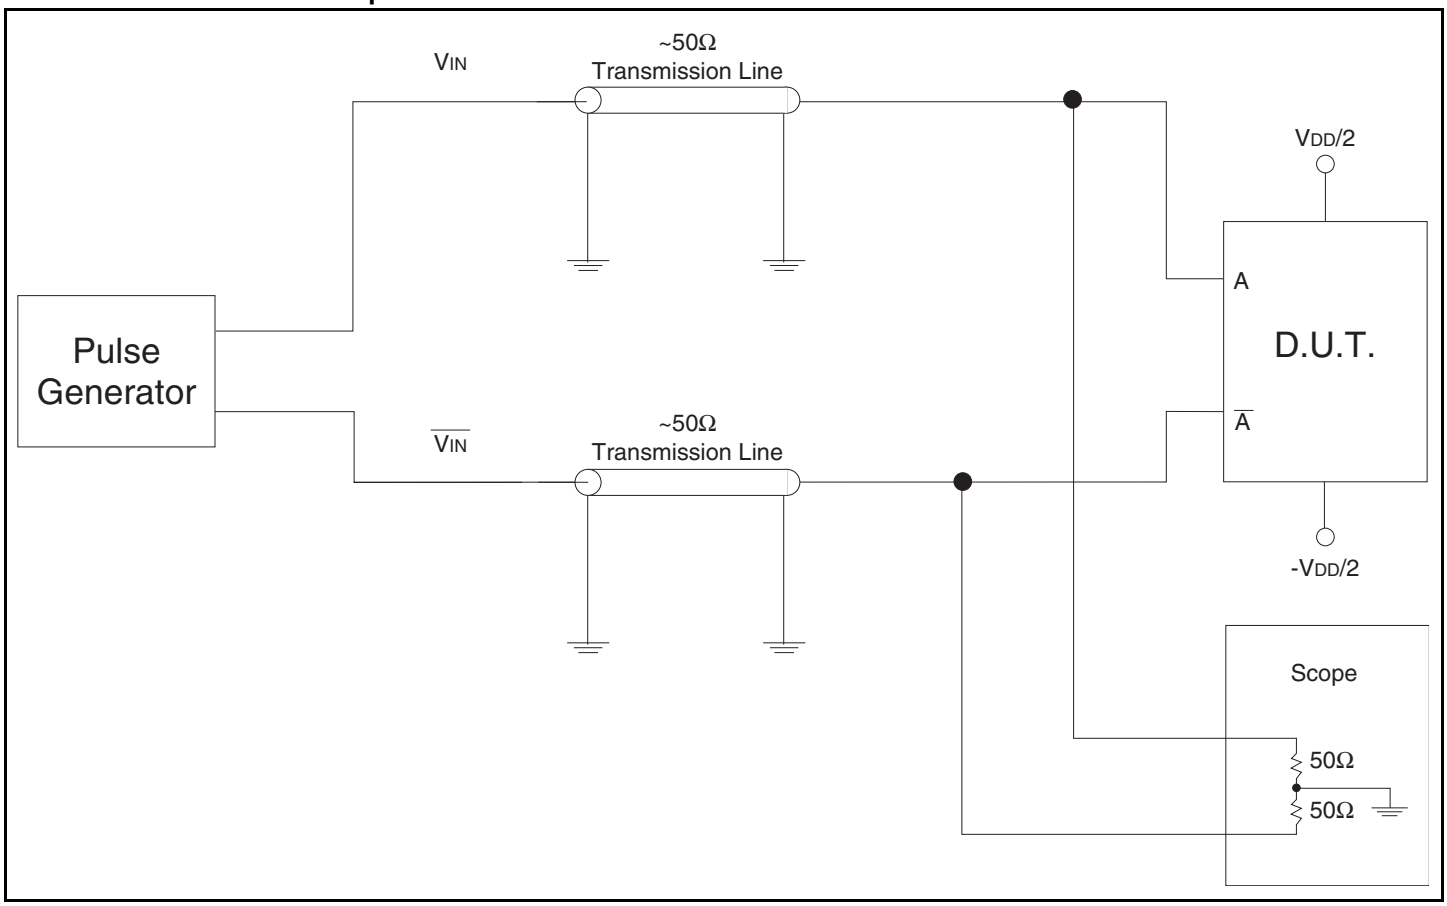


Table 6A. Differential Input Test Conditions

Symbol	V_{DD} = 2.5V ± 0.2V	Unit
V_{THI}	Crossing of A and $\overline{A}$	V

© 2019 Renesas Electronics Corporation

Test Circuit for DC Outputs and Power Down Tests

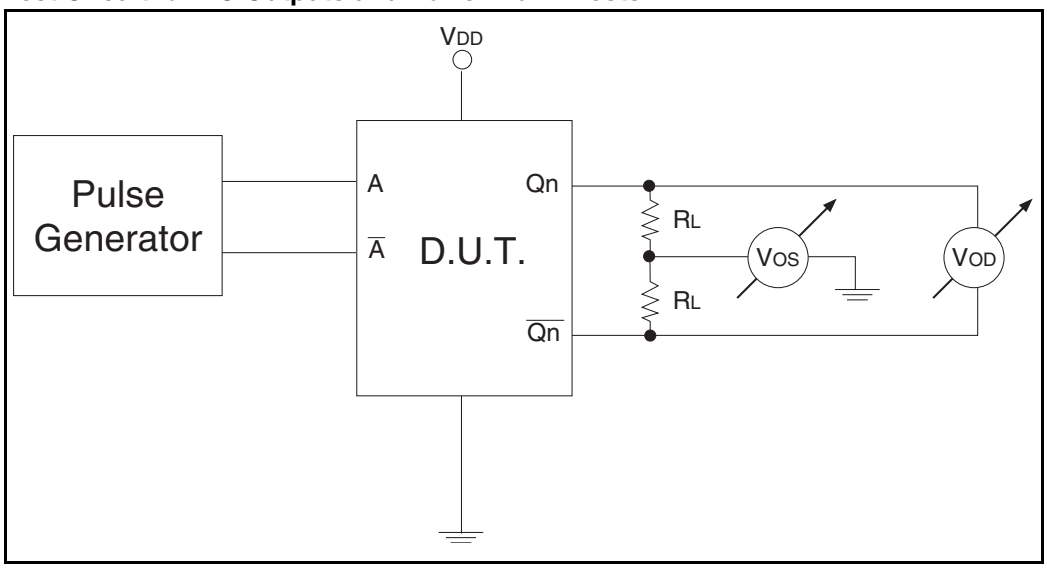

Test Circuit for Propagation, Skew, and Gate Enable/Disable Timing

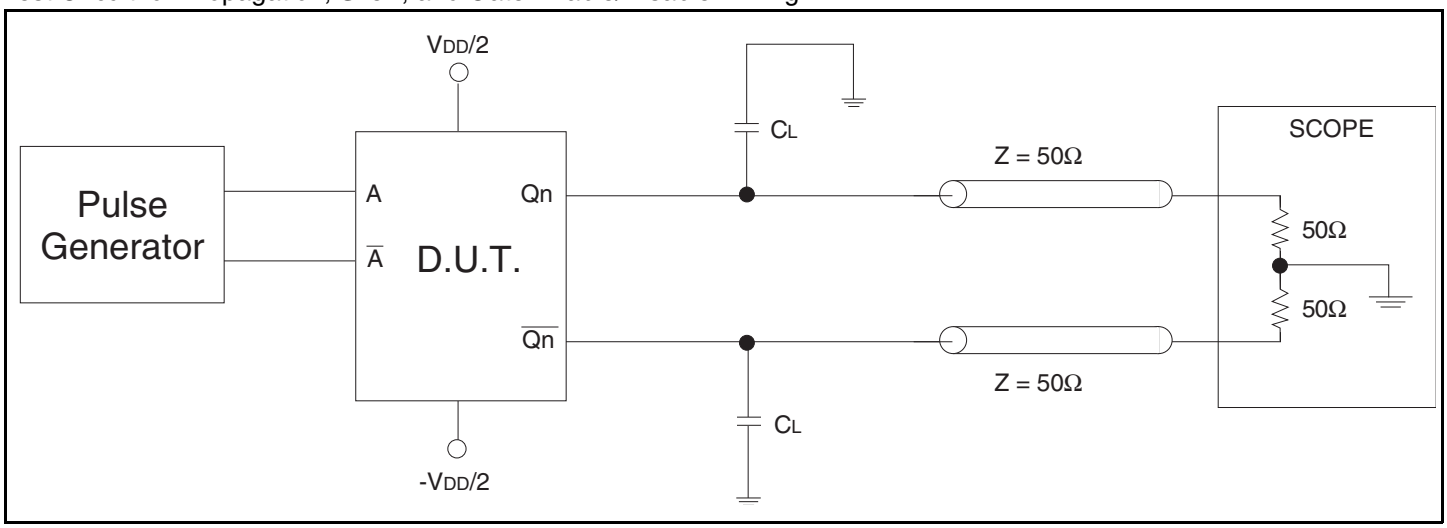


Table 6B. Differential Input Test Conditions


Symbol	V_{DD} = 2.5V ± 0.2V	Unit
C_L	0(1)	pF
	8(1,2)	pF
R_L	50	Ω


NOTE 1: Specifications only apply to “Normal Operations” test condition. The T_{IA}/E_{IA} specification load is for reference only.
NOTE 2: The scope inputs are assumed to have a 2pF load to ground. T_{IA}/E_{IA} – 644 specifies 5pF between the output pair. With C_L = 8pF, this gives the test circuit appropriate 5pF equivalent load.


© 2019 Renesas Electronics Corporation


Package Outline and Package Dimensions


Package Outline - G Suffix for 24 Lead TSSOP, E-Pad

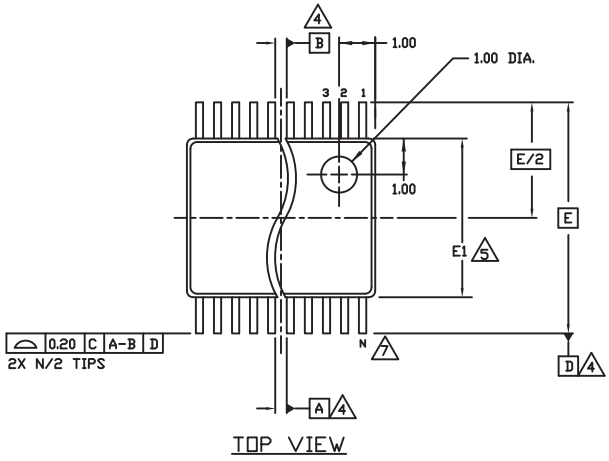


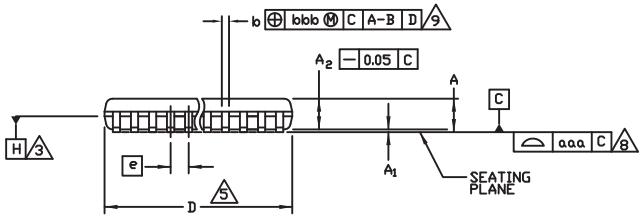


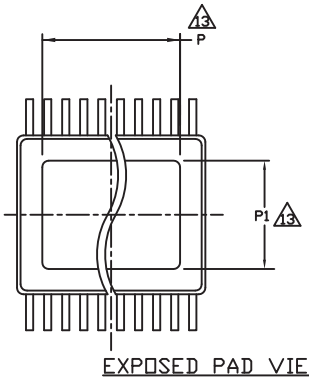





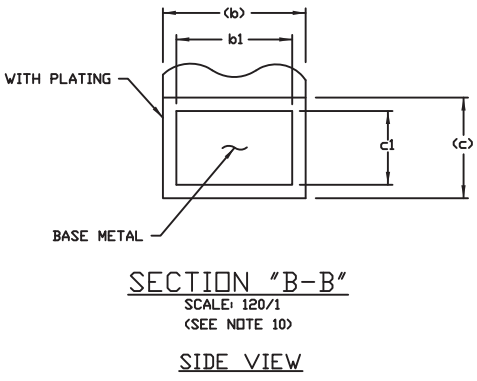

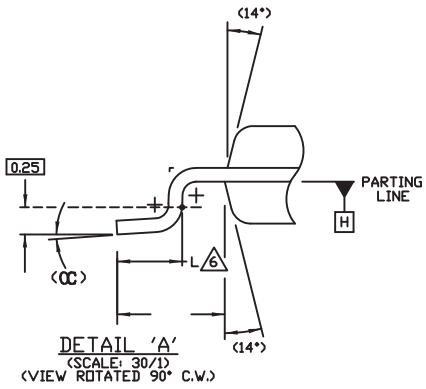





Table 6. Package Dimensions

All Dimensions in Millimeters			
Symbol	**Minimum**	**Nominal**	**Maximum**
N		24	
A			1.10
A1	0.05		0.15
A2	0.85	0.90	0.95
b	0.19		0.30
b1	0.19	0.22	0.25
c	0.09		0.20
c1	0.09	0.127	0.16
D	7.70		7.90
E		6.40 Basic	
E1	4.30	4.40	4.50
e		0.65 Basic	
L	0.50	0.60	0.70
P	5.0		5.5
P1	3.0		3.2
α	0°		8°
ααα		0.076	
bbb		0.10	

© 2019 Renesas Electronics Corporation

Ordering Information

Table 8. Ordering Information

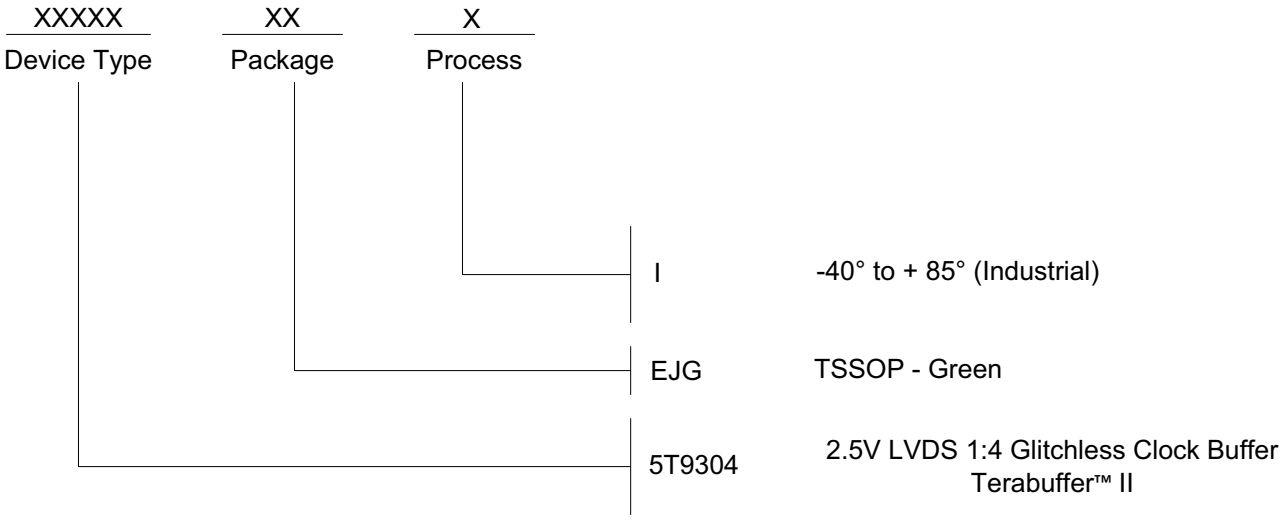

© 2019 Renesas Electronics Corporation

Revision History Sheet

Rev	Table	Page	Description of Change	Date
A		9	Added EPAD Thermal Release Path section.	3/12/10
B	T5F	8	AC Characteristics Table - per PCN660, changed both Propagation Delay specs from 1.25ns typical to 1.7ns and 1.75ns maximum to 1.9ns.	7/31/2012
B	8	15	Removed IDT from the Ordering Information	9/21/12
B		1	Not Recommended For New Designs	5/15/13
B	T8	15	Ordering Information - removed leaded device per PDN N-13-11 Updated data sheet format	3/10/15
B			Removed NRND from data sheet.	5/13/15

© 2019 Renesas Electronics Corporation

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2020 Renesas Electronics Corporation. All rights reserved.