



EVENT 120C

100W RGBL LED fresnel zoom

Event 120C is a portable LED fresnel and powered by 250W RGBL LED. Featuring 25°-60° zoom, even color mixing, It deliver a smooth, soft flat field of light. Barn door included for the shape of the light.

Key features:


- 250W RGBL LED (55W R+65W G+65W B+65W L)
- RGBL flat and even color mixing
- 25-60° manual zoom
- Smooth dimming, flicker free
- Super compact, easy for set up
- key, DMX control of dimmer
- DMX-RDM compliant, 4 dimmer modes
- 4-leaf rotatable barndoor included
- Track mount version selectable

Application:


- Broadcast, HD studio
- Theatre, church
- Film shooting
- Museum
- Exhibition lighting





Accessories:



Barn door




Gel frame

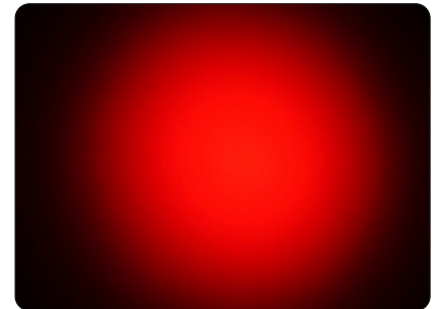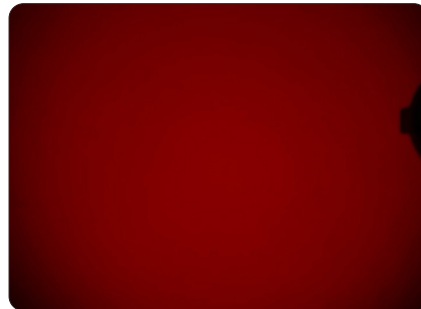


Photometric

R(lx)	1360	598	362	229	148
G(lx)	3310	1470	878	565	368
B(lx)	500	222	131	83.8	53.8
W(lx)	2690	1180	676	427	277
Full on(lx)	1800	797	477	304	197

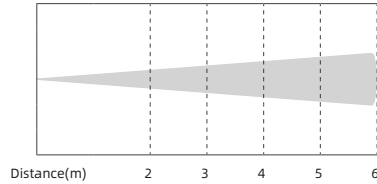


Minimum Spot - 25°

R(lx)	223	98.8	60.9	39.9	25.9
G(lx)	541	246	154	101	68.7
B(lx)	81.4	36.5	22.8	15.8	9.9
W(lx)	406	183	115	75.8	50.7
Full on(lx)	285	129	80.6	53	36.1

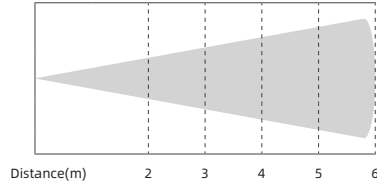


Maximum Spot - 60°

R(lx)	3700	903	450	244	170
G(lx)	9990	2500	1230	700	470
B(lx)	2580	607	321	180	118
L(lx)	13200	3150	1650	915	585
Full on(lx)	8230	2050	1010	540	385

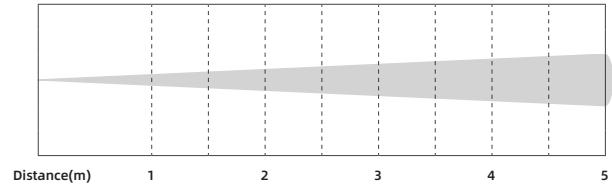

Minimum Spot - 25°

R(lx)	612	142	73	38	28
G(lx)	1630	403	212	116	81
B(lx)	430	104	52	29	20
L(lx)	2010	479	230	146	95
Full on(lx)	1300	301	166	127	64

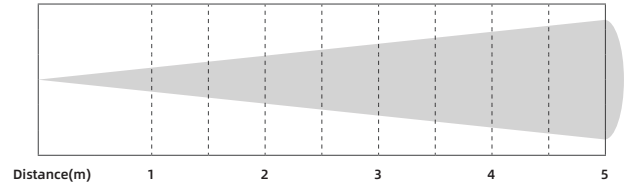

Maximum Spot - 60°

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	250W LED (55W R+65W G+65W B+65W L)
Color :	RGBL/RGBW
Zoom range:	25° - 60° manual zoom
Power connection:	PowerCON in & out
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	ARC.1(3CH), AR1.D(4CH), ARC.2(4CH), AR2.D(5CH), AR2.S(6CH), HSV(3CH), STAG(11CH)
Control mode:	Knob, DMX and RDM controls

Dimmer speed:	4 grade
Housing:	Colour black, Aluminum
Size:	212 x 165 x 262mm(8.4 x 6.5 x 10.3in)
N.W.:	2.2kg(barn door included)
G.W.:	2.8kg
Accessories(incl.):	Power cable, barn door, gel frame, safety rope
Accessories(opt.):	Clamp
Environment:	IP20