



Reborn 1000C is a RGBV LED retrofit for Source 4 profile spot. Upgrade your source 4 profile in just seconds. Featuring 1000W RGBV four color LED source, each color with 250Watt, even and flat color mixing, high CRI, low power consumption. RDM function, long life LED, LCD display, XLR in & out, 100-240V worldwide voltage.


Key features:

- 1000W RGBV LED(V=WW), each color 250Watt
- High power LED, bright output
- Even and flat color mixing
- Color temperature 3200K - 5600K adjustable
- 3-pin XLR in & out signal connection
- High CRI, TLCI
- Studio mode for super silent operation
- Wide voltage range 100-240V
- Dimmer frequency 1.20-24.00KHz adjustable
- Smooth dimming, video flicker free
- LCD display, user friendly interface
- Easy to setup, seconds to upgrade
- Intelligent temperature control, silent operation

Application:


- Broadcast, HD studio
- Theatre, church
- Museum

REBORN 1000C
Source 4 LED retrofits RGBV

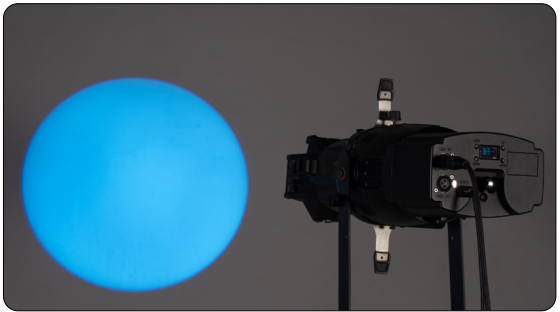


Photometric

R(lx)	4990	1400	372	179	82	50	32	21	18	13
G(lx)	6630	1930	789	445	294	192	138	105	83	72
B(lx)	1180	307	126	73	46	32	24	18	14	12
V(lx)	9830	2510	1040	532	353	228	172	122	95	83
Full on(lx)	5300	1470	602	309	205	136	98	71	57	48

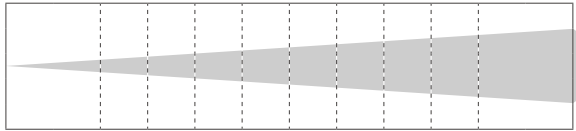


Distance(m)	1	2	3	4	5	6	7	8	9	10
Spot Diam(m)	0.87	1.31	1.74	2.18	2.61	3.05	3.48	3.92	4.35	

26°

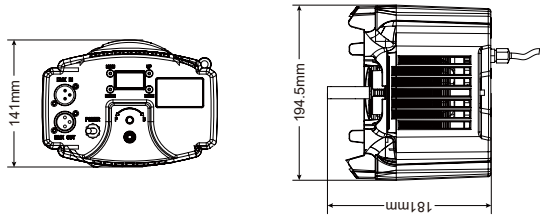

Color Rendition

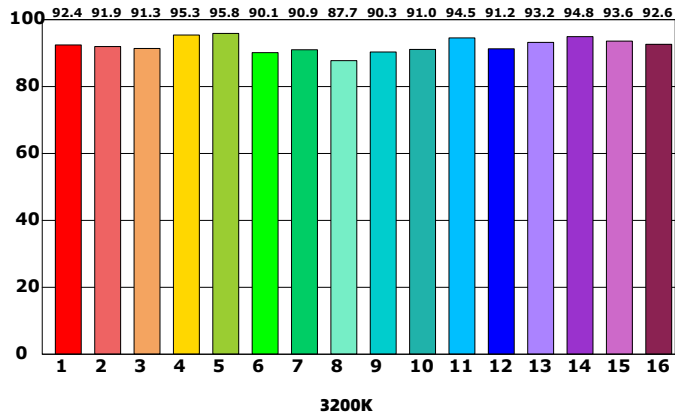

Technical Data

Power supply:	AC100-240V, 50/60Hz
Light source:	1000W RGBV LED
Color temperature:	3200K- 5600K tunable
Power connection:	Dedicated power in
Signal connection:	3-pin XLR in & out(5-pin optional)
Control channels:	2/4/6/10
Dimmer frequency:	1.20-24.00KHz adjustable
Dimmer curves:	Standard, Stage, TV, Architecture, Theatre, Studio(fan mode), Custom
Control mode:	DMX, RDM
Housing:	Color black, Die-cast aluminum
Size:	195 x 141 x186 mm
N.W.:	3 kg
Accessories(incl.):	Power cable, Safety cable, fix bolt
Environment:	IP20

