



光谱图

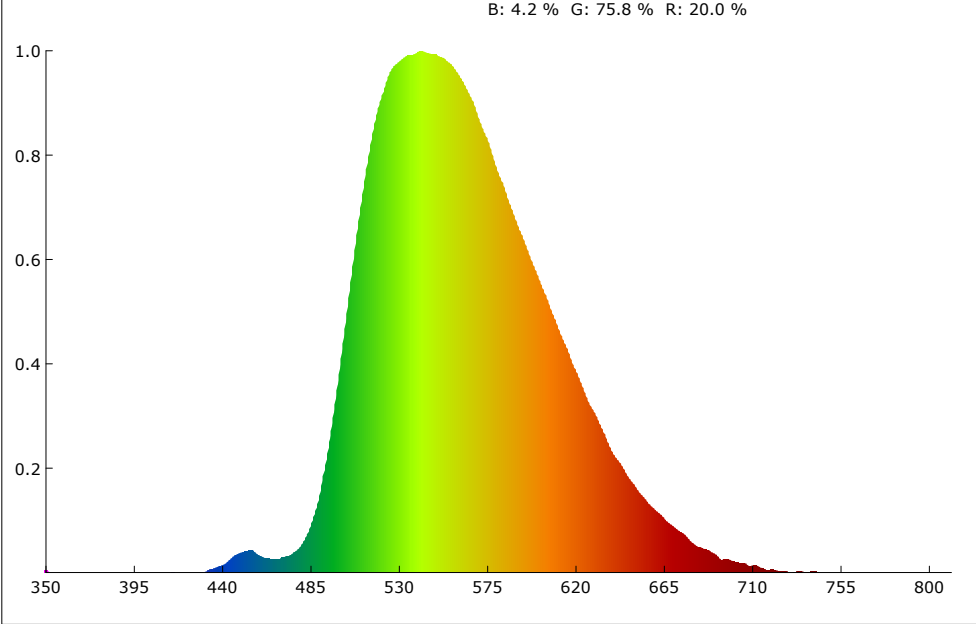

SDCM

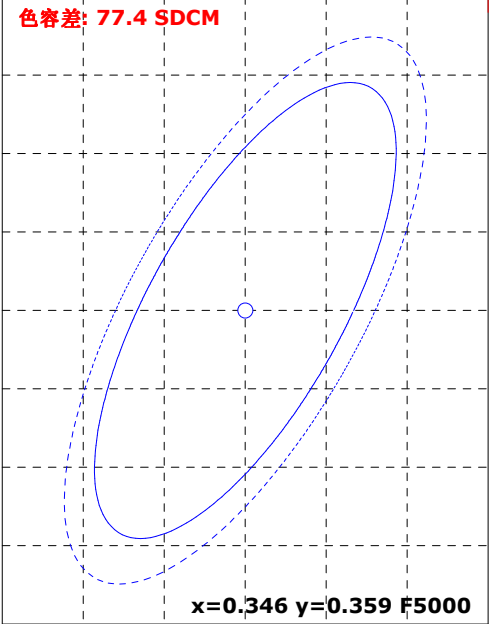

颜色参数:

坐标x: 0.3915 坐标y: 0.5615 坐标u: 0.1749 坐标v: 0.3762 坐标u': 0.1749 坐标v': 0.5643
红色比: 20.0 % 绿色比: 75.8 % 蓝色比: 4.2 % 光通量红色比: 8.9 % 光通量绿色比: 90.8 % 光通量蓝色比: 0.3 %

显色指数: 37.1 AvgR: 22.6
R1: 35.0 R2: 49.3 R3: 52.0 R4: 11.8 R5: 36.2 R6: 46.5 R7: 49.8 R8: 16.6
R9: -99.0 R10: 0.2 R11: -6.4 R12: 16.4 R13: 36.2 R14: 77.1 R15: 17.5


色温: 4560 K 光通量: 236.694 lm 峰值波长: 542.4 nm 色容差: 77.4
明暗视觉比: 1.5 中心波长: 555.7 nm 主波长: 563.9 nm 质心波长: 563.0 nm
半宽度: 104.1 nm 色偏差: 0.06383 色纯度: 86.4 % 色质指数: 31.0
LER(TM-30): 483.8 辐射功率: 489.2 mw 色域指数(Rg): 45.8 逼真度(Rf): 39.2
红光辐射功率: 97.7 mw 近红辐射功率: 1.5 mw 远红辐射功率: 0.0 mw

电参数:




光效: 11.2 Lm/W 能效: 12.2 能效等级: G
电压: 220.7 V 电流: 0.175 A 功率: 21.170 W 功率因素: 0.546

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:


Rf: 39.2 CCT: 4560K u': 0.1749
Rg: 45.8 LER: 483.8 Duv: 0.06383 v': 0.5643

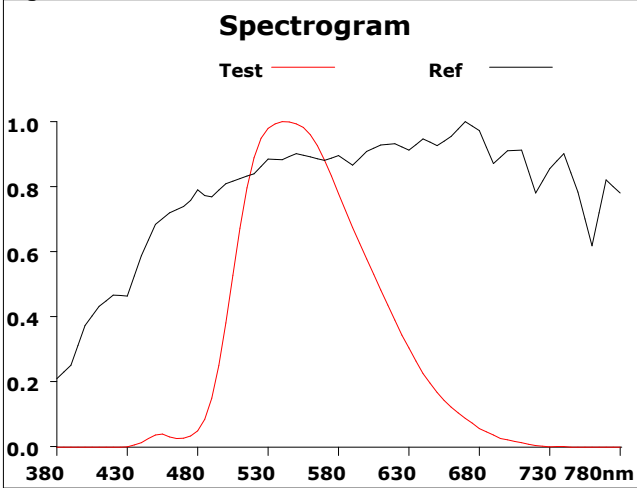


500			
Hue Bin	Rf	Chroma	Hue
1	38.0	-30.8%	1.8%
2	46.7	-24.4%	-5.0%
3	27.4	-33.8%	-10.6%
4	26.9	-40.9%	-10.4%
5	29.8	-51.5%	2.8%
6	17.1	-51.4%	17.3%
7	13.8	-43.6%	32.5%
8	27.0	-31.1%	26.8%
9	45.1	-22.1%	29.6%
10	49.5	-16.1%	25.6%
11	67.1	-14.9%	7.7%
12	58.6	-20.8%	-3.1%
13	59.4	-25.3%	-14.0%
14	45.9	-27.2%	-4.8%
15	50.2	-29.2%	-8.0%
16	38.0	-29.6%	2.7%

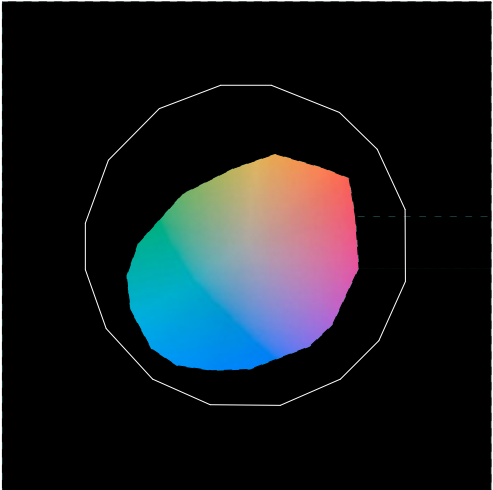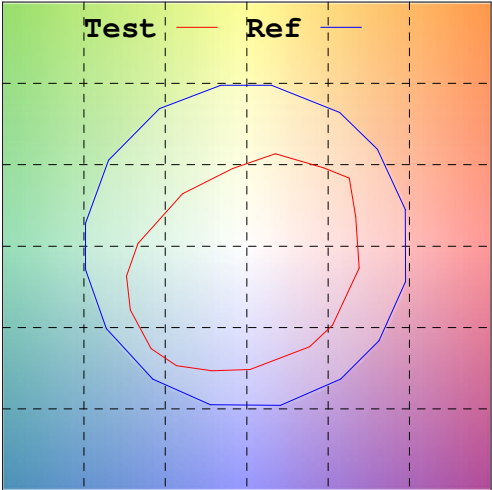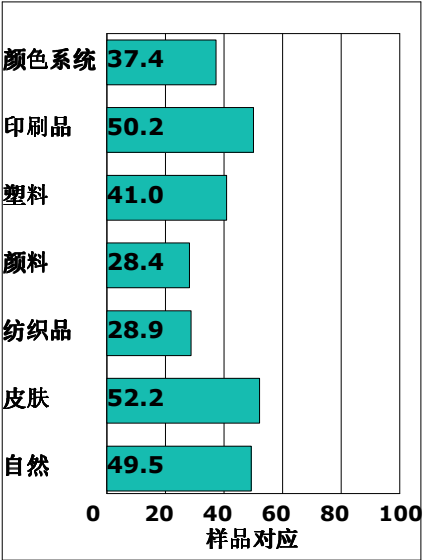

Rf by Bue

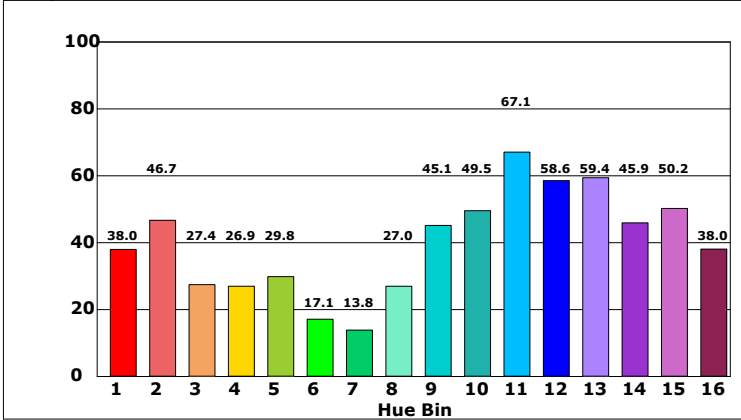

Chroma by Bue

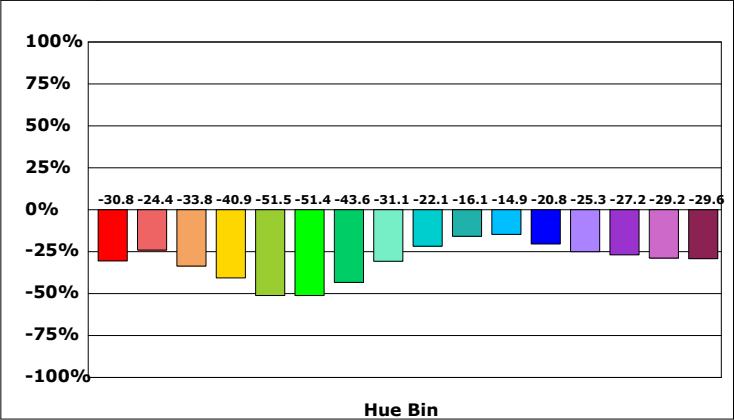

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/31/13

