



光谱图

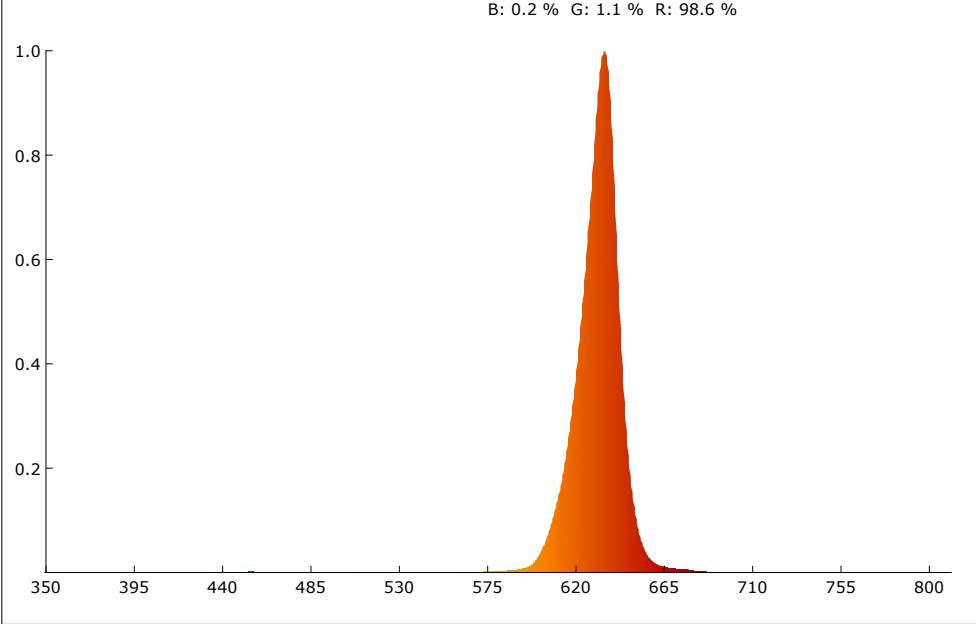

SDCM

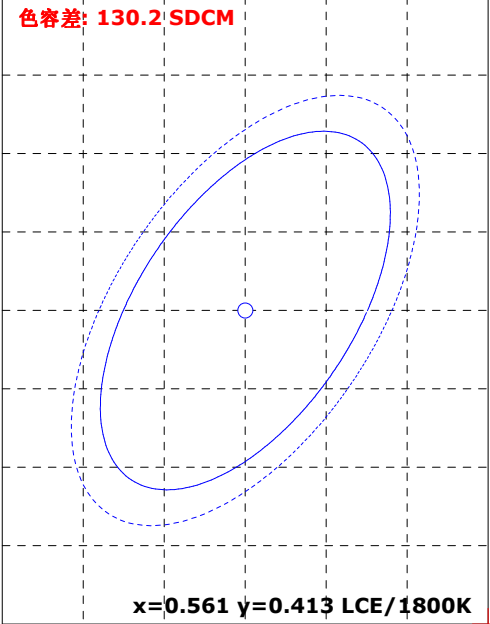

颜色参数:

坐标x: 0.6954 坐标y: 0.3006 坐标u: 0.5332 坐标v: 0.3458 坐标u': 0.5332 坐标v': 0.5187
红色比: 98.6 % 绿色比: 1.1 % 蓝色比: 0.2 % 光通量红色比: 96.3 % 光通量绿色比: 3.7 % 光通量蓝色比: 0.0 %

显色指数: 26.3 AvgR: 24.2
R1: 18.2 R2: 82.0 R3: 42.9 R4: -0.6 R5: 23.2 R6: 93.5 R7: 9.6 R8: -58.2
R9: -99.0 R10: 77.7 R11: 19.6 R12: 68.7 R13: 40.2 R14: 67.6 R15: -23.1


色温: 1000 K 光通量: 51.740 lm 峰值波长: 634.5 nm 色容差: 130.2
明暗视觉比: 0.1 中心波长: 632.9 nm 主波长: 624.4 nm 质心波长: 631.1 nm
半宽度: 18.9 nm 色偏差: 0.00766 色纯度: 98.8 % 色质指数: -nan(ind)
LER(TM-30): 179.2 辐射功率: 288.8 mw 色域指数(Rg): 95.0 逼真度(Rf): 12.7
红光辐射功率: 284.8 mw 近红辐射功率: 0.0 mw 远红辐射功率: 0.0 mw

电参数:





光效: 3.1 Lm/W 能效: 3.4 能效等级: G
电压: 220.7 V 电流: 0.142 A 功率: 16.790 W 功率因素: 0.534

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:

Rf: 12.7 CCT: 1000K
Rg: 95.0 LER: 179.2 Duv: 0.0

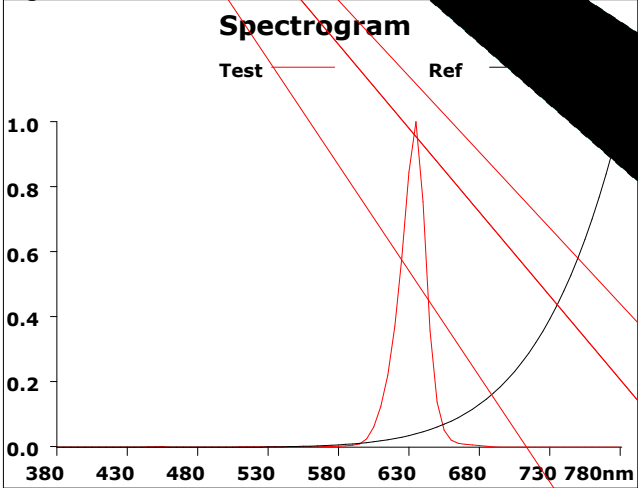

500			
Hue Bin	Rf	Chroma	Hue
1	3.2	-62.4%	46.5%
2	30.7	-18.8%	111.6%
3	50.4	71.9%	129.6%
4	100.0	nan%	-nan(ind)%
5	75.4	90.9%	-3.5%
6	59.1	nan%	-nan(ind)%
7	24.6	0.2%	-39.4%
8	15.9	14.0%	-27.2%
9	60.4	24.6%	26.6%
10	56.1	39.6%	56.1%
11	39.6	14.4%	85.4%
12	14.4	23.1%	114.7%
13	63.0	-37.1%	144.0%
14	3.6	-55.7%	173.3%
15			
16			

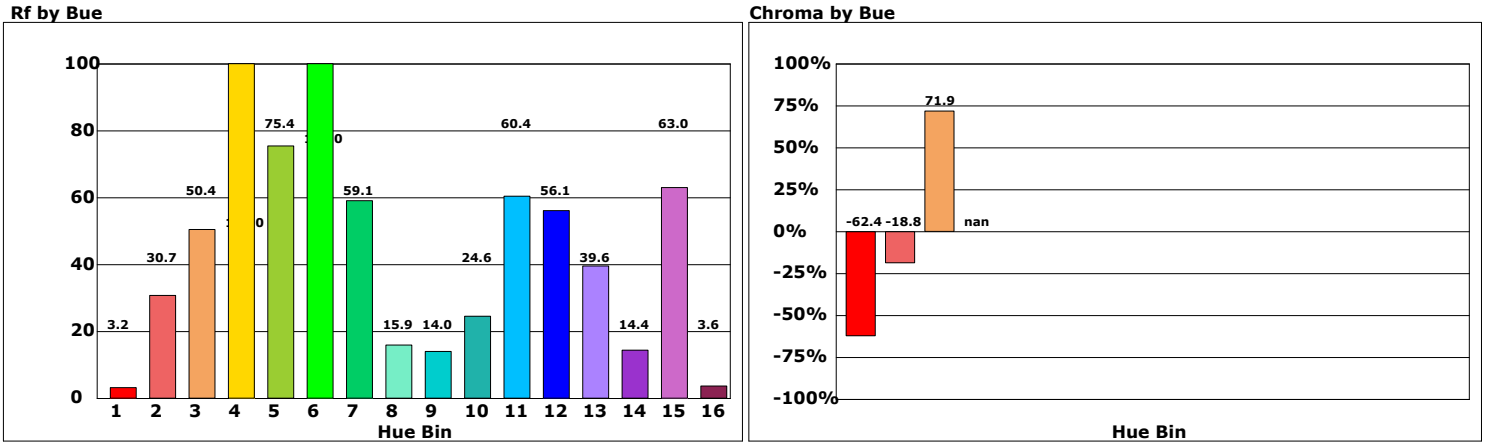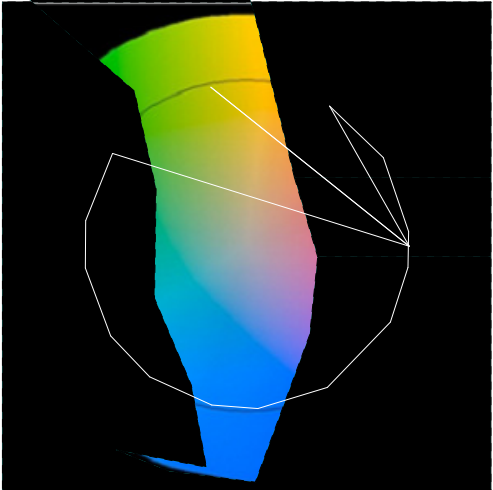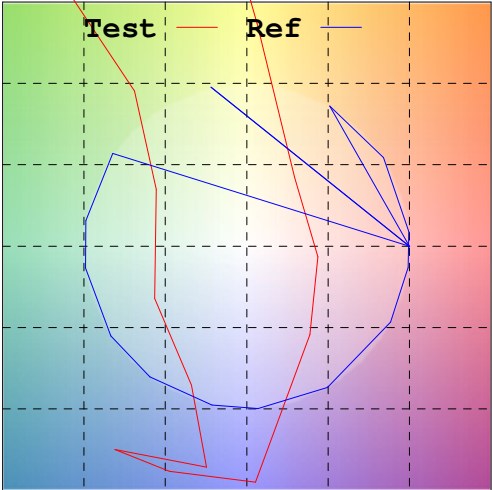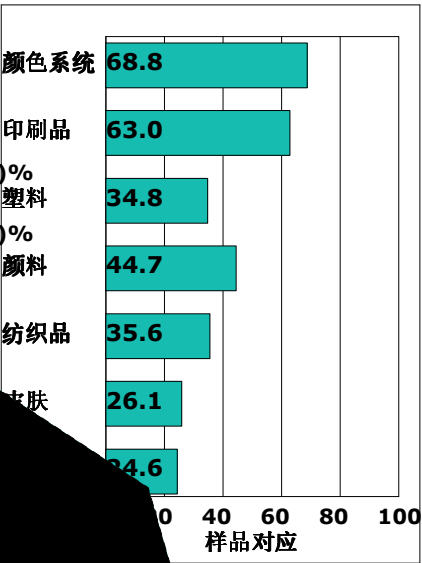

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173