


光谱图

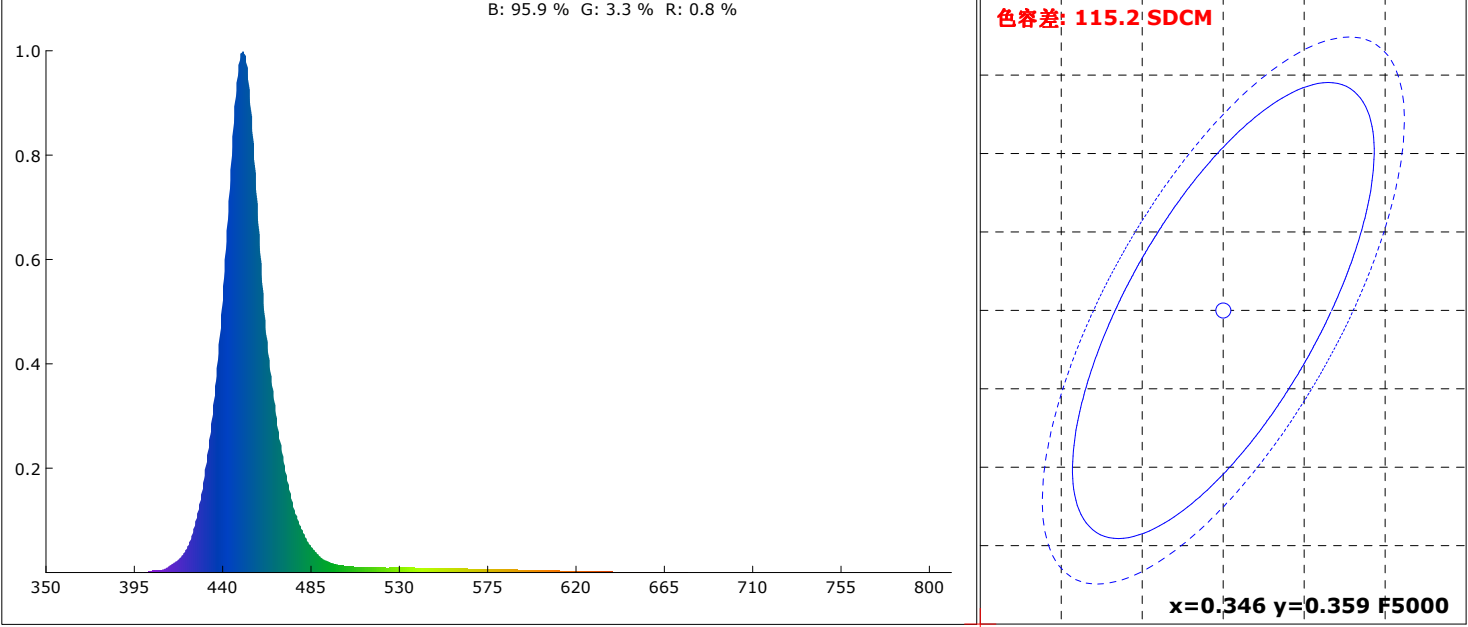

颜色参数:

坐标x: 0.1575

坐标y: 0.0393

坐标u: 0.1996

坐标v: 0.0747

坐标u': 0.1996

坐标v': 0.1120

红色比: 0.8 %

绿色比: 3.3 %

蓝色比: 95.9 %

光通量红色比: 3.4 %

光通量绿色比: 36.5 %

光通量蓝色比: 60.1 %

显色指数: -38.8

AvgR: -38.5

R1: 41.8

R2: -23.5

R3: -99.0

R4: -93.5

R5: 45.2

R6: -21.3

R7: -54.5

R8: -44.3

R9: -99.0

R10: -99.0

R11: -99.0

R12: -73.8

R13: 27.3

R14: -32.6

R15: 47.0

色温: 99999 K

光通量: 33.242 lm

峰值波长: 450.6 nm

色容差: 115.2

明暗视觉比: 15.6

中心波长: 451.0 nm

主波长: 456.6 nm

质心波长: 456.6 nm

半宽度: 21.4 nm

色偏差: 0.15267

色纯度: 95.3 %

色质指数: 0.2

LER(TM-30): 51.6

辐射功率: 644.4 mw

色域指数(Rg): nan

逼真度(Rf): -nan(ind)

红光辐射功率: 5.3 mw

近红辐射功率: 0.0 mw

远红辐射功率: 0.0 mw

电参数:

光效: 1.7 Lm/W

能效: 1.8

能效等级: G

电压: 220.6 V

电流: 0.167 A

功率: 20.080 W

功率因素: 0.543

产品型号:

产品编号:

测试人员:


备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd


测试单位:

测试日期:03/31/13

Rf: -nan(ind) CCT: 99999K u': 0.1996
Rg: nan LER: 51.6 Duv: 0.15267 v': 0.1120

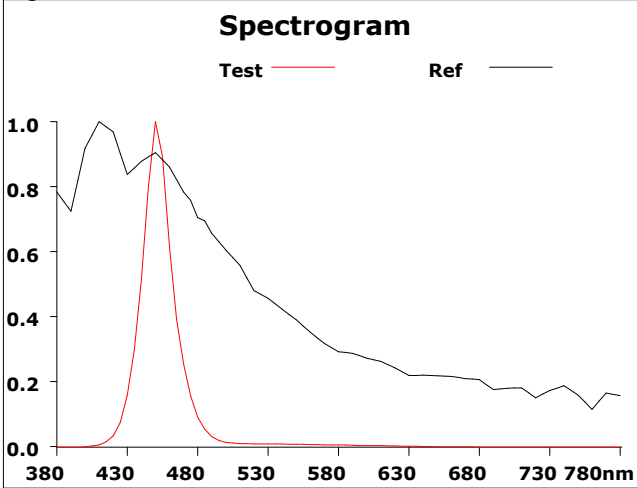

500			
Hue Bin	Rf	Chroma	Hue
1	-nan(ind)	nan%	-nan(ind)%
2	0.0	-31.9%	40.7%
3	0.0	-149.7%	308.8%
4	0.0	-24.3%	310.0%
5	0.0	93.5%	295.6%
6	0.0	211.7%	227.5%
7	0.0	226.7%	91.0%
8	0.0	273.6%	-23.2%
9	0.0	158.8%	-104.4%
10	-nan(ind)	nan%	-nan(ind)%
11	-nan(ind)	nan%	-nan(ind)%
12	-nan(ind)	nan%	-nan(ind)%
13	-nan(ind)	nan%	-nan(ind)%
14	-nan(ind)	nan%	-nan(ind)%
15	-nan(ind)	nan%	-nan(ind)%
16	-nan(ind)	nan%	-nan(ind)%

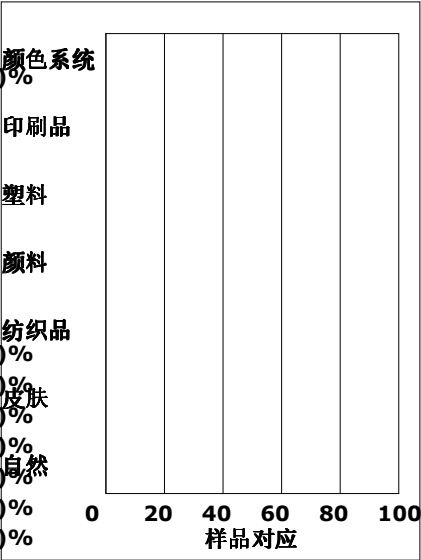

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012