



光谱图

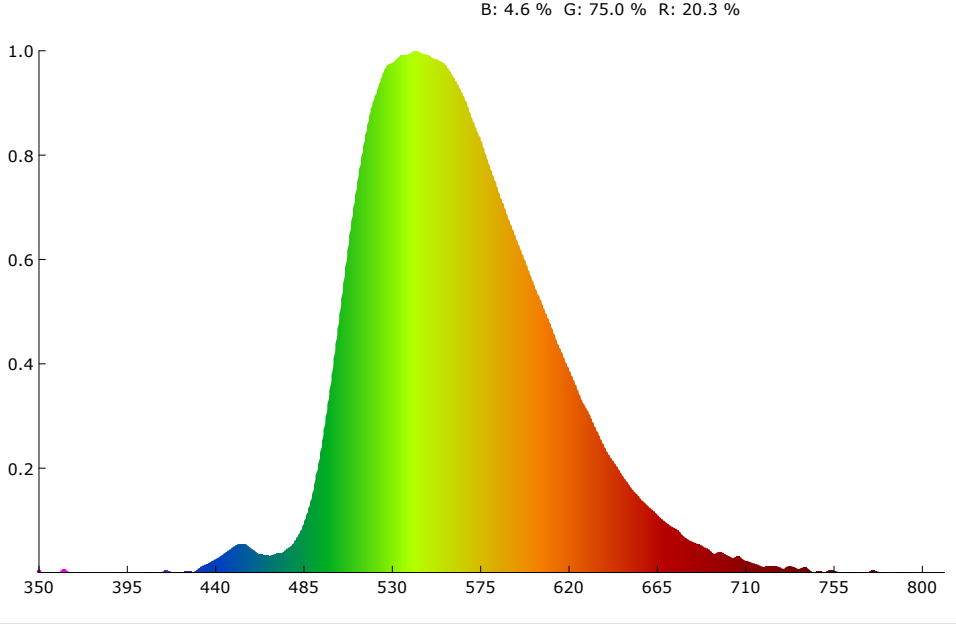

SDCM

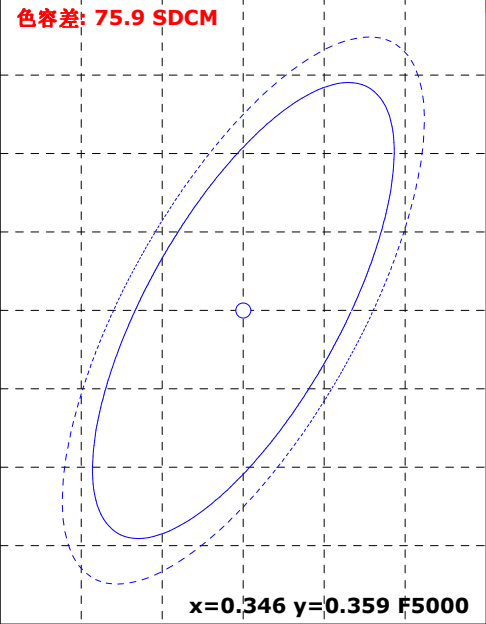

颜色参数:

坐标x: 0.3904 坐标y: 0.5576 坐标u: 0.1753 坐标v: 0.3755 坐标u': 0.1753 坐标v': 0.5633
红色比: 20.3 % 绿色比: 75.0 % 蓝色比: 4.6 % 光通量红色比: 8.9 % 光通量绿色比: 90.7 % 光通量蓝色比: 0.4 %

显色指数: 40.5 AvgR: 25.2
R1: 35.4 R2: 51.1 R3: 57.6 R4: 17.1 R5: 36.6 R6: 48.2 R7: 58.0 R8: 20.0
R9: -99.0 R10: 3.6 R11: 0.0 R12: 15.5 R13: 36.7 R14: 79.6 R15: 18.3


色温: 4569 K 光通量: 197.525 lm 峰值波长: 542.4 nm 色容差: 75.9
明暗视觉比: 1.5 中心波长: 555.9 nm 主波长: 563.9 nm 质心波长: 563.6 nm
半宽度: 103.9 nm 色偏差: 0.06304 色纯度: 84.9 % 色质指数: 36.7
LER(TM-30): 477.4 辐射功率: 413.7 mw 色域指数(Rg): 50.3 逼真度(Rf): 44.3
红光辐射功率: 83.6 mw 近红辐射功率: 2.8 mw 远红辐射功率: 0.0 mw

电参数:





光效: 9.4 Lm/W 能效: 10.2 能效等级: G
电压: 220.7 V 电流: 0.174 A 功率: 21.040 W 功率因素: 0.545

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:


Rf: 44.3 CCT: 4569K u': 0.1753
Rg: 50.3 LER: 477.4 Duv: 0.06304 v': 0.5633

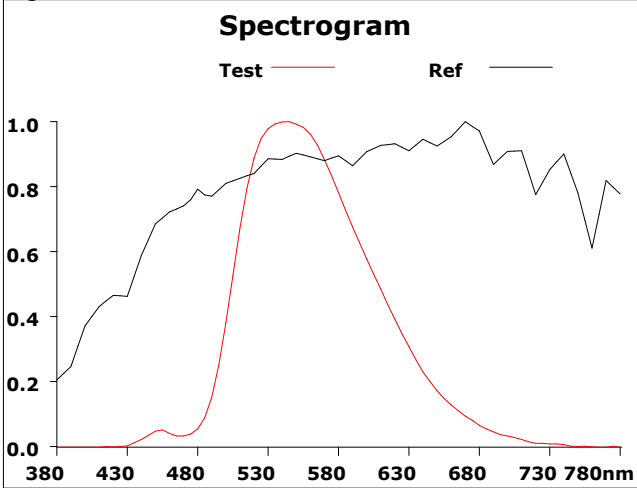

500			
Hue Bin	Rf	Chroma	Hue
1	39.8	-30.3%	0.6%
2	48.3	-23.8%	-3.7%
3	33.0	-31.5%	-7.8%
4	35.1	-36.3%	-8.0%
5	38.0	-45.2%	2.8%
6	26.2	-45.5%	13.6%
7	23.0	-39.3%	26.5%
8	33.7	-29.5%	22.2%
9	49.1	-22.0%	24.8%
10	50.6	-16.3%	24.8%
11	68.5	-13.5%	9.4%
12	65.1	-17.1%	-1.3%
13	64.2	-20.3%	-13.9%
14	52.1	-22.5%	-7.8%
15	53.8	-25.6%	-12.3%
16	41.4	-27.8%	-1.1%

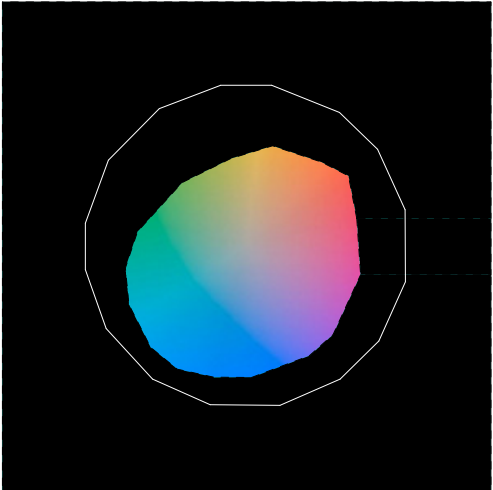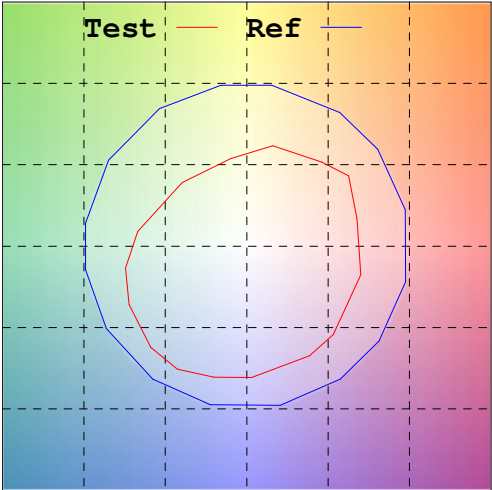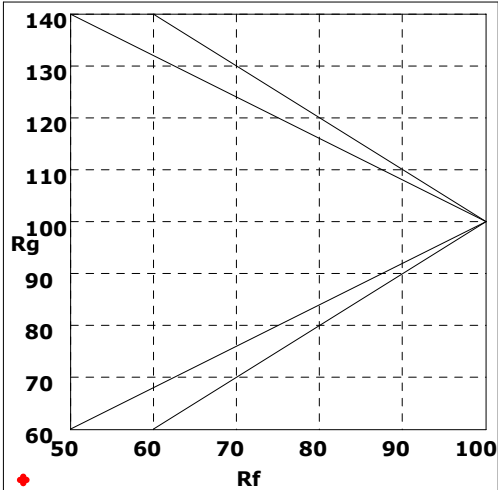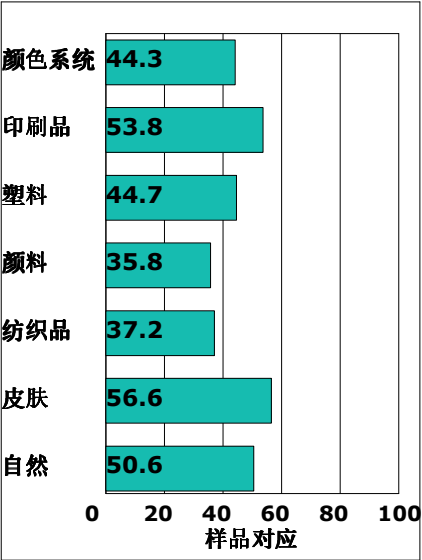

Rf by Bue

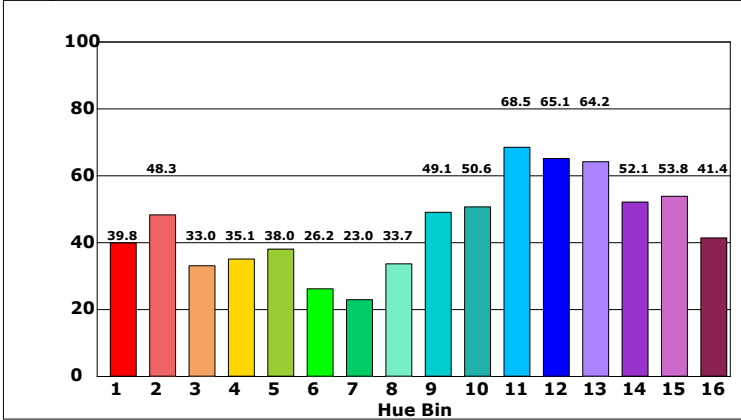

Chroma by Bue

