



光谱图

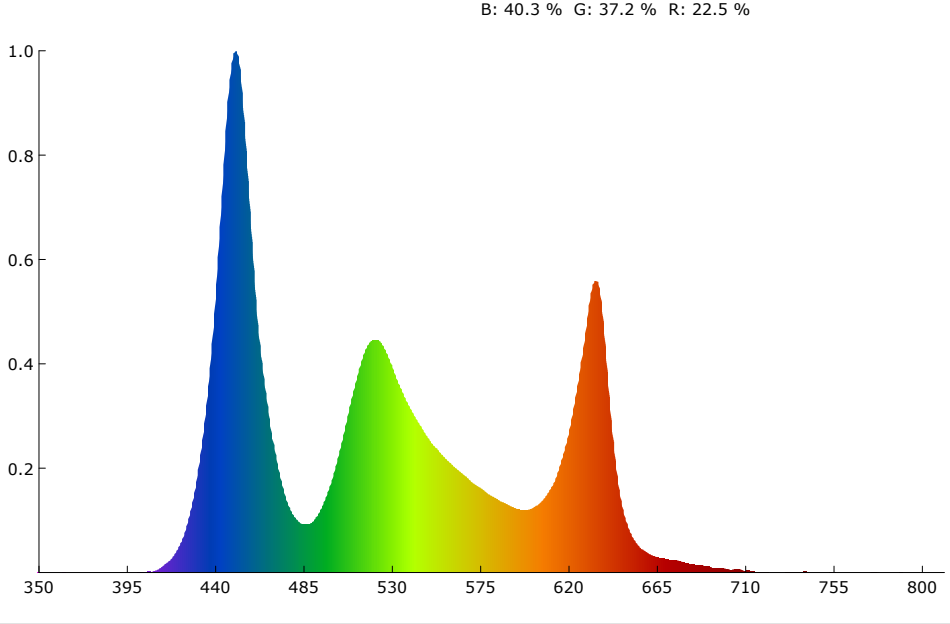

SDCM

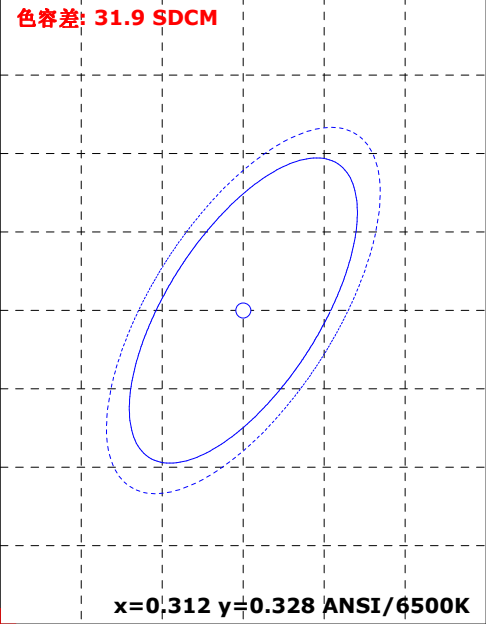

颜色参数:

坐标x: 0.2715 坐标y: 0.2721 坐标u: 0.1898 坐标v: 0.2853 坐标u': 0.1898 坐标v': 0.4279
红色比: 22.5 % 绿色比: 37.2 % 蓝色比: 40.3 % 光通量红色比: 15.9 % 光通量绿色比: 79.1 % 光通量蓝色比: 5.0 %

显色指数: 77.8 AvgR: 68.9
R1: 79.3 R2: 95.4 R3: 66.3 R4: 68.8 R5: 87.4 R6: 92.1 R7: 78.8 R8: 54.3
R9: -28.8 R10: 84.8 R11: 59.7 R12: 62.3 R13: 85.9 R14: 79.6 R15: 67.2


色温: 12683 K 光通量: 179.625 lm 峰值波长: 450.6 nm 色容差: 31.9
明暗视觉比: 2.8 中心波长: 450.8 nm 主波长: 477.2 nm 质心波长: 526.5 nm
半宽度: 21.6 nm 色偏差: -0.00278 色纯度: 26.7 % 色质指数: 89.1
LER(TM-30): 261.4 辐射功率: 687.3 mw 色域指数(Rg): 111.5 逼真度(Rf): 78.7
红光辐射功率: 154.2 mw 近红辐射功率: 1.2 mw 远红辐射功率: 0.0 mw

电参数:







光效: 5.4 Lm/W 能效: 5.9 能效等级: G
电压: 220.7 V 电流: 0.263 A 功率: 33.190 W 功率因素: 0.570

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:

Rf: 78.7 CCT: 12683K u': 0.1898
Rg: 111.5 LER: 261.4 Duv: -0.00278 v': 0.4279

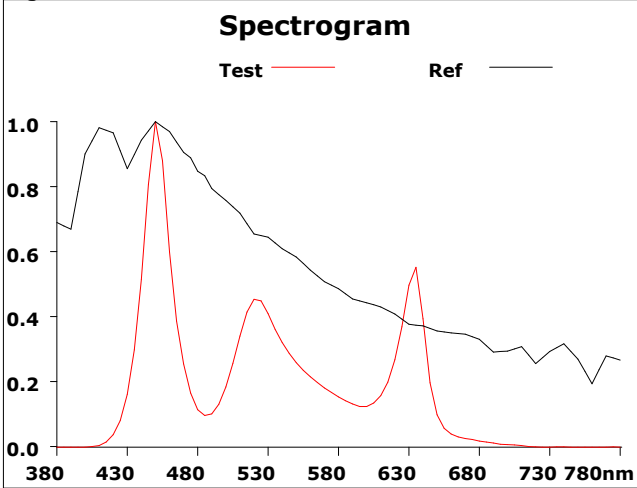

500			
Hue Bin	Rf	Chroma	Hue
1	68.2	15.8%	-0.7%
2	80.8	6.8%	-6.1%
3	86.8	4.0%	-5.5%
4	85.9	2.1%	2.1%
5	83.0	-0.1%	3.6%
6	81.4	8.0%	6.9%
7	75.1	-2.7%	1.8%
8	88.0	2.7%	1.7%
9	89.8	-1.4%	4.9%
10	80.4	-3.5%	13.1%
11	60.7	0.2%	18.2%
12	77.7	-0.1%	17.1%
13	66.6	6.4%	21.4%
14	65.3	9.0%	19.4%
15	65.2	25.6%	15.1%
16	73.1	11.7%	2.8%

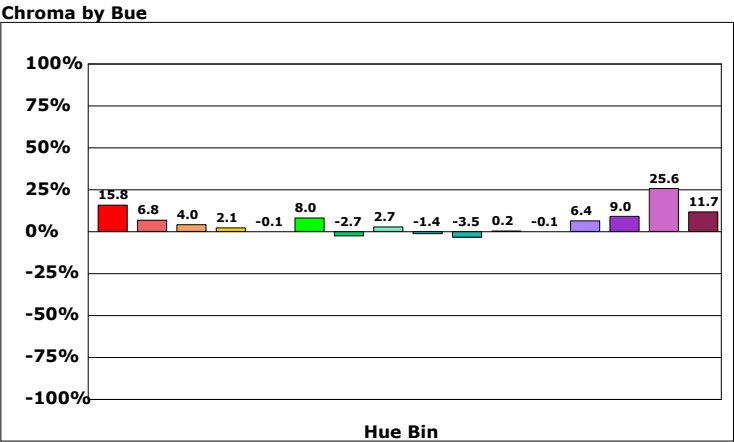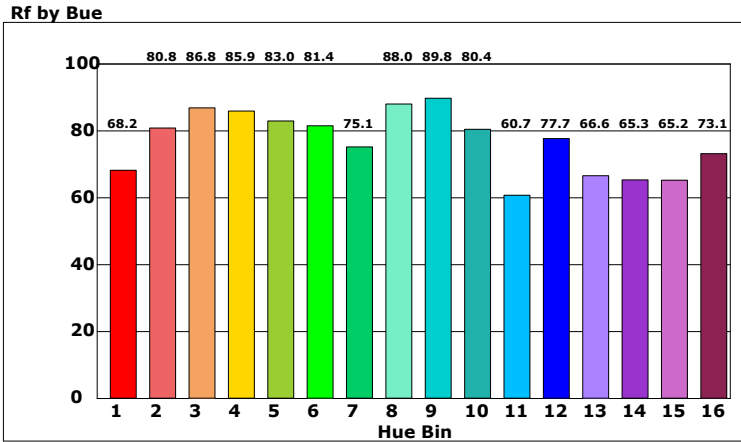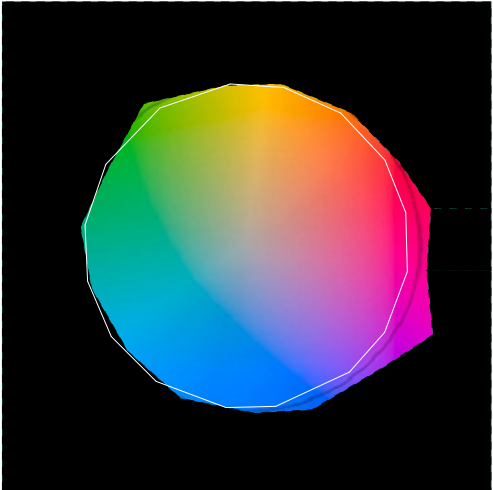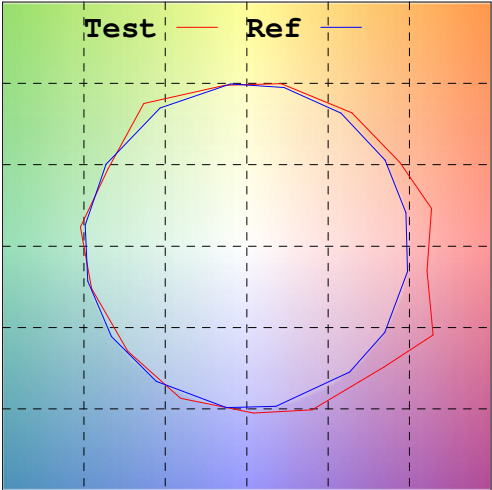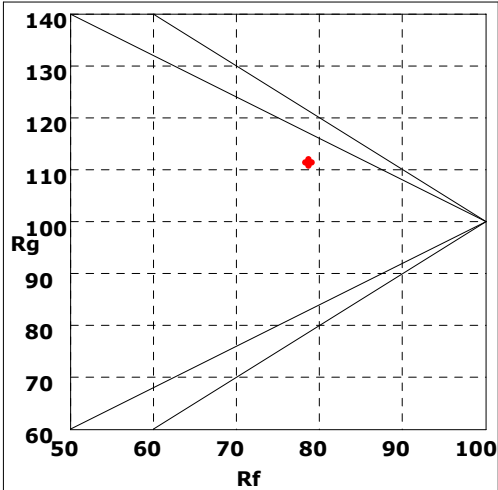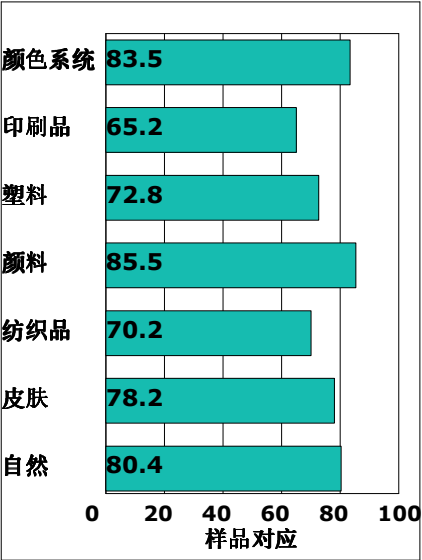

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/31/13

