256K X 36, 512K X 18 3.3V Synchronous SRAMs 2.5V I/O, Burst Counter Pipelined Outputs, Single Cycle Deselect

IDT71V67602
IDT71V67802

Features

- **256K x 36, 512K x 18 memory configurations**
- **Supports high system speed:**
  - *166MHz 3.5ns clock access time*
  - *150MHz 3.8ns clock access time*
  - *133MHz 4.2ns clock access time*
- **$\overline{LBO}$ input selects interleaved or linear burst mode**
- **Self-timed write cycle with global write control ($\overline{GW}$), byte write enable ($\overline{BWE}$), and byte writes ($\overline{BW}$x)**
- **3.3V core power supply**
- **Power down controlled by ZZ input**
- **2.5V I/O supply (V_{DDQ})**
- **Packaged in a JEDEC Standard 100-pin plastic thin quad flatpack (TQFP), 119 ball grid array (BGA) and 165 fine pitch ball grid array.**

Description

The IDT71V67602/7802 are high-speed SRAMs organized as 256K x 36/512K x 18. The IDT71V676/78 SRAMs contain write, data, address and control registers. Internal logic allows the SRAM to generate a self-timed write based upon a decision which can be left until the end of the write cycle.

The burst mode feature offers the highest level of performance to the system designer, as the IDT71V67602/7802 can provide four cycles of data for a single address presented to the SRAM. An internal burst address counter accepts the first cycle address from the processor, initiating the access sequence. The first cycle of output data will be pipelined for one cycle before it is available on the next rising clock edge. If burst mode operation is selected ($\overline{ADV}$=LOW), the subsequent three cycles of output data will be available to the user on the next three rising clock edges. The order of these three addresses are defined by the internal burst counter and the $\overline{LBO}$ input pin.

The IDT71V67602/7802 SRAMs utilize IDT's latest high-performance CMOS process and are packaged in a JEDEC standard 14mm x 20mm 100-pin thin plastic quad flatpack (TQFP) as well as a 119 ball grid array (BGA) and 165 fine pitch ball grid array (fBGA).

Pin Description Summary

A_0-A_{18}	Address Inputs	Input	Synchronous
$\overline{CE}$	Chip Enable	Input	Synchronous
CS_0, $\overline{CS_1}$	Chip Selects	Input	Synchronous
$\overline{OE}$	Output Enable	Input	Asynchronous
$\overline{GW}$	Global Write Enable	Input	Synchronous
$\overline{BWE}$	Byte Write Enable	Input	Synchronous
$\overline{BW_1}$, $\overline{BW_2}$, $\overline{BW_3}$, $\overline{BW_4}$(1)	Individual Byte Write Selects	Input	Synchronous
CLK	Clock	Input	N/A
$\overline{ADV}$	Burst Address Advance	Input	Synchronous
$\overline{ADSC}$	Address Status (Cache Controller)	Input	Synchronous
$\overline{ADSP}$	Address Status (Processor)	Input	Synchronous
$\overline{LBO}$	Linear / Interleaved Burst Order	Input	DC
ZZ	Sleep Mode	Input	Asynchronous
I/O_0-I/O_{31}, I/O_{P1}-I/O_{P4}	Data Input / Output	I/O	Synchronous
V_{DD}, V_{DDQ}	Core Power, I/O Power	Supply	N/A
V_{SS}	Ground	Supply	N/A

5311 tbl 01

NOTE:

1. $\overline{BW_3}$ and $\overline{BW_4}$ are not applicable for the IDT71V67802.

FEBRUARY 2009

© 2019 Renesas Electronics Corporation

Pin Definitions(1)


Symbol	Pin Function	I/O	Active	Description
A_0-A_{18}	Address Inputs	I	N/A	Synchronous Address inputs. The address register is triggered by a combination of the rising edge of CLK and $\overline{ADSC}$ Low or $\overline{ADSP}$ Low and $\overline{CE}$ Low.
$\overline{ADSC}$	Address Status (Cache Controller)	I	LOW	Synchronous Address Status from Cache Controller. $\overline{ADSC}$ is an active LOW input that is used to load the address registers with new addresses.
$\overline{ADSP}$	Address Status (Processor)	I	LOW	Synchronous Address Status from Processor. $\overline{ADSP}$ is an active LOW input that is used to load the address registers with new addresses. $\overline{ADSP}$ is gated by $\overline{CE}$.
$\overline{ADV}$	Burst Address Advance	I	LOW	Synchronous Address Advance. $\overline{ADV}$ is an active LOW input that is used to advance the internal burst counter, controlling burst access after the initial address is loaded. When the input is HIGH the burst counter is not incremented; that is, there is no address advance.
$\overline{BWE}$	Byte Write Enable	I	LOW	Synchronous byte write enable gates the byte write inputs $\overline{BW_1}$-$\overline{BW_4}$. If $\overline{BWE}$ is LOW at the rising edge of CLK then $\overline{BW}$x inputs are passed to the next stage in the circuit. If $\overline{BWE}$ is HIGH then the byte write inputs are blocked and only $\overline{GW}$ can initiate a write cycle.
$\overline{BW_1}$-$\overline{BW_4}$	Individual Byte Write Enables	I	LOW	Synchronous byte write enables. $\overline{BW_1}$ controls I/O_{0-7}, I/O_{P1}, $\overline{BW_2}$ controls I/O_{8-15}, I/O_{P2}, etc. Any active byte write causes all outputs to be disabled.
$\overline{CE}$	Chip Enable	I	LOW	Synchronous chip enable. $\overline{CE}$ is used with CS_0 and $\overline{CS_1}$ to enable the IDT71V67602/7802. $\overline{CE}$ also gates $\overline{ADSP}$.
CLK	Clock	I	N/A	This is the clock input. All timing references for the device are made with respect to this input.
CS_0	Chip Select 0	I	HIGH	Synchronous active HIGH chip select. CS_0 is used with $\overline{CE}$ and $\overline{CS_1}$ to enable the chip.
$\overline{CS_1}$	Chip Select 1	I	LOW	Synchronous active LOW chip select. $\overline{CS_1}$ is used with $\overline{CE}$ and CS_0 to enable the chip.
$\overline{GW}$	Global Write Enable	I	LOW	Synchronous global write enable. This input will write all four 9-bit data bytes when LOW on the rising edge of CLK. $\overline{GW}$ supersedes individual byte write enables.
I/O_0-I/O_{31} I/O_{P1}-I/O_{P4}	Data Input/Output	I/O	N/A	Synchronous data input/output (I/O) pins. Both the data input path and data output path are registered and triggered by the rising edge of CLK.
$\overline{LBO}$	Linear Burst Order	I	LOW	Asynchronous burst order selection input. When $\overline{LBO}$ is HIGH, the interleaved burst sequence is selected. When $\overline{LBO}$ is LOW the Linear burst sequence is selected. $\overline{LBO}$ is a static input and must not change state while the device is operating.
$\overline{OE}$	Output Enable	I	LOW	Asynchronous output enable. When $\overline{OE}$ is LOW the data output drivers are enabled on the I/O pins if the chip is also selected. When $\overline{OE}$ is HIGH the I/O pins are in a high-impedance state.
V_{DD}	Power Supply	N/A	N/A	3.3V core power supply.
V_{DDQ}	Power Supply	N/A	N/A	2.5V I/O Supply.
V_{SS}	Ground	N/A	N/A	Ground.
NC	No Connect	N/A	N/A	NC pins are not electrically connected to the device.
ZZ	Sleep Mode	I	HIGH	Asynchronous sleep mode input. ZZ HIGH will gate the CLK internally and power down the IDT71V67602/7802 to its lowest power consumption level. Data retention is guaranteed in Sleep Mode.

5311 tbl 02

NOTE:
1. All synchronous inputs must meet specified setup and hold times with respect to CLK.

© 2019 Renesas Electronics Corporation

Functional Block Diagram

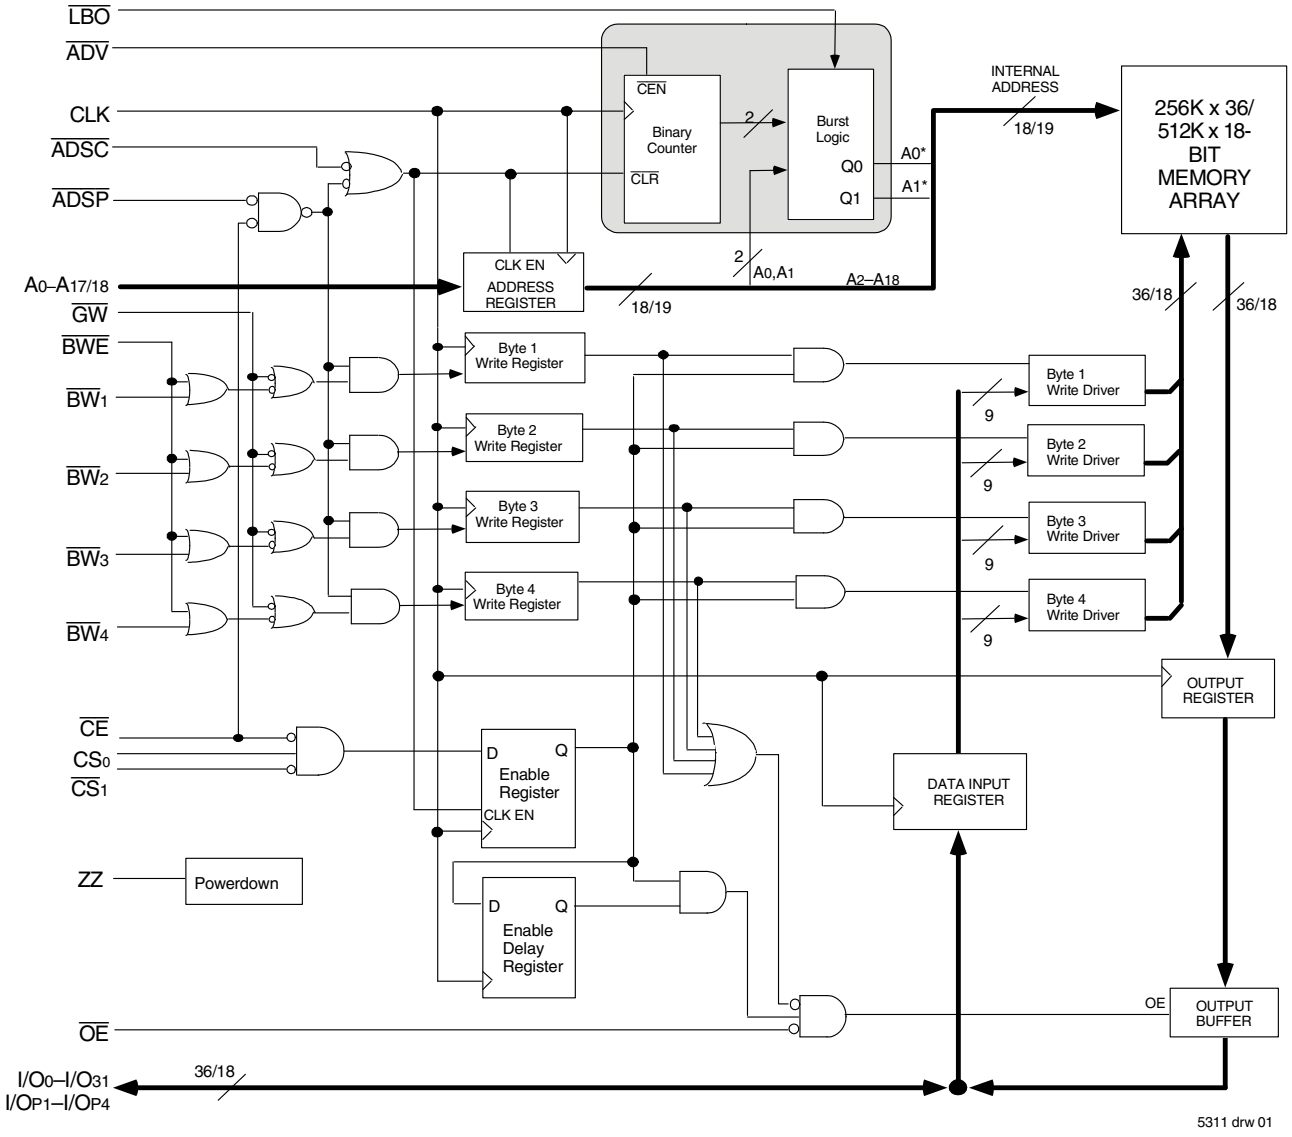

© 2019 Renesas Electronics Corporation

Absolute Maximum Ratings(1)

Symbol	Rating	Commercial	Unit
V_{TERM}(2)	Terminal Voltage with Respect to GND	-0.5 to +4.6	V
V_{TERM}(3,6)	Terminal Voltage with Respect to GND	-0.5 to V_{DD}	V
V_{TERM}(4,6)	Terminal Voltage with Respect to GND	-0.5 to V_{DD} +0.5	V
V_{TERM}(5,6)	Terminal Voltage with Respect to GND	-0.5 to V_{DDQ} +0.5	V
T_A(7)	Commercial	-0 to +70	°C
	Industrial	-40 to +85	°C
T_{BIAS}	Temperature Under Bias	-55 to +125	°C
T_{STG}	Storage Temperature	-55 to +125	°C
P_T	Power Dissipation	2.0	W
I_{OUT}	DC Output Current	50	mA

5311 tbl 03

NOTES:
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. V_{DD} terminals only.
3. V_{DDQ} terminals only.
4. Input terminals only.
5. I/O terminals only.
6. This is a steady-state DC parameter that applies after the power supplies have ramped up. Power supply sequencing is not necessary; however, the voltage on any input or I/O pin cannot exceed V_{DDQ} during power supply ramp up.
7. T_A is the "instant on" case temperature.

Recommended Operating Temperature and Supply Voltage

Grade	Temperature(1)	Vss	V_{DD}	V_{DDQ}
Commercial	0°C to +70°C	0V	3.3V±5%	2.5V±5%
Industrial	-40°C to +85°C	0V	3.3V±5%	2.5V±5%

5311 tbl 04

NOTE:
1. T_A is the "instant on" case temperature.

Recommended DC Operating Conditions

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_{DD}	Core Supply Voltage	3.135	3.3	3.465	V
V_{DDQ}	I/O Supply Voltage	2.375	2.5	2.625	V
V_{SS}	Ground	0	0	0	V
V_{IH}	Input High Voltage - Inputs	1.7	—	V_{DD}+0.3	V
V_{IH}	Input High Voltage - I/O	1.7	—	V_{DDQ}+0.3	V
V_{IL}	Input Low Voltage	-0.3(1)	—	0.7	V

5311 tbl 06

NOTE:
1. V_{IL} (min) = -1.0V for pulse width less than $t_{CYC/2}$, once per cycle.

100-pin TQFP Capacitance
(T_A = +25°C, f = 1.0MHz)

Symbol	Parameter(1)	Conditions	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 3dV	5	pF
$C_{I/O}$	I/O Capacitance	V_{OUT} = 3dV	7	pF

5311 tbl 07

165 fBGA Capacitance
(T_A = +25°C, f = 1.0MHz)

Symbol	Parameter(1)	Conditions	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 3dV	7	pF
$C_{I/O}$	I/O Capacitance	V_{OUT} = 3dV	7	pF

5311 tbl 07b

119 BGA Capacitance
(T_A = +25°C, f = 1.0MHz)


Symbol	Parameter(1)	Conditions	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 3dV	7	pF
$C_{I/O}$	I/O Capacitance	V_{OUT} = 3dV	7	pF

5311 tbl 07a

NOTE:
1. This parameter is guaranteed by device characterization, but not production tested.

© 2019 Renesas Electronics Corporation

Pin Configuration – 256K x 36, 100-Pin TQFP

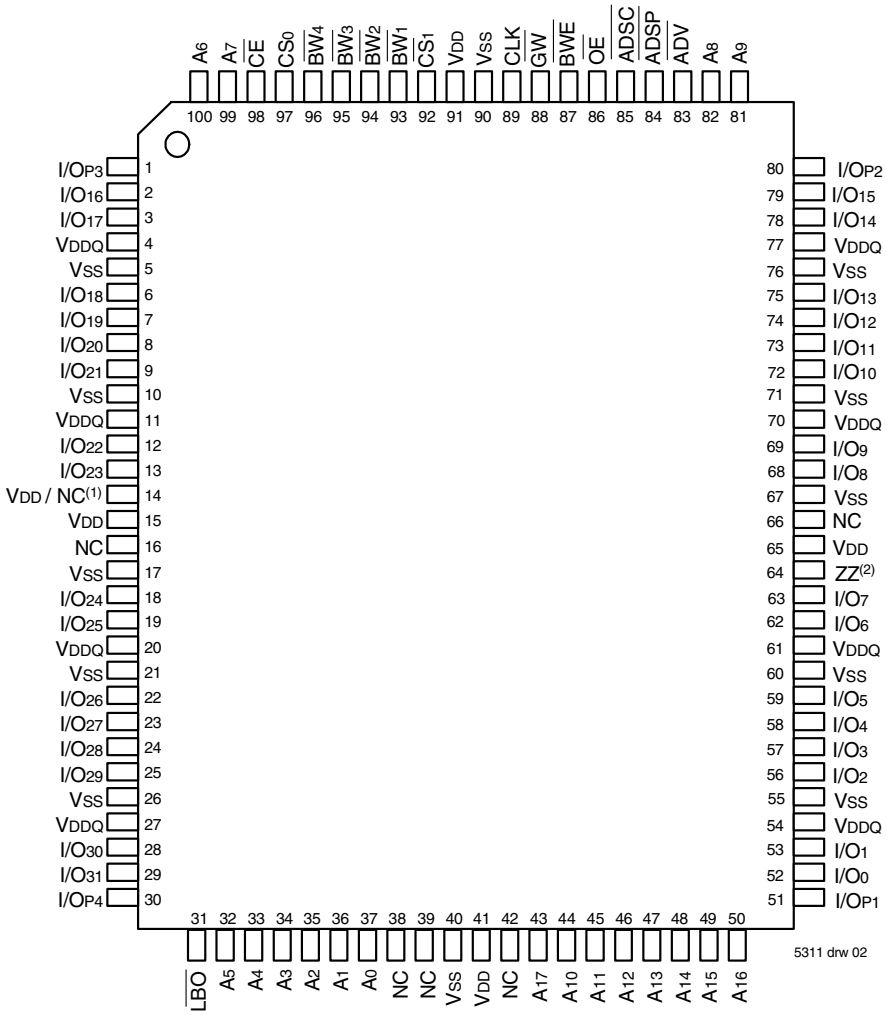


Top View

NOTES:

1. Pin 14 can either be directly connected to V_{DD}, or connected to an input voltage $\geq V_{IH}$, or left unconnected.
2. Pin 64 can be left unconnected and the device will always remain in active mode.

© 2019 Renesas Electronics Corporation

Pin Configuration – 512K x 18, 100-Pin TQFP

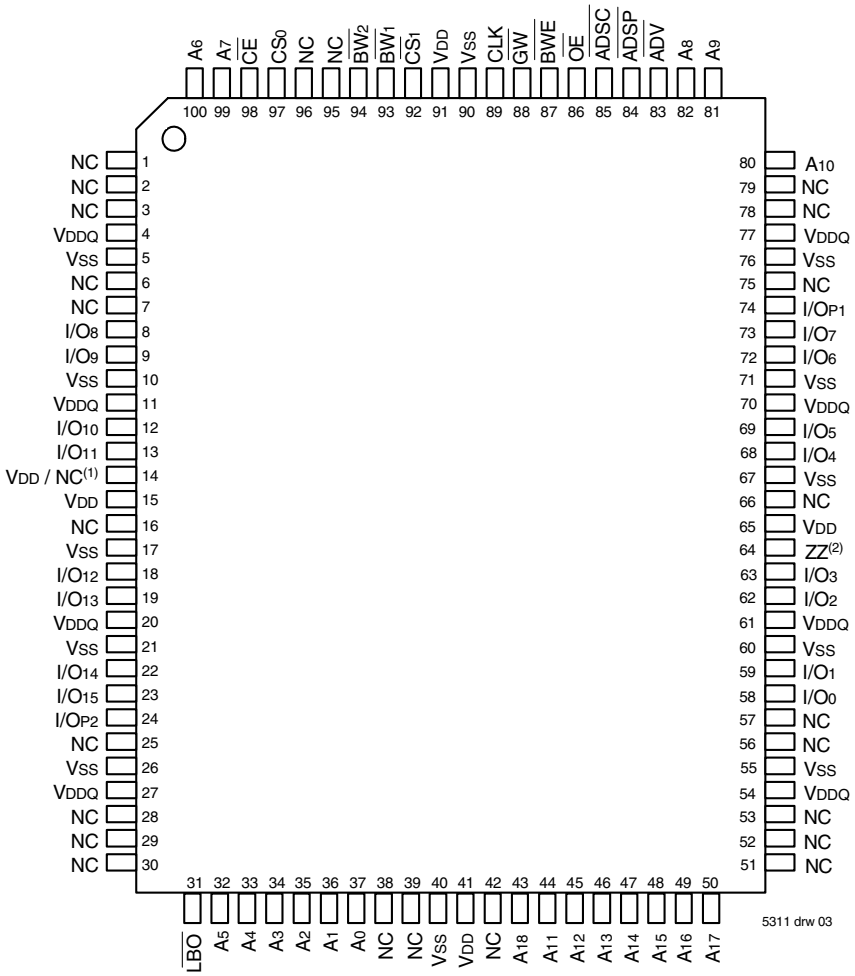


Top View

NOTES:
1. Pin 14 can either be directly connected to V_{DD}, or connected to an input voltage $\geq V_{IH}$, or left unconnected.
2. Pin 64 can be left unconnected and the device will always remain in active mode.

© 2019 Renesas Electronics Corporation


Pin Configuration – 256K x 36, 119 BGA

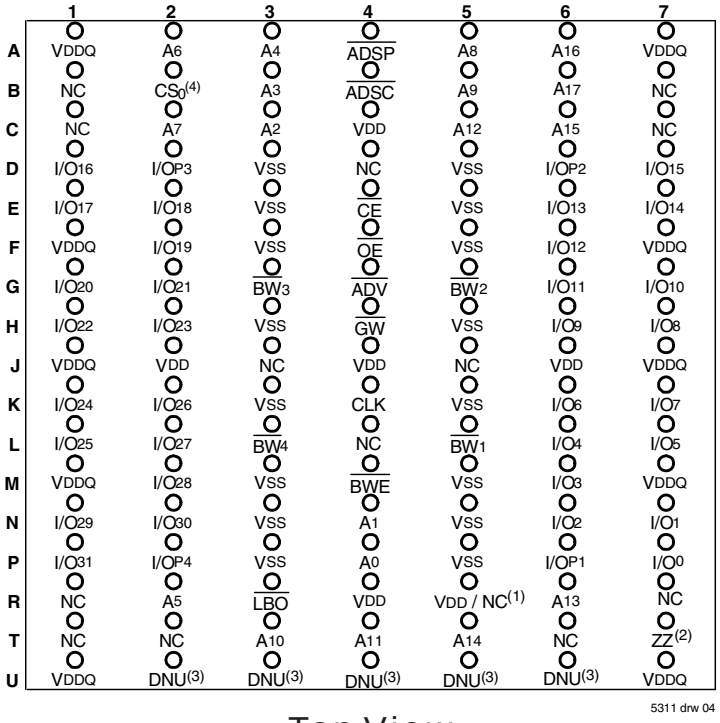

5311 drw 04

Top View

Pin Configuration – 512K x 18, 119 BGA

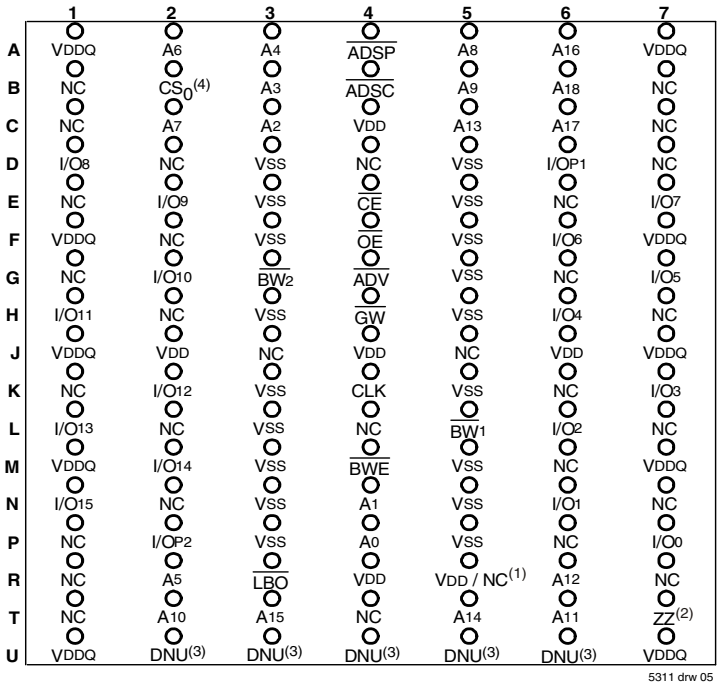

5311 drw 05

Top View

NOTES:

1. R5 can either be directly connected to V_{DD}, or connected to an input voltage $\geq V_{IH}$, or left unconnected.
2. T7 can be left unconnected and the device will always remain in active mode.
3. Pin U6 will be internally pulled to V_{DD} if not actively driven. To disable the TAP controller without interfering with normal operation, $\overline{TRST}$ should be tied low and TCK, TDI, and TMS should be pulled through a resistor to 3.3V. TDO should be left unconnected.
4. On future 18M device CS_0 will be removed, B2 will be be used for address expansion.

© 2019 Renesas Electronics Corporation

Pin Configuration – 256K x 36, 165 fBGA

	1	2	3	4	5	6	7	8	9	10	11
A	NC(3)	A7	$\overline{CE}$	$\overline{BW_3}$	$\overline{BW_2}$	$\overline{CS_1}$	$\overline{BWE}$	$\overline{ADSC}$	$\overline{ADV}$	A8	NC
B	NC	A6	CS0	$\overline{BW_4}$	$\overline{BW_1}$	CLK	$\overline{GW}$	$\overline{OE}$	$\overline{ADSP}$	A9	NC(3)
C	I/OP3	NC	VDDQ	VSS	VSS	VSS	VSS	VSS	VDDQ	NC	I/OP2
D	I/O17	I/O16	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O15	I/O14
E	I/O19	I/O18	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O13	I/O12
F	I/O21	I/O20	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O11	I/O10
G	I/O23	I/O22	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O9	I/O8
H	VDD(1)	NC	NC	VDD	VSS	VSS	VSS	VDD	NC	NC	ZZ(2)
J	I/O25	I/O24	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O7	I/O6
K	I/O27	I/O26	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O5	I/O4
L	I/O29	I/O28	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O3	I/O2
M	I/O31	I/O30	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O1	I/O0
N	I/OP4	NC	VDDQ	VSS	NC	NC(3)	NC	VSS	VDDQ	NC	I/OP1
P	NC	NC(3)	A5	A2	DNU(4)	A1	DNU(4)	A10	A13	A14	A17
R	$\overline{LBO}$	NC(3)	A4	A3	DNU(4)	A0	DNU(4)	A11	A12	A15	A16

5311 tbl 17a

Pin Configuration – 512K x 18, 165 fBGA

	1	2	3	4	5	6	7	8	9	10	11
A	NC(3)	A7	$\overline{CE}$	$\overline{BW_2}$	NC	$\overline{CS_1}$	$\overline{BWE}$	$\overline{ADSC}$	$\overline{ADV}$	A8	A10
B	NC	A6	CS0	NC	$\overline{BW_1}$	CLK	$\overline{GW}$	$\overline{OE}$	$\overline{ADSP}$	A9	NC(3)
C	NC	NC	VDDQ	VSS	VSS	VSS	VSS	VSS	VDDQ	NC	I/OP1
D	NC	I/O8	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	NC	I/O7
E	NC	I/O9	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	NC	I/O6
F	NC	I/O10	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	NC	I/O5
G	NC	I/O_{11}	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	NC	I/O4
H	VDD(1)	NC	NC	VDD	VSS	VSS	VSS	VDD	NC	NC	ZZ(2)
J	I/O12	NC	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O3	NC
K	I/O13	NC	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O2	NC
L	I/O14	NC	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O1	NC
M	I/O15	NC	VDDQ	VDD	VSS	VSS	VSS	VDD	VDDQ	I/O0	NC
N	I/OP2	NC	VDDQ	VSS	NC	NC(3)	NC	VSS	VDDQ	NC	NC
P	NC	NC(3)	A5	A2	DNU(4)	A1	DNU(4)	A11	A14	A15	A18
R	$\overline{LBO}$	NC(3)	A4	A3	DNU(4)	A0	DNU(4)	A12	A13	A16	A17

5311 tbl 17b

NOTES:
1. H1 can either be directly connected to V_{DD}, or connected to an input voltage $\geq V_{IH}$, or left unconnected.
2. H11 can be left unconnected and the device will always remain in active mode.
3. Pin N6, B11, A1, R2 and P2 are reserved for 18M, 36M, 72M, and 144M and 288M respectively.

© 2019 Renesas Electronics Corporation

DC Electrical Characteristics Over the Operating Temperature and Supply Voltage Range (V_{DD} = 3.3V ± 5%)

Symbol	Parameter	Test Conditions	Min.	Max.	Unit
$\|I_{LI}\|$	Input Leakage Current	V_{DD} = Max., V_{IN} = 0V to V_{DD}	—	5	µA
$\|I_{LZZ}\|$	ZZ and $\overline{LBO}$ Input Leakage Current(1)	V_{DD} = Max., V_{IN} = 0V to V_{DD}	—	30	µA
$\|I_{LO}\|$	Output Leakage Current	V_{OUT} = 0V to V_{DDQ}, Device Deselected	—	5	µA
V_{OL}	Output Low Voltage	I_{OL} = +6mA, V_{DD} = Min.	—	0.4	V
V_{OH}	Output High Voltage	I_{OH} = -6mA, V_{DD} = Min.	2.0	—	V

5311 tbl 08

NOTE:
1. The $\overline{LBO}$ pin will be internally pulled to V_{DD} if it is not actively driven in the application and the ZZ pin will be internally pulled to V_{SS} if not actively driven.

DC Electrical Characteristics Over the Operating Temperature and Supply Voltage Range(1)

Symbol	Parameter	Test Conditions	166MHz	150MHz		133MHz		Unit
			Com'l Only	Com'l	Ind	Com'l	Ind	
I_{DD}	Operating Power Supply Current	Device Selected, Outputs Open, V_{DD} = Max., V_{DDQ} = Max., $V_{IN} \geq V_{IH}$ or $\leq V_{IL}$, f = f_{MAX}(2)	340	305	325	260	280	mA
I_{SB1}	CMOS Standby Power Supply Current	Device Deselected, Outputs Open, V_{DD} = Max., V_{DDQ} = Max., $V_{IN} \geq V_{HD}$ or $\leq V_{LD}$, f = 0(2,3)	50	50	70	50	70	mA
I_{SB2}	Clock Running Power Supply Current	Device Deselected, Outputs Open, V_{DD} = Max., V_{DDQ} = Max., $V_{IN} \geq V_{HD}$ or $\leq V_{LD}$, f = f_{MAX}(2,3)	160	155	175	150	170	mA
I_{ZZ}	Full Sleep Mode Supply Current	ZZ $\geq V_{HD}$, V_{DD} = Max.	50	50	70	50	70	mA

5311 tbl 09

NOTES:
1. All values are maximum guaranteed values.
2. At f = f_{MAX}, inputs are cycling at the maximum frequency of read cycles of 1/t_{CYC} while $\overline{ADSC}$ = LOW; f=0 means no input lines are changing.
3. For I/Os V_{HD} = V_{DDQ} - 0.2V, V_{LD} = 0.2V. For other inputs V_{HD} = V_{DD} - 0.2V, V_{LD} = 0.2V.

AC Test Conditions
(V_{DDQ} = 2.5V)

Input Pulse Levels	0 to 2.5V
Input Rise/Fall Times	2ns
Input Timing Reference Levels	V_{DDQ}/2
Output Timing Reference Levels	V_{DDQ}/2
AC Test Load	See Figure 1

5311 tbl 10

AC Test Load

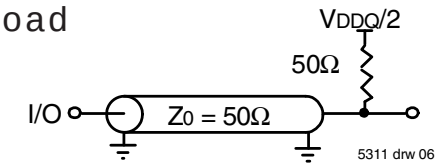


Figure 1. AC Test Load

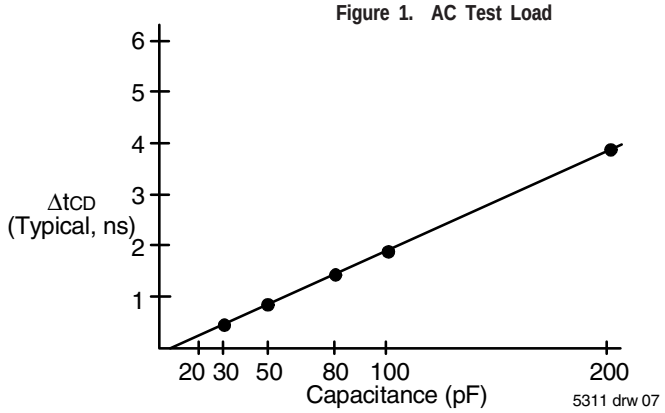


Figure 2. Lumped Capacitive Load, Typical Derating

© 2019 Renesas Electronics Corporation

Synchronous Truth Table(1,3)

Operation	Address Used	$\overline{CE}$	CS_0	$\overline{CS_1}$	$\overline{ADSP}$	$\overline{ADSC}$	$\overline{ADV}$	$\overline{GW}$	$\overline{BWE}$	$\overline{BWx}$	$\overline{OE}$ (2)	CLK	I/O
Deselected Cycle, Power Down	None	H	X	X	X	L	X	X	X	X	X	-	HI-Z
Deselected Cycle, Power Down	None	L	X	H	L	X	X	X	X	X	X	-	HI-Z
Deselected Cycle, Power Down	None	L	L	X	L	X	X	X	X	X	X	-	HI-Z
Deselected Cycle, Power Down	None	L	X	H	X	L	X	X	X	X	X	-	HI-Z
Deselected Cycle, Power Down	None	L	L	X	X	L	X	X	X	X	X	-	HI-Z
Read Cycle, Begin Burst	External	L	H	L	L	X	X	X	X	X	L	-	DOUT
Read Cycle, Begin Burst	External	L	H	L	L	X	X	X	X	X	H	-	HI-Z
Read Cycle, Begin Burst	External	L	H	L	H	L	X	H	H	X	L	-	DOUT
Read Cycle, Begin Burst	External	L	H	L	H	L	X	H	L	H	L	-	DOUT
Read Cycle, Begin Burst	External	L	H	L	H	L	X	H	L	H	H	-	HI-Z
Write Cycle, Begin Burst	External	L	H	L	H	L	X	H	L	L	X	-	DIN
Write Cycle, Begin Burst	External	L	H	L	H	L	X	L	X	X	X	-	DIN
Read Cycle, Continue Burst	Next	X	X	X	H	H	L	H	H	X	L	-	DOUT
Read Cycle, Continue Burst	Next	X	X	X	H	H	L	H	H	X	H	-	HI-Z
Read Cycle, Continue Burst	Next	X	X	X	H	H	L	H	X	H	L	-	DOUT
Read Cycle, Continue Burst	Next	X	X	X	H	H	L	H	X	H	H	-	HI-Z
Read Cycle, Continue Burst	Next	H	X	X	X	H	L	H	H	X	L	-	DOUT
Read Cycle, Continue Burst	Next	H	X	X	X	H	L	H	H	X	H	-	HI-Z
Read Cycle, Continue Burst	Next	H	X	X	X	H	L	H	X	H	L	-	DOUT
Read Cycle, Continue Burst	Next	H	X	X	X	H	L	H	X	H	H	-	HI-Z
Write Cycle, Continue Burst	Next	X	X	X	H	H	L	H	L	L	X	-	DIN
Write Cycle, Continue Burst	Next	X	X	X	H	H	L	L	X	X	X	-	DIN
Write Cycle, Continue Burst	Next	H	X	X	X	H	L	H	L	L	X	-	DIN
Write Cycle, Continue Burst	Next	H	X	X	X	H	L	L	X	X	X	-	DIN
Read Cycle, Suspend Burst	Current	X	X	X	H	H	H	H	H	X	L	-	DOUT
Read Cycle, Suspend Burst	Current	X	X	X	H	H	H	H	H	X	H	-	HI-Z
Read Cycle, Suspend Burst	Current	X	X	X	H	H	H	H	X	H	L	-	DOUT
Read Cycle, Suspend Burst	Current	X	X	X	H	H	H	H	X	H	H	-	HI-Z
Read Cycle, Suspend Burst	Current	H	X	X	X	H	H	H	H	X	L	-	DOUT
Read Cycle, Suspend Burst	Current	H	X	X	X	H	H	H	H	X	H	-	HI-Z
Read Cycle, Suspend Burst	Current	H	X	X	X	H	H	H	X	H	L	-	DOUT
Read Cycle, Suspend Burst	Current	H	X	X	X	H	H	H	X	H	H	-	HI-Z
Write Cycle, Suspend Burst	Current	X	X	X	H	H	H	H	L	L	X	-	DIN
Write Cycle, Suspend Burst	Current	X	X	X	H	H	H	L	X	X	X	-	DIN
Write Cycle, Suspend Burst	Current	H	X	X	X	H	H	H	L	L	X	-	DIN
Write Cycle, Suspend Burst	Current	H	X	X	X	H	H	L	X	X	X	-	DIN

5311 tbl 11

NOTES:
1. L = V_{IL}, H = V_{IH}, X = Don't Care.
2. $\overline{OE}$ is an asynchronous input.
3. ZZ = low for this table.

© 2019 Renesas Electronics Corporation

Synchronous Write Function Truth Table(1, 2)

Operation	$\overline{GW}$	$\overline{BWE}$	$\overline{BW_1}$	$\overline{BW_2}$	$\overline{BW_3}$	$\overline{BW_4}$
Read	H	H	X	X	X	X
Read	H	L	H	H	H	H
Write all Bytes	L	X	X	X	X	X
Write all Bytes	H	L	L	L	L	L
Write Byte 1(3)	H	L	L	H	H	H
Write Byte 2(3)	H	L	H	L	H	H
Write Byte 3(3)	H	L	H	H	L	H
Write Byte 4(3)	H	L	H	H	H	L

5311 tbl 12

NOTES:
1. L = V_{IL}, H = V_{IH}, X = Don't Care.
2. $\overline{BW_3}$ and $\overline{BW_4}$ are not applicable for the IDT71V67802.
3. Multiple bytes may be selected during the same cycle.

Asynchronous Truth Table(1)

Operation(2)	$\overline{OE}$	ZZ	I/O Status	Power
Read	L	L	Data Out	Active
Read	H	L	High-Z	Active
Write	X	L	High-Z – Data In	Active
Deselected	X	L	High-Z	Standby
Sleep Mode	X	H	High-Z	Sleep

5311 tbl 13

NOTES:
1. L = V_{IL}, H = V_{IH}, X = Don't Care.
2. Synchronous function pins must be biased appropriately to satisfy operation requirements.

Interleaved Burst Sequence Table ($\overline{LBO}$=V_{DD})

	Sequence 1		Sequence 2		Sequence 3		Sequence 4	
	A1	A0	A1	A0	A1	A0	A1	A0
First Address	0	0	0	1	1	0	1	1
Second Address	0	1	0	0	1	1	1	0
Third Address	1	0	1	1	0	0	0	1
Fourth Address(1)	1	1	1	0	0	1	0	0

5311 tbl 14

NOTE:
1. Upon completion of the Burst sequence the counter wraps around to its initial state.

Linear Burst Sequence Table ($\overline{LBO}$=V_{SS})

	Sequence 1		Sequence 2		Sequence 3		Sequence 4	
	A1	A0	A1	A0	A1	A0	A1	A0
First Address	0	0	0	1	1	0	1	1
Second Address	0	1	1	0	1	1	0	0
Third Address	1	0	1	1	0	0	0	1
Fourth Address(1)	1	1	0	0	0	1	1	0

5311 tbl 15

NOTE:
1. Upon completion of the Burst sequence the counter wraps around to its initial state.

© 2019 Renesas Electronics Corporation

AC Electrical Characteristics

(VDD = 3.3V ±5%, Commercial and Industrial Temperature Ranges)

Symbol	Parameter	166MHz		150MHz		133MHz		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
t_{CYC}	Clock Cycle Time	6	—	6.7	—	7.5	—	ns
t_{CH}(1)	Clock High Pulse Width	2.4	—	2.6	—	3	—	ns
t_{CL}(1)	Clock Low Pulse Width	2.4	—	2.6	—	3	—	ns
Output Parameters								
t_{CD}	Clock High to Valid Data	—	3.5	—	3.8	—	4.2	ns
t_{CDC}	Clock High to Data Change	1.5	—	1.5	—	1.5	—	ns
t_{CLZ}(2)	Clock High to Output Active	0	—	0	—	0	—	ns
t_{CHZ}(2)	Clock High to Data High-Z	1.5	3.5	1.5	3.8	1.5	4.2	ns
t_{OE}	Output Enable Access Time	—	3.5	—	3.8	—	4.2	ns
t_{OLZ}(2)	Output Enable Low to Output Active	0	—	0	—	0	—	ns
t_{OHZ}(2)	Output Enable High to Output High-Z	—	3.5	—	3.8	—	4.2	ns
Set Up Times								
t_{SA}	Address Setup Time	1.5	—	1.5	—	1.5	—	ns
t_{SS}	Address Status Setup Time	1.5	—	1.5	—	1.5	—	ns
t_{SD}	Data In Setup Time	1.5	—	1.5	—	1.5	—	ns
t_{SW}	Write Setup Time	1.5	—	1.5	—	1.5	—	ns
t_{SAV}	Address Advance Setup Time	1.5	—	1.5	—	1.5	—	ns
t_{SC}	Chip Enable/Select Setup Time	1.5	—	1.5	—	1.5	—	ns
Hold Times								
t_{HA}	Address Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HS}	Address Status Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HD}	Data In Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HW}	Write Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HAV}	Address Advance Hold Time	0.5	—	0.5	—	0.5	—	ns
t_{HC}	Chip Enable/Select Hold Time	0.5	—	0.5	—	0.5	—	ns
Sleep Mode and Configuration Parameters								
t_{ZZPW}	ZZ Pulse Width	100	—	100	—	100	—	ns
t_{ZZR}(3)	ZZ Recovery Time	100	—	100	—	100	—	ns
t_{CFG}(4)	Configuration Set-up Time	24	—	27	—	30	—	ns


5311 tbl 16

NOTES:

1. Measured as HIGH above V_{IH} and LOW below V_{IL}.
2. Transition is measured ±200mV from steady-state.
3. Device must be deselected when powered-up from sleep mode.
4. t_{CFG} is the minimum time required to configure the device based on the $\overline{LBO}$ input. $\overline{LBO}$ is a static input and must not change during normal operation.

© 2019 Renesas Electronics Corporation


Timing Waveform of Pipelined Read Cycle(1,2)

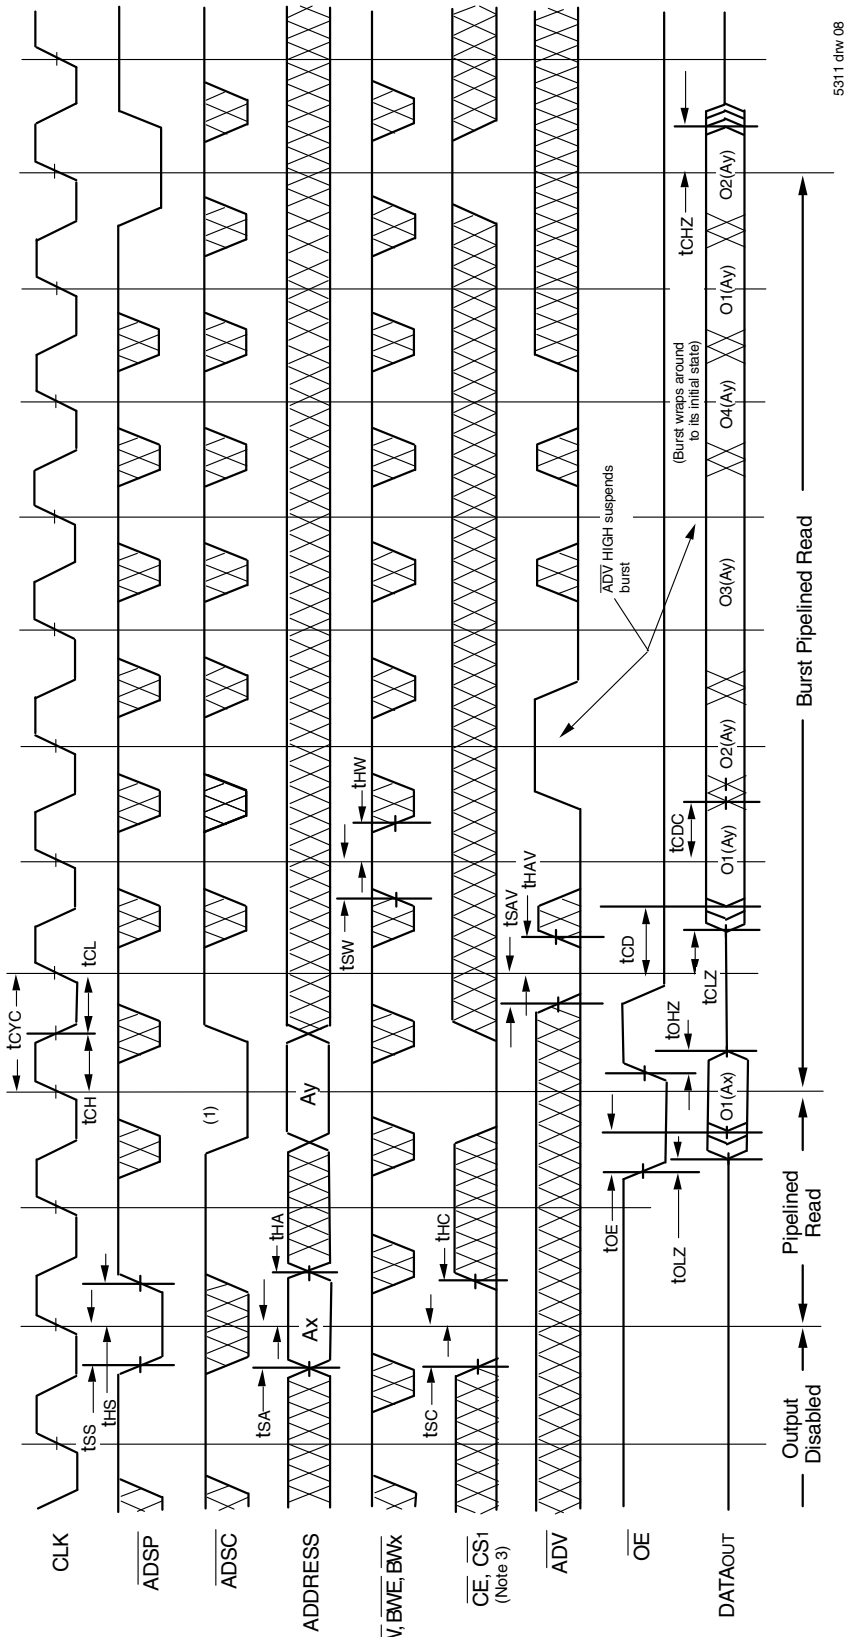

NOTES:
1. O1 (Ax) represents the first output from the external address Ax. O1 (Ay) represents the first output from the external address Ay; O2 (Ay) represents the next output data in the burst sequence of the base address Ay, etc. where A0 and A1 are advancing for the four word burst in the sequence defined by the state of the $\overline{LBO}$ input.
2. ZZ input is LOW and $\overline{LBO}$ is Don't Care for this cycle.
3. CS_0 timing transitions are identical but inverted to the $\overline{CE}$ and $\overline{CS_1}$ signals. For example, when $\overline{CE}$ and $\overline{CS_1}$ are LOW on this waveform, CS_0 is HIGH.

© 2019 Renesas Electronics Corporation


Timing Waveform of Combined Pipelined Read and Write Cycles(1,2,3)

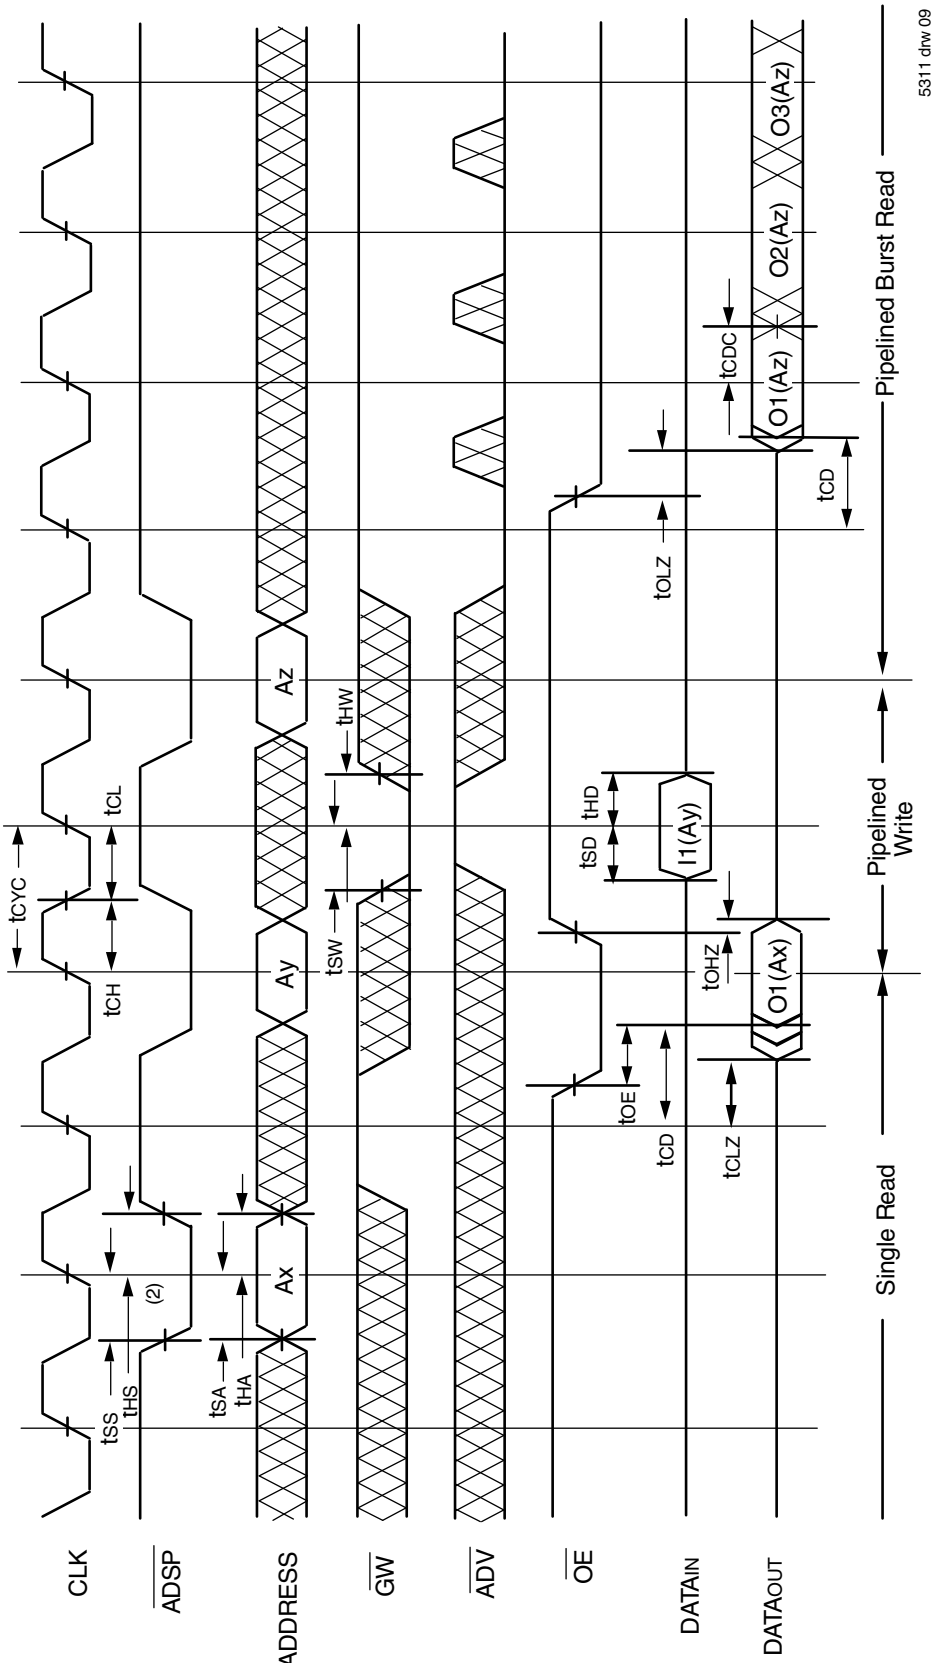

NOTES:
1. Device is selected through entire cycle; $\overline{CE}$ and $\overline{CS}_1$ are LOW, CS_0 is HIGH.
2. ZZ input is LOW and $\overline{LBO}$ is Don't Care for this cycle.
3. O1 (Ax) represents the first output from the external address Ax. I1 (Ay) represents the first input from the external address Ay; O1 (Az) represents the first output from the external address Az; O2 (Az) represents the next output data in the burst sequence of the base address Az, etc. where A0 and A1 are advancing for the four word burst in the sequence defined by the state of the $\overline{LBO}$ input.

© 2019 Renesas Electronics Corporation


Timing Waveform of Write Cycle No. 1 — $\overline{GW}$ Controlled(1,2,3)

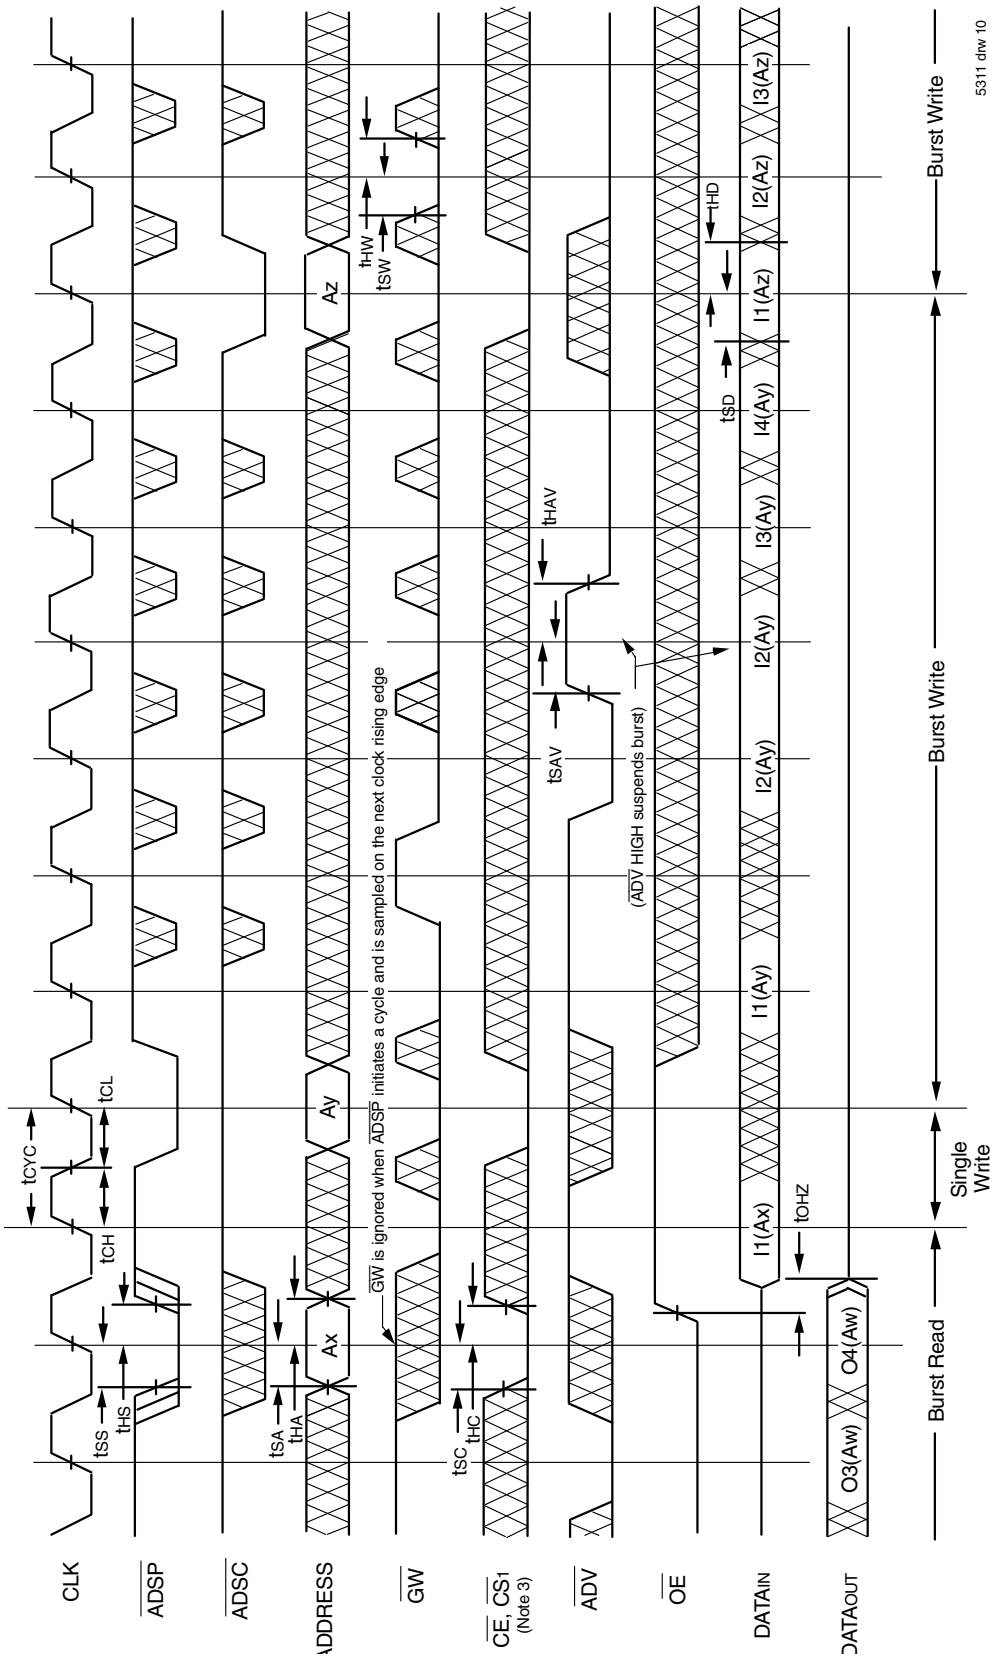

NOTES:
1. ZZ input is LOW, $\overline{BWE}$ is HIGH and $\overline{LBO}$ is Don't Care for this cycle.
2. O4 (Aw) represents the final output data in the burst sequence of the base address Aw. I1 (Ax) represents the first input from the external address Ax. I1 (Ay) represents the first input from the external address Ay; I2 (Ay) represents the next input data in the burst sequence of the base address Ay, etc. where A0 and A1 are advancing for the four word burst in the sequence defined by the state of the $\overline{LBO}$ input. In the case of input I2 (Ay) this data is valid for two cycles because $\overline{ADV}$ is high and has suspended the burst.
3. CS0 timing transitions are identical but inverted to the $\overline{CE}$ and $\overline{CS_1}$ signals. For example, when $\overline{CE}$ and $\overline{CS_1}$ are LOW on this waveform, CS0 is HIGH.

© 2019 Renesas Electronics Corporation


Timing Waveform of Write Cycle No. 2 — Byte Controlled(1,2,3)

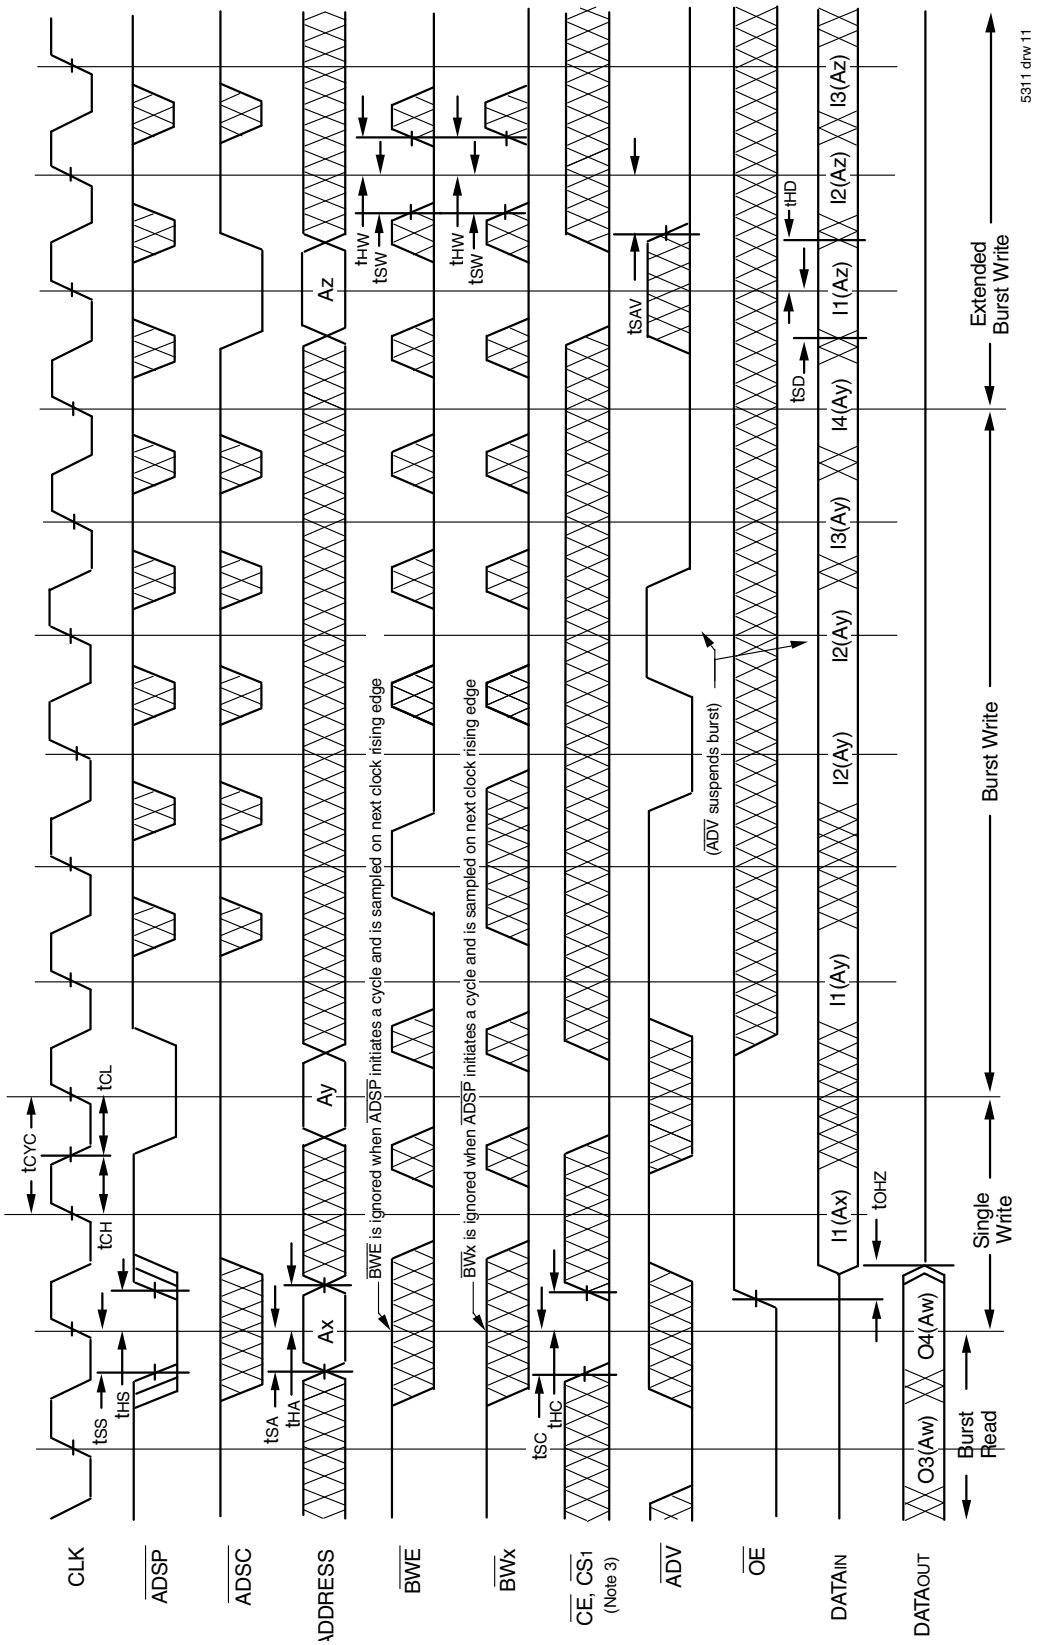

NOTES:
1. ZZ input is LOW, $\overline{GW}$ is HIGH and $\overline{LBO}$ is Don't Care for this cycle.
2. O4 (Aw) represents the final output data in the burst sequence of the base address Aw. I1 (Ax) represents the first input from the external address Ax. I1 (Ay) represents the first input from the external address Ay; I2 (Ay) represents the next input data in the burst sequence of the base address Ay, etc. where A0 and A1 are advancing for the four word burst in the sequence defined by the state of the $\overline{LBO}$ input. In the case of input I2 (Ay) this data is valid for two cycles because $\overline{ADV}$ is high and has suspended the burst.
3. CS_0 timing transitions are identical but inverted to the $\overline{CE}$ and $\overline{CS_1}$ signals. For example, when $\overline{CE}$ and $\overline{CS_1}$ are LOW on this waveform, CS_0 is HIGH.

© 2019 Renesas Electronics Corporation


Timing Waveform of Sleep (ZZ) and Power-Down Modes(1,2,3)

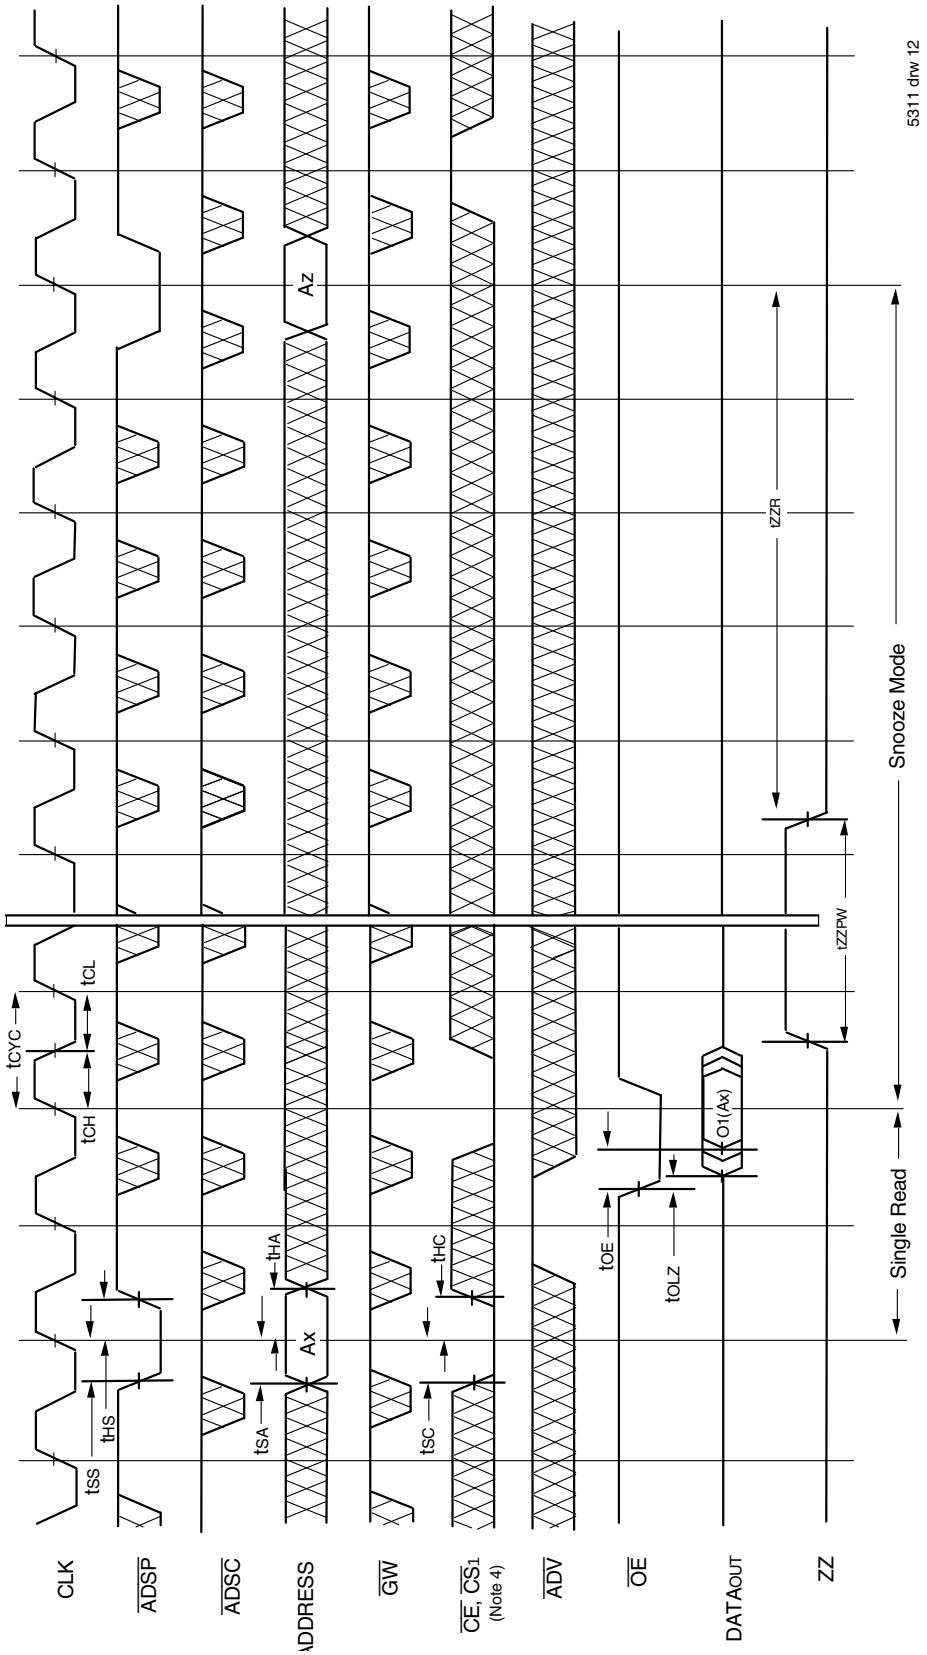

NOTES:
1. Device must power up in deselected Mode
2. $\overline{LBO}$ is Don't Care for this cycle.
3. It is not necessary to retain the state of the input registers throughout the Power-down cycle.
4. CS_0 timing transitions are identical but inverted to the $\overline{CE}$ and $\overline{CS}_1$ signals. For example, when CE and CS1 are LOW on this waveform, CS_0 is HIGH.

© 2019 Renesas Electronics Corporation


Non-Burst Read Cycle Timing Waveform

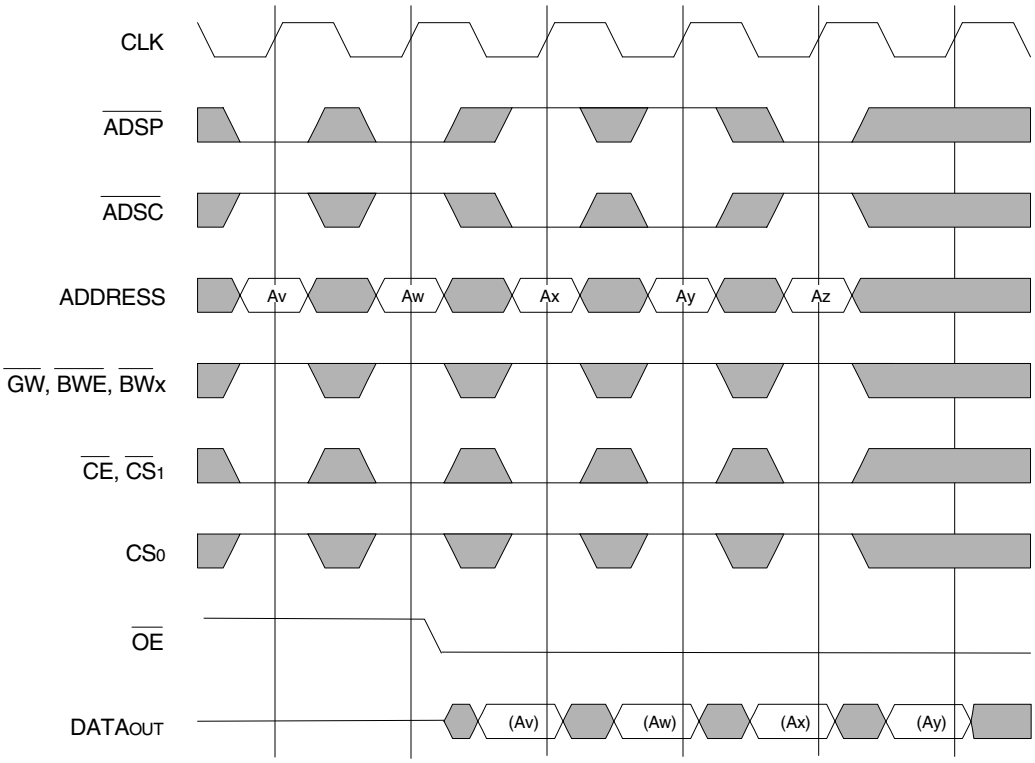

5311 drw 14

NOTES:
1. ZZ input is LOW, $\overline{ADV}$ is HIGH and $\overline{LBO}$ is Don't Care for this cycle.
2. (Ax) represents the data for address Ax, etc.
3. For read cycles, $\overline{ADSP}$ and $\overline{ADSC}$ function identically and are therefore interchangable.

Non-Burst Write Cycle Timing Waveform

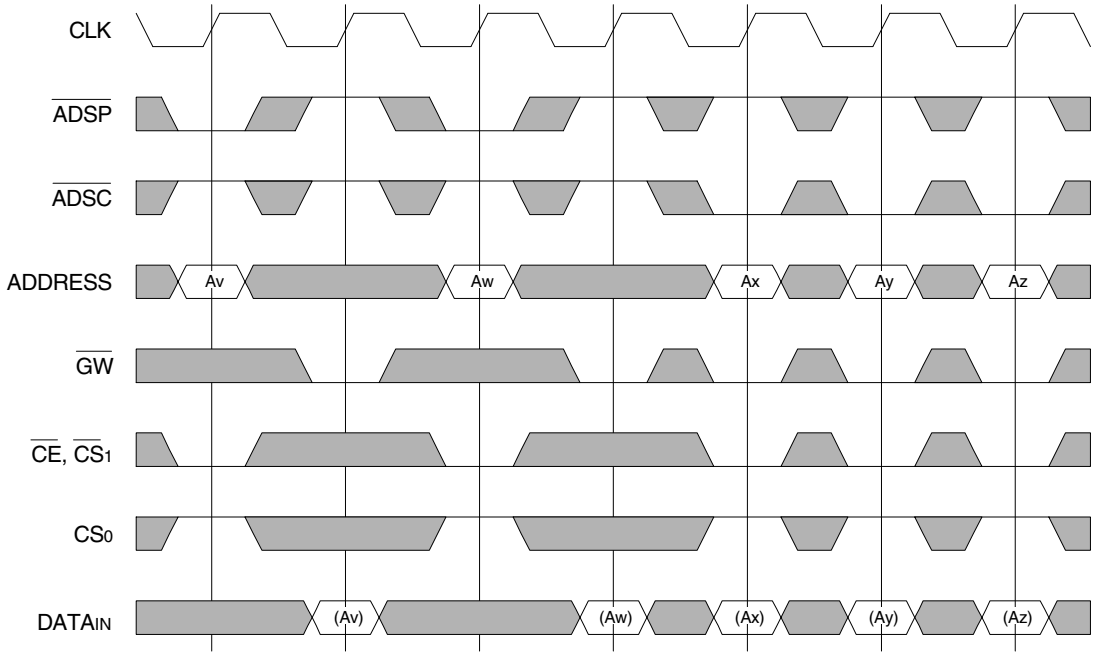


5311 drw 15

NOTES:
1. ZZ input is LOW, $\overline{ADV}$ and $\overline{OE}$ are HIGH, and $\overline{LBO}$ is Don't Care for this cycle.
2. (Ax) represents the data for address Ax, etc.
3. Although only $\overline{GW}$ writes are shown, the functionality of $\overline{BWE}$ and $\overline{BW}$x together is the same as $\overline{GW}$.
4. For write cycles, $\overline{ADSP}$ and $\overline{ADSC}$ have different limitations.

© 2019 Renesas Electronics Corporation


100-Pin Thin Plastic Quad Flatpack (TQFP) Package Diagram Outline

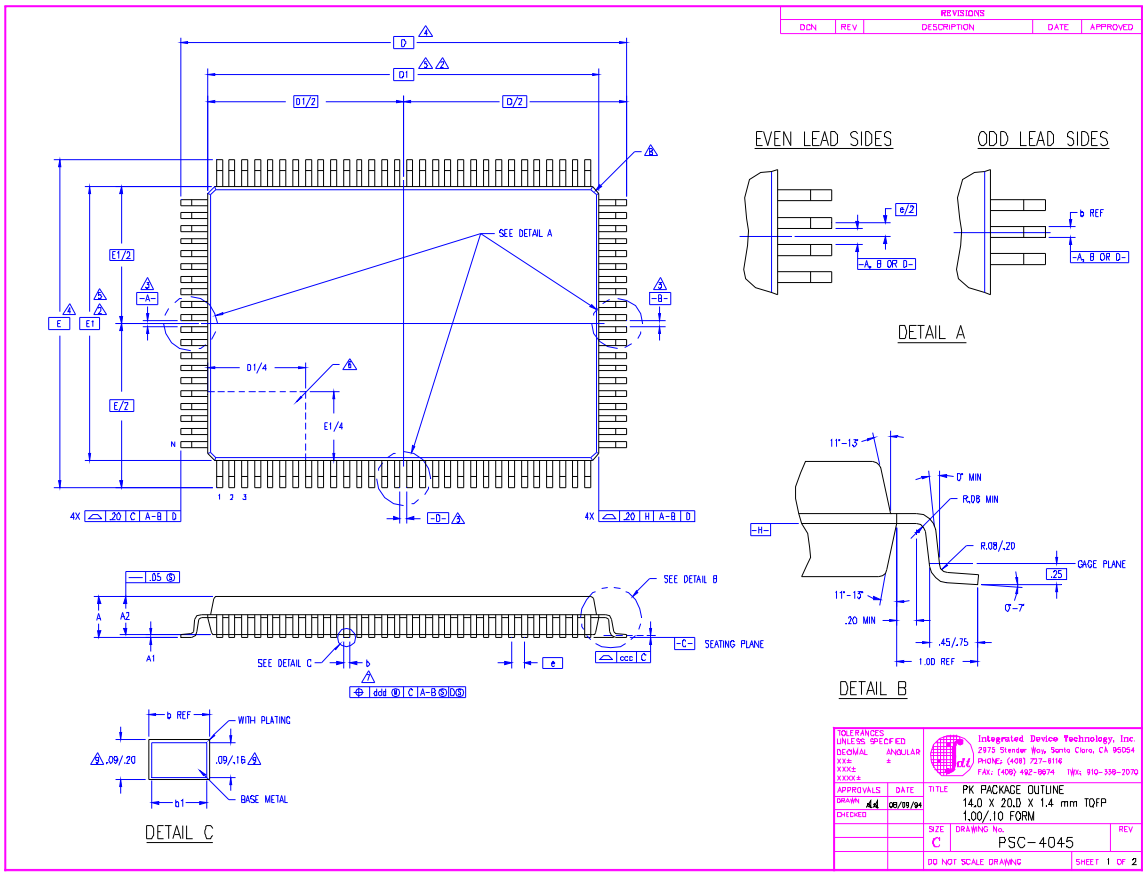

SYMBOL	JEDEC VARIATION DJ			NOTE
	MIN	NOM	MAX	
A	–	–	1.60	
A1	.05	.10	.15	
A2	1.35	1.40	1.45	
D		22.00 BSC		4
D1		20.00 BSC		5,2
E		16.00 BSC		4
E1		14.00 BSC		5,2
N		100		
ND		30		
NE		20		
e		.65 BSC		
b	.22	.32	.38	7
b1	.22	.30	.33	
ccc	–	–	.10	
ddd	–	–	.13	

NOTES:

1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M–1982
2. TOP PACKAGE MAY BE SMALLER THAN BOTTOM PACKAGE BY .15 mm
3. DATUMS [A-B] AND [-D-] TO BE DETERMINED AT DATUM PLANE [-H-]
4. DIMENSIONS D AND E ARE TO BE DETERMINED AT SEATING PLANE [-C-]
5. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE MOLD PROTRUSION IS .25 mm PER SIDE. D1 AND E1 ARE MAXIMUM BODY SIZE DIMENSIONS INCLUDING MOLD MISMATCH
6. DETAILS OF PIN 1 IDENTIFIER IS OPTIONAL BUT MUST BE LOCATED WITHIN THE ZONE INDICATED
7. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION IS .08 mm IN EXCESS OF THE b DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT.
8. EXACT SHAPE OF EACH CORNER IS OPTIONAL
9. THESE DIMENSIONS APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN .10 AND .25 mm FROM THE LEAD TIP
10. ALL DIMENSIONS ARE IN MILLIMETERS
11. THIS OUTLINE CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MO-136, VARIATION DJ AND BX

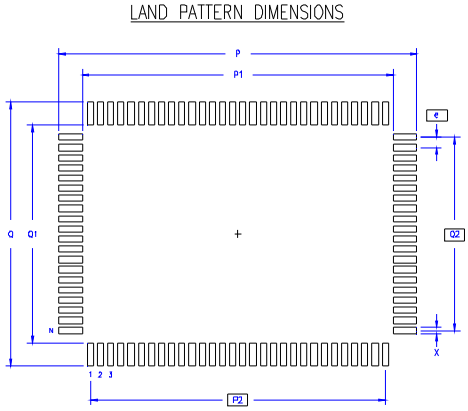


	MIN	MAX
P	22.80	23.00
P1	19.80	20.00
P2	18.85 BSC	
Q	16.80	17.00
Q1	13.80	14.00
Q2	12.35 BSC	
X	.30	.50
e	.65 BSC	
N	100	

REVISIONS
DCN REV DESCRIPTION DATE APPROVED
Integrated Device Technology, Inc.
2975 Stender Way, Santa Clara, CA 95054
PHONE: (408) 727-6116
FAX: (408) 492-8674
TITLE PK PACKAGE OUTLINE
14.0 X 20.0 X 1.4 mm TQFP
1.00/.10 FORM
SIZE C
DRAWING No. PSC-4045
REV
DO NOT SCALE DRAWING
SHEET 2 OF 2

© 2019 Renesas Electronics Corporation


119 Ball Grid Array (BGA) Package Diagram Outline

REVISIONS				
DCN	REV	DESCRIPTION	DATE	APPROVED
60626	00	INITIAL RELEASE	10/15/97	T. VU
	01	SWITCH E & D DIMENSIONS	04/25/00	

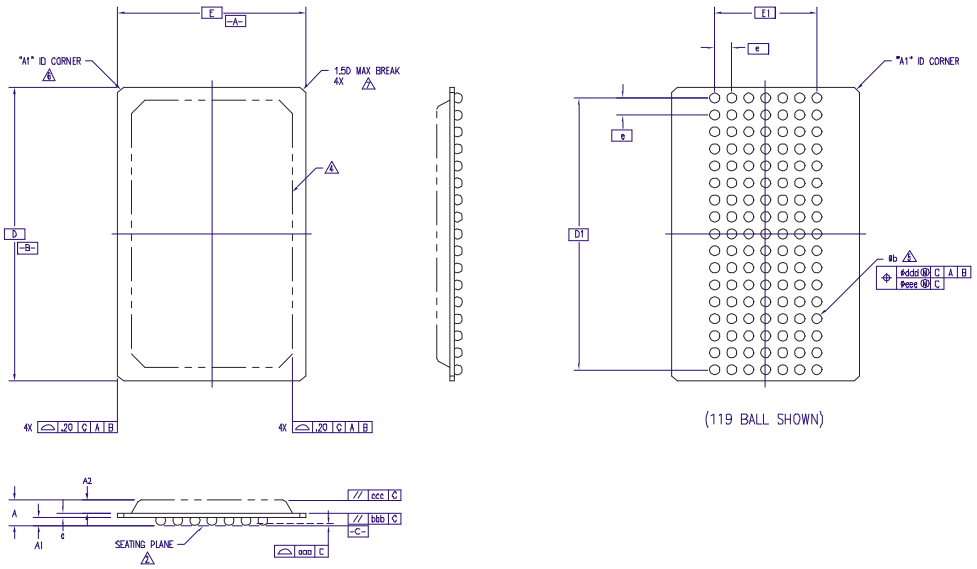

TOLERANCES UNLESS SPECIFIED		Integrated Device Technology, Inc. 2975 Stender Way, Santa Clara, CA 95054 PHONE: (408) 727-6116 FAX: (408) 492-8674 TWX: 910-338-2070	
DECIMAL ANGULAR XX± ± XXX± XXXX±			
APPROVALS	DATE	TITLE	BG PACKAGE OUTLINE 14.0 X 22.0 mm BODY PBGA
DRAWN JTP	10/15/97		
CHECKED		SIZE C	DRAWING No. PSC-4063 REV 01
		DO NOT SCALE DRAWING	SHEET 1 OF 2

REVISIONS				
DCN	REV	DESCRIPTION	DATE	APPROVED
60626	00	INITIAL RELEASE	10/15/97	T. VU
	01	SWITCH E & D DIMENSIONS	04/25/00	T. VU
	02	CHANGE PACKAGE THICKNESS	08/05/00	



SYMBOL	JEDEC VARIATION AA			NOTE
	MIN	NOM	MAX	
A	–	2.15	2.36	
A1	.50	.60	.70	
A2	–	–	1.20	
D	22.00 BSC			
D1	20.32 BSC			
E	14.00 BSC			
E1	7.62 BSC			
MD	17			3
ME	7			3
N	119			3
e	1.27 BSC			
b	.60	.75	.90	5
c	.51	.56	.61	
aaa	–	–	.15	
bbb	–	–	.25	
ccc	–	–	.35	
ddd	–	–	.30	
eee	–	–	.10	


NOTES:


1. ALL DIMENSIONING AND TOLERANCING CONFORM TO ANSI Y14.5M-1982
2. SEATING PLANE AND PRIMARY DATUM -C- ARE DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS
3. "MD" IS THE BALL MATRIX SIZE IN THE "D" DIRECTION
   "ME" IS THE BALL MATRIX SIZE IN THE "E" DIRECTION
   "N" IS THE MAXIMUM ALLOWABLE NUMBER OF SOLDER BALLS
4. PACKAGE MAY EXTEND TO EDGE PERIPHERY AND MAY CONSIST OF MOLDING COMPOUND, EPOXY, METAL, CERAMIC OR OTHER MATERIAL
5. DIMENSION "b" IS MEASURED AT THE MAXIMUM SOLDER BALL DIAMETER, PARALLEL TO PRIMARY DATUM -C-
6. "A1" ID CORNER MUST BE IDENTIFIED. IDENTIFICATION MAY BE BY MEANS OF CHAMFER, METALLIZED OR INK MARK, INDENTATION OR OTHER FEATURE OF THE PACKAGE BODY. MARK MUST BE VISIBLE FROM TOP SURFACE
7. ACTUAL SHAPE OF THIS FEATURE IS OPTIONAL
8. ALL DIMENSIONS ARE IN MILLIMETERS
9. THIS DRAWING CONFORMS TO JEDEC PUBLICATION 95 REGISTRATION MS-028, VARIATION AA

TOLERANCES UNLESS SPECIFIED		Integrated Device Technology, Inc. 2975 Stender Way, Santa Clara, CA 95054 PHONE: (408) 727-6116 FAX: (408) 492-8674 TWX: 910-338-2070	
DECIMAL ANGULAR XX± ± XXX± XXXX±			
APPROVALS	DATE	TITLE	BG PACKAGE OUTLINE 14.0 X 22.0 mm BODY PBGA
DRAWN JTP	10/15/97		
CHECKED		SIZE C	DRAWING No. PSC-4063 REV 02
		DO NOT SCALE DRAWING	SHEET 2 OF 2

© 2019 Renesas Electronics Corporation

165 Fine Pitch Ball Grid Array (fBGA) Package Diagram Outline

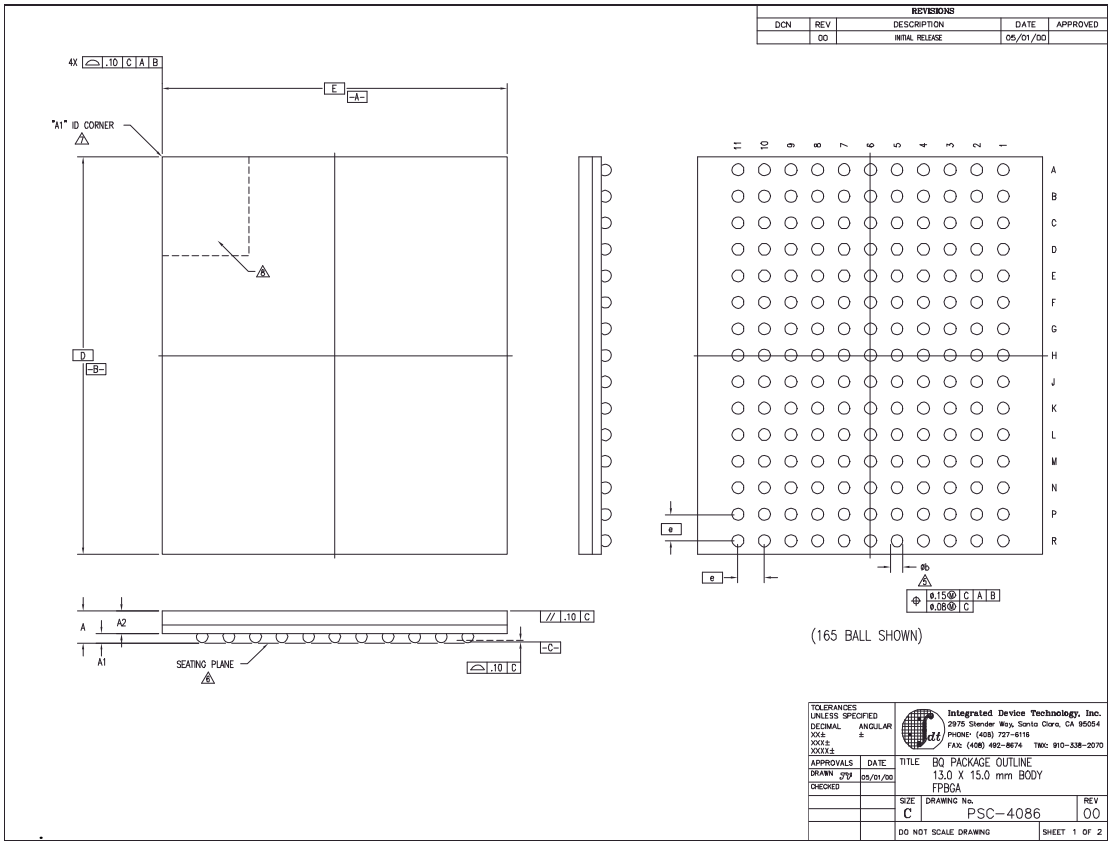


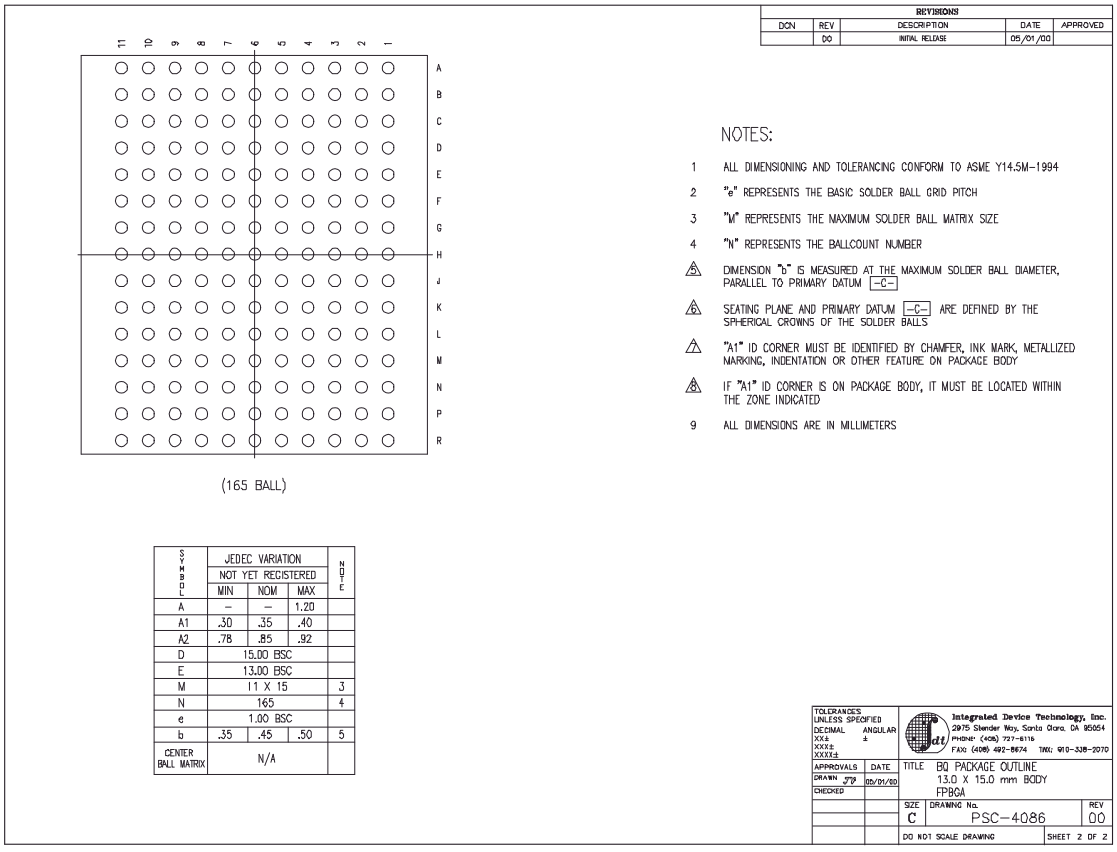

SYMBOL	JEDEC VARIATION NOT YET REGISTERED			NOTE
	MIN	NOM	MAX	
A	–	–	1.20	
A1	.30	.35	.40	
A2	.78	.85	.92	
D	15.00 BSC			
E	13.00 BSC			
M	11 X 15			3
N	165			4
e	1.00 BSC			
b	.35	.45	.50	5
CENTER BALL MATRIX	N/A			

© 2019 Renesas Electronics Corporation

Ordering Information

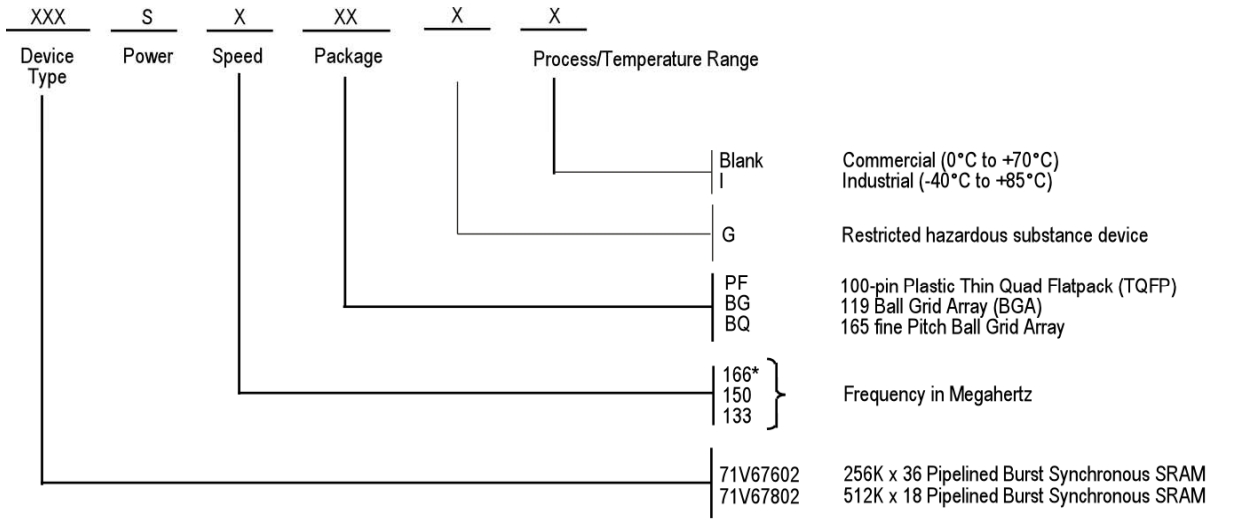

* Industrial temperature not available on 166MHz devices

© 2019 Renesas Electronics Corporation

Datasheet Document History

12/31/99		Created datasheet from 71V676 and 71V678 datasheets. I/O voltage and speed grade offerings have been split into separate part numbers. See the following datasheets for: 3.3V I/O, 133–166MHz 71V67603 2.5V I/O, 133–166MHz 71V67602 3.3V I/O, 183–200MHz 71V67613 2.5V I/O, 183–200MHz 71V67612
04/26/00	Pg. 4	Add capacitance for BGA package; Insert clarification note to Absolute Max Ratings and Recommended Operating Temperature tables.
	Pg. 7	Replace Pin U6 with $\overline{TRST}$ pin in BGA pin configuration; Add pin description note in pinout
	Pg. 18	Inserted 100 pin TQFP Package Diagram Outline
05/24/00	Pg. 1,4,8,21 22	Add new package offering, 13 x 15 fBGA
	Pg. 5,6,7,8	Correct note 2 on BGA and TQFP pin configuration
	Pg. 20	Correction in the 119 BGA Package Diagram Outline
07/12/00	Pg. 5,6,8	Remove note from TQFP and BQ165 pinouts
	Pg. 7	Remove/Add reference note from BG119 pinout
	Pg. 20	Update BG119 Package Diagram Outline
08/27/02	Pg. 4,9,12 22	Added Industrial information to the datasheet.
10/28/02	Pg. 1-23	Changed datasheet from Advanced Information to Final Release.
11/19/02	Pg. 1,9,12,22	Added 166MHz to datasheet.
04/15/03	Pg .4	Updated 165fBGA table from TBD to 7.
12/20/03	Pg. 7	Updated 119BGA pin configurations- reordered I/O signals on P6, P7 (128K x 36) and P7, N6, L6, K7, H6, G7, F6,E7, D6 (256K x 18).
07/11/06	Pg.22	Added “Restricted hazardous substance device” to ordering information
02/27/09	Pg 22	Removed IDT from the orderable part number

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2020 Renesas Electronics Corporation. All rights reserved.