



光谱图

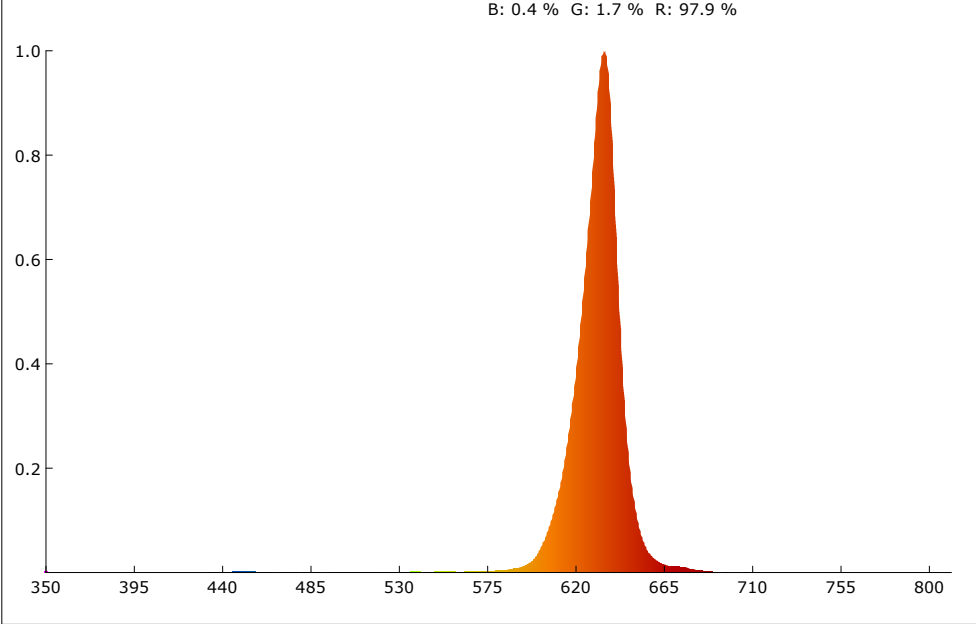

SDCM

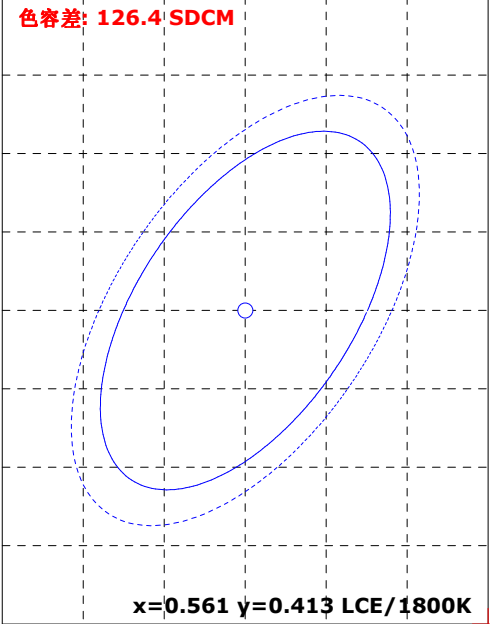

颜色参数:

坐标x: 0.6905 坐标y: 0.3025 坐标u: 0.5262 坐标v: 0.3458 坐标u': 0.5262 坐标v': 0.5187
红色比: 97.9 % 绿色比: 1.7 % 蓝色比: 0.4 % 光通量红色比: 94.4 % 光通量绿色比: 5.5 % 光通量蓝色比: 0.1 %

显色指数: 36.9 AvgR: 33.1
R1: 31.1 R2: 86.9 R3: 51.5 R4: 19.8 R5: 40.3 R6: 86.9 R7: 18.5 R8: -39.6
R9: -99.0 R10: 85.0 R11: 44.0 R12: 54.1 R13: 51.2 R14: 73.6 R15: -7.6


色温: 1000 K	光通量: 49.649 lm	峰值波长: 634.5 nm	色容差: 126.4
明暗视觉比: 0.1	中心波长: 632.9 nm	主波长: 623.5 nm	质心波长: 630.4 nm
半宽度: 19.1 nm	色偏差: 0.15629	色纯度: 97.9 %	色质指数: -nan(ind)
LER(TM-30): 181.0	辐射功率: 274.3 mw	色域指数(Rg): 136.9	逼真度(Rf): 12.4
红光辐射功率: 268.3 mw	近红辐射功率: 0.1 mw	远红辐射功率: 0.0 mw	

电参数:







光效: 3.0 Lm/W	能效: 3.2	能效等级: G	
电压: 220.7 V	电流: 0.142 A	功率: 16.770 W	功率因素: 0.534

产品型号:	制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号:	测试单位:
测试人员:	测试日期:03/31/13
备注:	

Rf: 12.4 CCT: 1000K
Rg: 136.9 LER: 181.0 Duv: 0.15

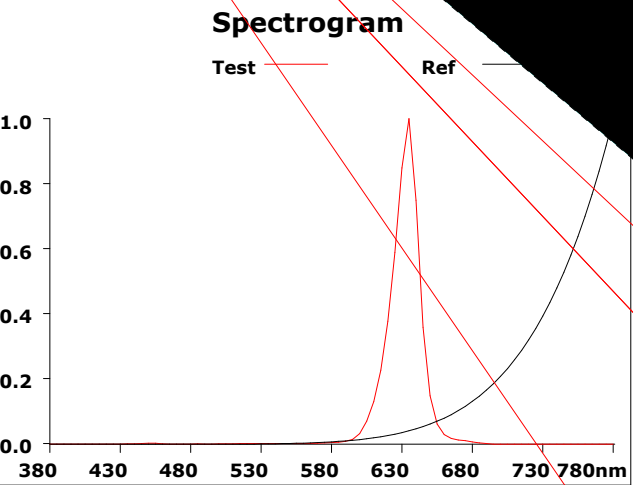

500			
Hue Bin	Rf	Chroma	Hue
1	3.1	-52.1%	58.6%
2	13.3	7.7%	146.4%
3	31.7	126.6%	163.8%
4	59.0	nan%	-nan(ind)%
5	44.5	0%	-12.4%
6	23.3	nan(ind)%	1%
7	28.4	nan(ind)%	1%
8	26.1	nan(ind)%	1%
9	53.1	nan(ind)%	1%
10	45.2	nan(ind)%	1%
11	19.1	47.1%	1%
12	1.9	36.1%	1%
13	58.1	-30.0%	1%
14	4.8	-51.5%	-2.8%
15	4.8	-51.5%	-2.8%
16	4.8	-51.5%	-2.8%

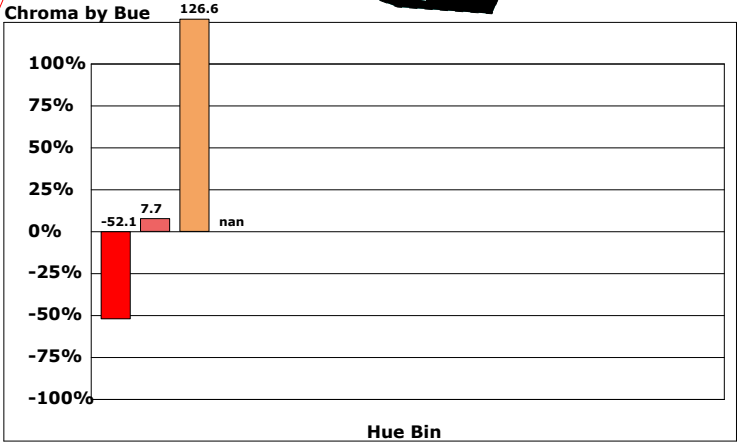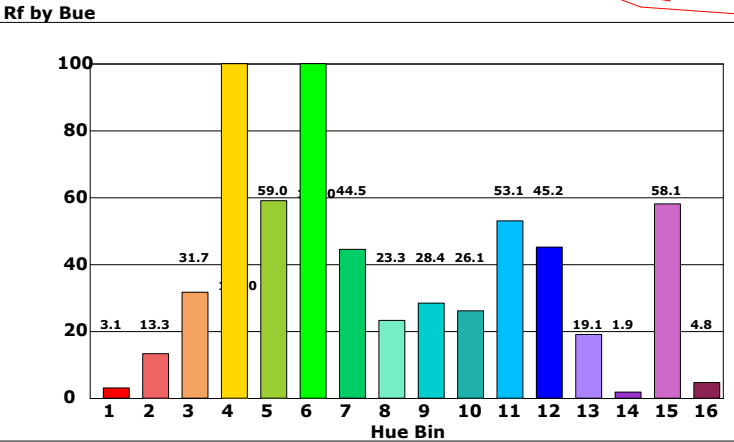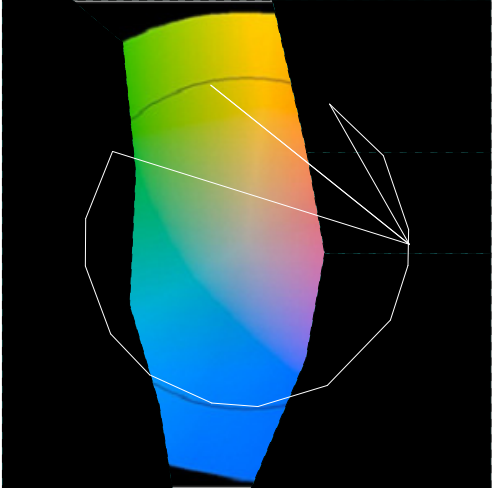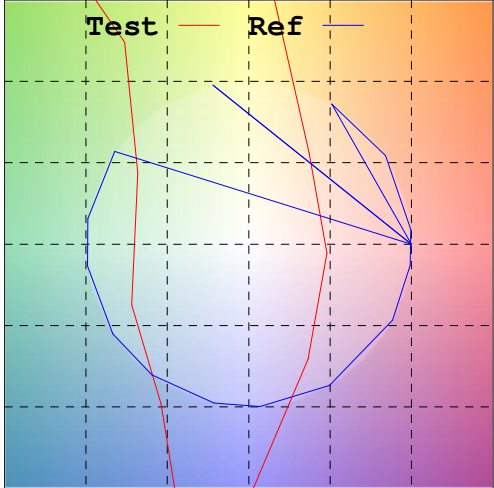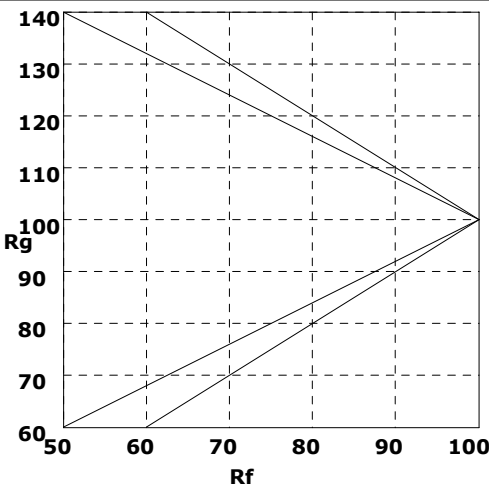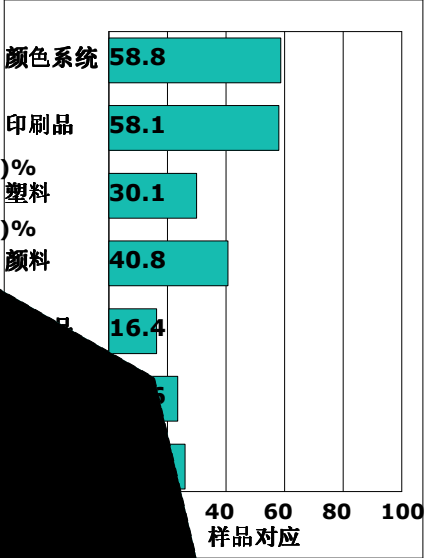

ERROR: undefined
OFFENDING COMMAND: -214747841rp

STACK:

-2.14748e+010
3173