



光谱图

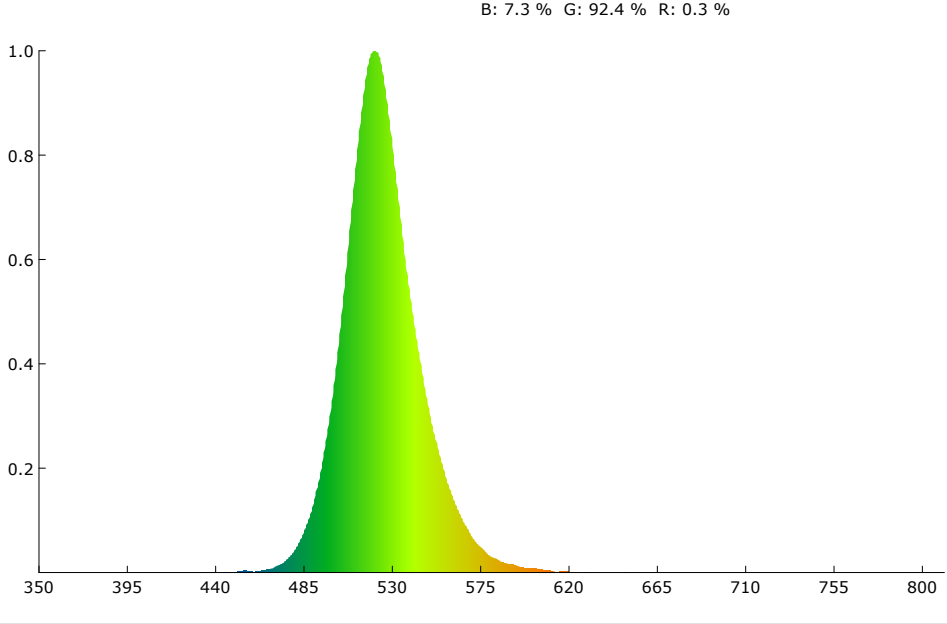

SDCM

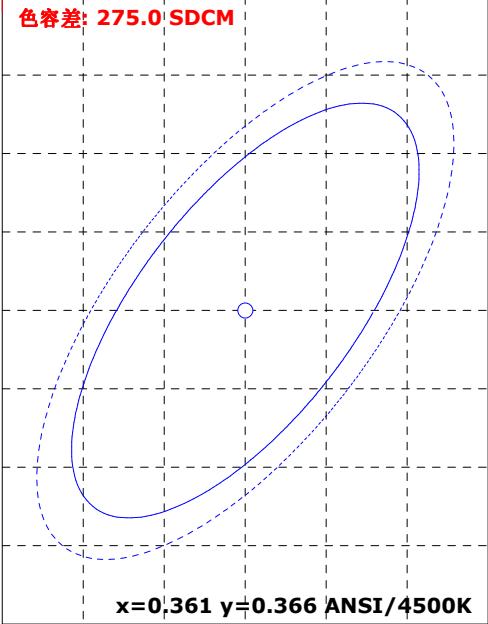

颜色参数:

坐标x: 0.1728 坐标y: 0.7213 坐标u: 0.0611 坐标v: 0.3827 坐标u': 0.0611 坐标v': 0.5741
红色比: 0.3 % 绿色比: 92.4 % 蓝色比: 7.3 % 光通量红色比: 0.2 % 光通量绿色比: 99.2 % 光通量蓝色比: 0.6 %

显色指数: -22.8 AvgR: -35.8
R1: -35.5 R2: -7.4 R3: -18.6 R4: -66.7 R5: -10.9 R6: -11.1 R7: -2.0 R8: -30.9
R9: -99.0 R10: -99.0 R11: -95.5 R12: -26.3 R13: -41.0 R14: 40.7 R15: -34.1


色温: 7819 K 光通量: 119.322 lm 峰值波长: 521.6 nm 色容差: 275.0
明暗视觉比: 2.8 中心波长: 522.8 nm 主波长: 527.3 nm 质心波长: 525.5 nm
半宽度: 35.4 nm 色偏差: 0.15629 色纯度: 80.1 % 色质指数: 0.3
LER(TM-30): 491.0 辐射功率: 243.0 mw 色域指数(Rg): 8.1 逼真度(Rf): 0.9
红光辐射功率: 0.8 mw 近红辐射功率: 0.0 mw 远红辐射功率: 0.0 mw

电参数:



光效: 5.6 Lm/W 能效: 6.1 能效等级: G
电压: 220.7 V 电流: 0.175 A 功率: 21.130 W 功率因素: 0.545

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:


Rf: 0.9 CCT: 7819K u': 0.0611
Rg: 8.1 LER: 491.0 Duv: 0.15629 v': 0.5741

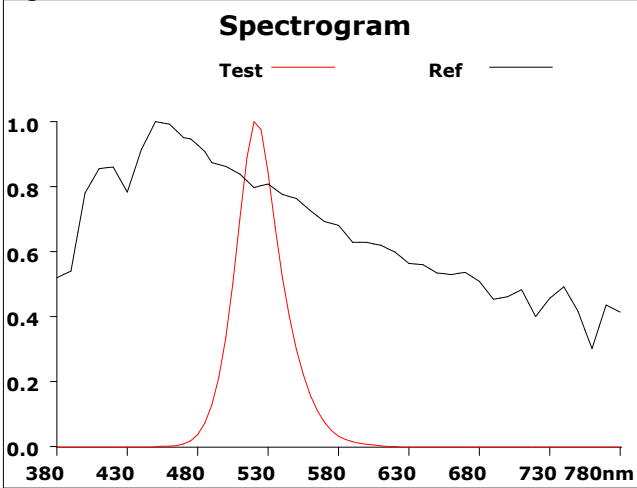


500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-86.0%	0.3%
2	0.0	-72.3%	5.7%
3	0.3	-75.0%	-1.4%
4	3.5	-58.2%	-7.0%
5	1.3	-72.2%	-1.3%
6	0.6	-80.3%	0.5%
7	0.4	-75.3%	8.1%
8	0.0	-79.1%	11.1%
9	15.0	-63.8%	32.1%
10	18.0	-47.0%	23.8%
11	3.7	-46.0%	5.6%
12	27.5	-43.2%	-19.3%
13	22.0	-53.5%	-25.2%
14	0.2	-65.5%	-40.3%
15	2.7	-79.1%	-49.0%
16	0.0	-82.1%	-19.3%

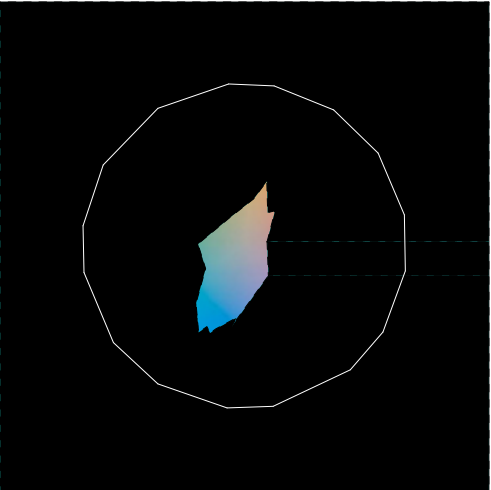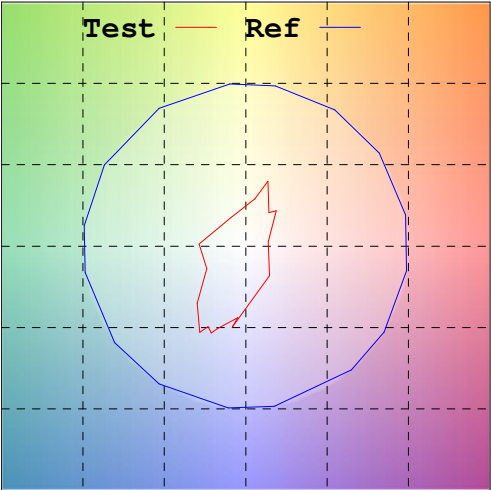

Rf by Bue

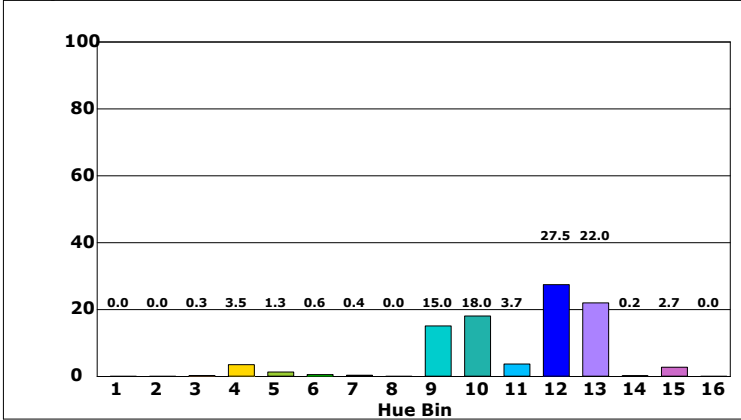

Chroma by Bue

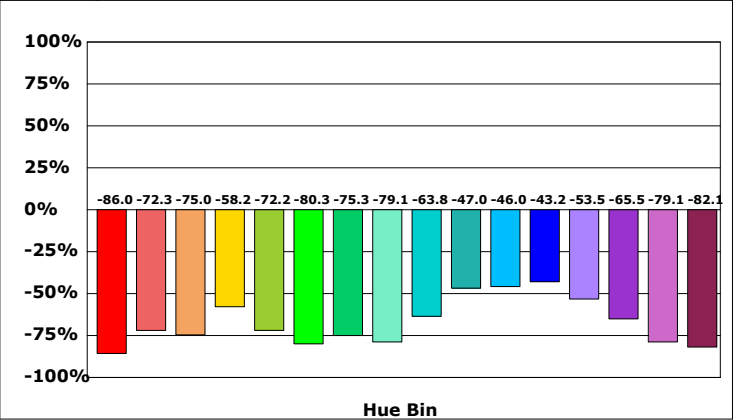

产品型号:
产品编号:
测试人员:
备注:

制造厂商:Guangzhou Hotion Technology Co., Ltd
测试单位:
测试日期:03/31/13

