



光谱图

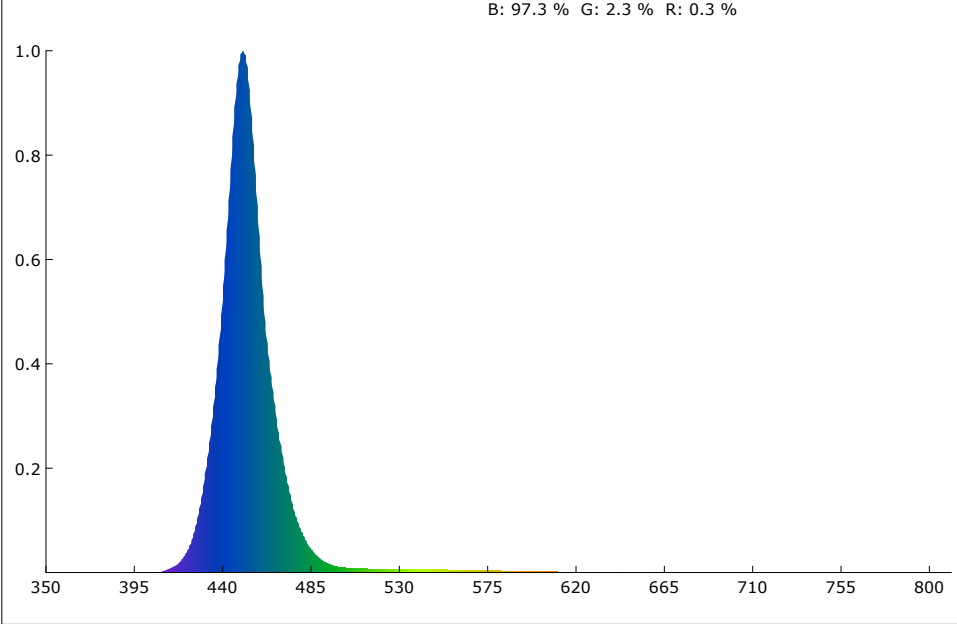

SDCM

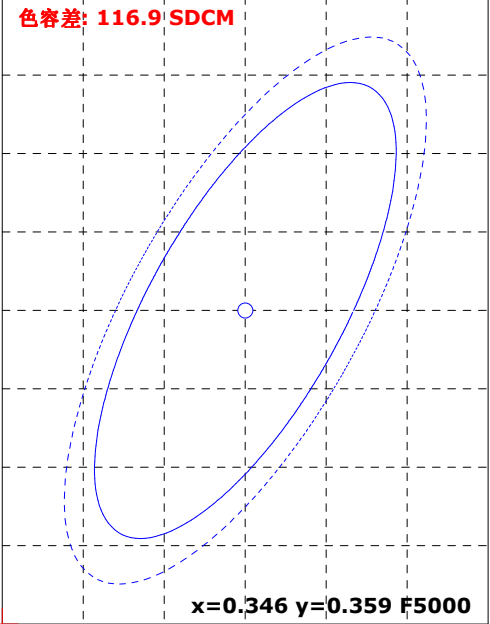

颜色参数:

坐标x: 0.1551 坐标y: 0.0344 坐标u: 0.2000 坐标v: 0.0665 坐标u': 0.2000 坐标v': 0.0997
红色比: 0.3 % 绿色比: 2.3 % 蓝色比: 97.3 % 光通量红色比: 1.9 % 光通量绿色比: 29.4 % 光通量蓝色比: 68.8 %

显色指数: -47.1 AvgR: -45.9
R1: 20.5 R2: -25.6 R3: -99.0 R4: -99.0 R5: 28.1 R6: -30.7 R7: -57.2 R8: -50.2
R9: -99.0 R10: -99.0 R11: -99.0 R12: -85.9 R13: 11.3 R14: -33.8 R15: 30.4


色温: 99999 K 光通量: 26.608 lm 峰值波长: 450.6 nm 色容差: 116.9
明暗视觉比: 17.7 中心波长: 451.0 nm 主波长: 456.4 nm 质心波长: 454.9 nm
半宽度: 21.4 nm 色偏差: 0.06304 色纯度: 96.8 % 色质指数: 0.2
LER(TM-30): 45.8 辐射功率: 581.4 mw 色域指数(Rg): nan 逼真度(Rf): -nan(ind)
红光辐射功率: 1.9 mw 近红辐射功率: 0.0 mw 远红辐射功率: 0.0 mw

电参数:


光效: 1.3 lm/W 能效: 1.4 能效等级: G
电压: 220.7 V 电流: 0.167 A 功率: 20.110 W 功率因素: 0.543

产品型号: 制造厂商:Guangzhou Hotion Technology Co., Ltd
产品编号: 测试单位:
测试人员: 测试日期:03/31/13
备注:

Rf: -nan(ind) CCT: 99999K u': 0.2000
Rg: nan LER: 45.8 Duv: 0.06304 v': 0.0997

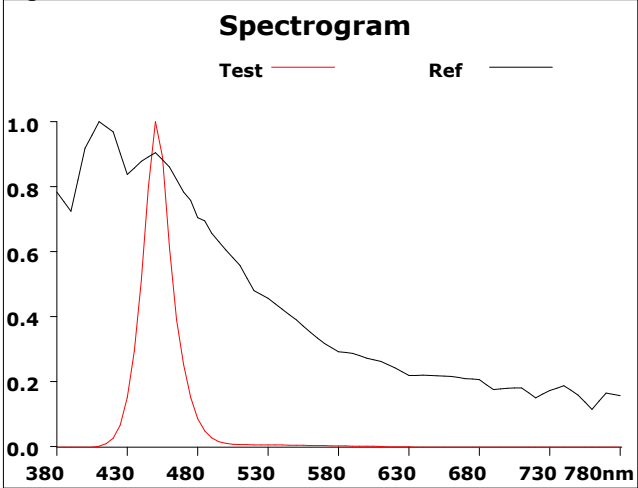

500			
Hue Bin	Rf	Chroma	Hue
1	0.0	-188.9%	63.2%
2	9.1	12.7%	-13.7%
3	-nan(ind)	nan%	-nan(ind)%
4	-nan(ind)	nan%	-nan(ind)%
5	-nan(ind)	nan%	-nan(ind)%
6	-nan(ind)	nan%	-nan(ind)%
7	-nan(ind)	nan%	-nan(ind)%
8	-nan(ind)	nan%	-nan(ind)%
9	-nan(ind)	nan%	-nan(ind)%
10	-nan(ind)	nan%	-nan(ind)%
11	0.0	38.1%	-242.0%
12	0.0	-52.4%	-379.4%
13	0.0	-206.2%	-343.3%
14	0.0	-322.5%	-269.2%
15	0.0	-451.9%	-187.3%
16	0.0	-363.2%	-2.7%

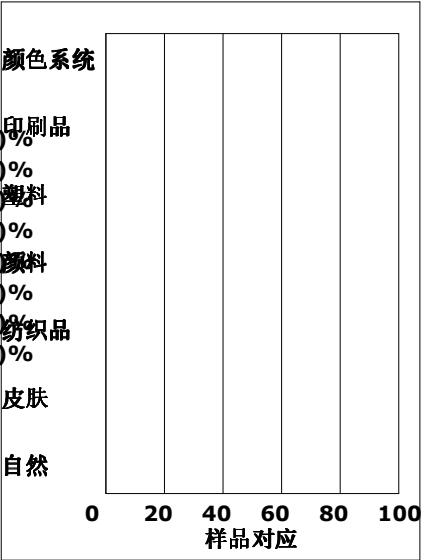

ERROR: rangecheck
OFFENDING COMMAND: roll

STACK:

2
4
-2.14748e+011
-2.14748e+012