3.3V CMOS 32-BIT EDGE-TRIGGERED D-TYPE FLIP-FLOP WITH 3-STATE OUTPUTS AND BUS-HOLD

IDT74ALVCH32374

FEATURES:

- 0.5 MICRON CMOS Technology
- Typical $t_{SK(o)}$ (Output Skew) < 250ps
- ESD > 2000V per MIL-STD-883, Method 3015; > 200V using machine model (C = 200pF, R = 0)
- Vcc = 3.3V ± 0.3V, Normal Range
- Vcc = 2.7V to 3.6V, Extended Range
- Vcc = 2.5V ± 0.2V
- CMOS power levels (0.4µ W typ. static)
- Rail-to-Rail output swing for increased noise margin
- Available in 96-ball LFBGA package

DRIVE FEATURES:

- High Output Drivers: ±24mA
- Suitable for Heavy Loads

APPLICATIONS:

- 3.3V high speed systems
- 3.3V and lower voltage computing systems


DESCRIPTION:

This 32-bit edge-triggered D-type flip-flop is built using advanced dual metal CMOS technology. This high-speed, low-power register is ideal for use as a buffer register for data synchronization and storage. The Output Enable ($\overline{OE}$) and clock (CLK) controls are organized to operate the device as four 8-bit registers, two 16-bit registers, or one 32-bit register with common clock. Flow-through organization of signal pins simplifies layout. All inputs are designed with hysteresis for improved noise margin.

The ALVCH32374 has been designed with a ±24mA output driver. This driver is capable of driving a moderate to heavy load while maintaining speed performance.

The ALVCH32374 has "bus-hold" which retains the inputs' last state whenever the input goes to a high impedance. This prevents floating inputs and eliminates the need for pull-up/down resistor.

FUNCTIONAL BLOCK DIAGRAM

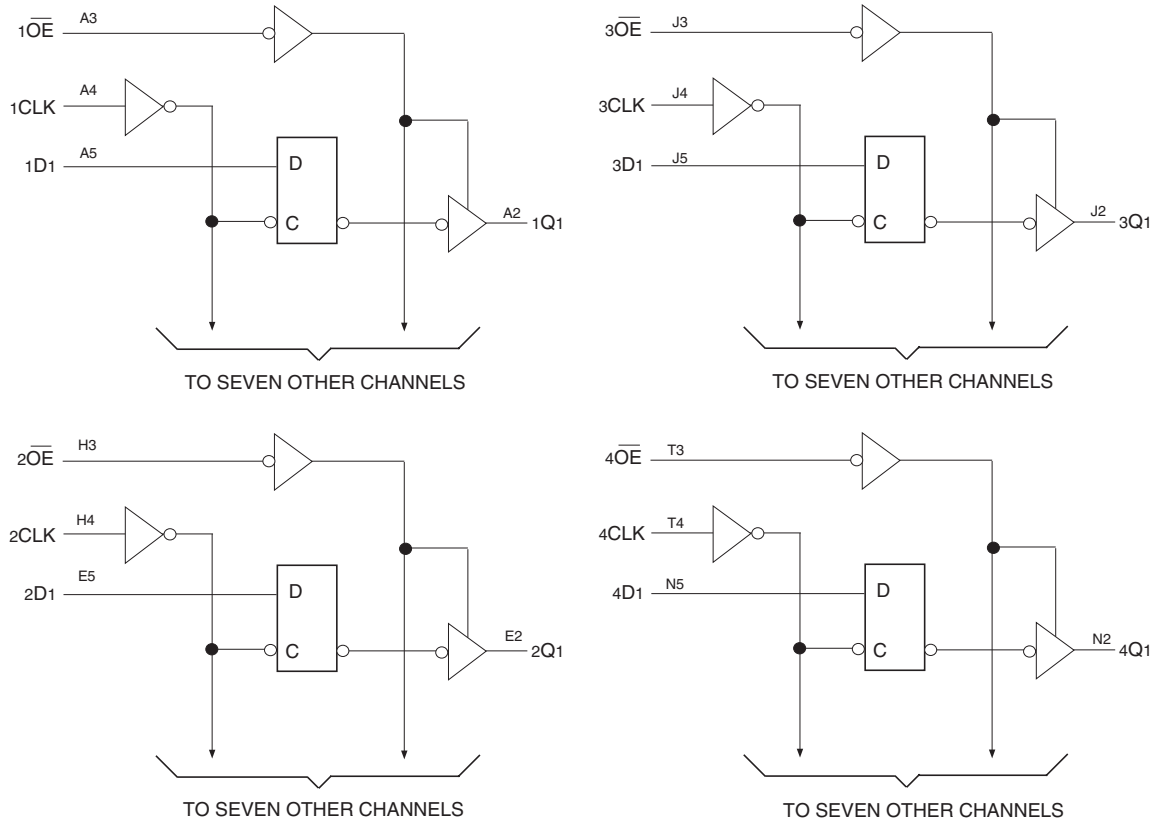

The IDT logo is a registered trademark of Integrated Device Technology, Inc.


© 2019 Renesas Electronics Corporation

PIN CONFIGURATION

	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	T
6	1D2	1D4	1D6	1D8	2D2	2D4	2D6	2D7	3D2	3D4	3D6	3D8	4D2	4D4	4D6	4D7
5	1D1	1D3	1D5	1D7	2D1	2D3	2D5	2D8	3D1	3D3	3D5	3D7	4D1	4D3	4D5	4D8
4	1CLK	GND	VCC	GND	GND	VCC	GND	2CLK	3CLK	GND	VCC	GND	GND	VCC	GND	4CLK
3	$1\overline{OE}$	GND	VCC	GND	GND	VCC	GND	$2\overline{OE}$	$3\overline{OE}$	GND	VCC	GND	GND	VCC	GND	$4\overline{OE}$
2	1Q1	1Q3	1Q5	1Q7	2Q1	2Q3	2Q5	2Q8	3Q1	3Q3	3Q5	3Q7	4Q1	4Q3	4Q5	4Q8
1	1Q2	1Q4	1Q6	1Q8	2Q2	2Q4	2Q6	2Q7	3Q2	3Q4	3Q6	3Q8	4Q2	4Q4	4Q6	4Q7

LFBGA
TOPVIEW

96 BALL LFBGA PACKAGE ATTRIBUTES

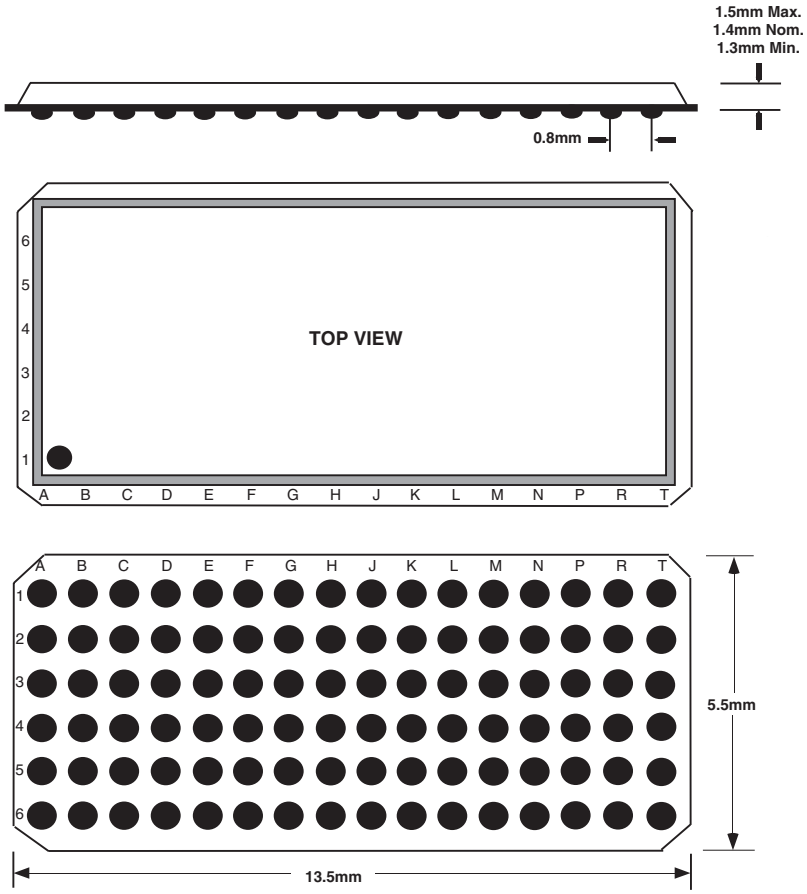

© 2019 Renesas Electronics Corporation

ABSOLUTE MAXIMUM RATINGS(1)

Symbol	Description	Max	Unit
V_{TERM}(2)	Terminal Voltage with Respect to GND	–0.5 to +4.6	V
V_{TERM}(3)	Terminal Voltage with Respect to GND	–0.5 to V_{CC}+0.5	V
T_{STG}	Storage Temperature	–65 to +150	°C
I_{OUT}	DC Output Current	–50 to +50	mA
I_{IK}	Continuous Clamp Current, V_I < 0 or V_I > V_{CC}	±50	mA
I_{OK}	Continuous Clamp Current, V_O < 0	–50	mA
I_{CC} I_{SS}	Continuous Current through each V_{CC} or GND	±100	mA

NOTES:
1. Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.
2. V_{CC} terminals.
3. All terminals except V_{CC}.

CAPACITANCE (T_A = +25°C, F = 1.0MHz)

Symbol	Parameter(1)	Conditions	Typ.	Max.	Unit
C_{IN}	Input Capacitance	V_{IN} = 0V	5	7	pF
C_{OUT}	Output Capacitance	V_{OUT} = 0V	7	9	pF
$C_{I/O}$	I/O Port Capacitance	V_{IN} = 0V	7	9	pF

NOTE:
1. As applicable to the device type.

PIN DESCRIPTION

Pin Names	Description
xDx	Data Inputs(1)
xCLK	Clock Inputs
xQx	3-State Outputs
$\overline{xOE}$	3-State Output Enable Inputs (Active LOW)

NOTE:
1. These pins have "Bus-Hold". All other pins are standard inputs, outputs, or I/Os.

FUNCTION TABLE (EACH FLIP-FLOP)(1)

Inputs			Outputs
$\overline{xOE}$	xCLK	xDx	xQx
L	↑	H	H
L	↑	L	L
L	H or L	X	Q(2)
H	X	X	Z

NOTES:
1. H = HIGH Voltage Level
   L = LOW Voltage Level
   X = Don't Care
   Z = High Impedance
   ↑ = LOW-to-HIGH Transition
2. Output level of Q before the indicated steady-state conditions were established.

© 2019 Renesas Electronics Corporation

DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE

Following Conditions Apply Unless Otherwise Specified:
Operating Condition: T_A = –40°C to +85°C

Symbol	Parameter	Test Conditions		Min.	Typ.(1)	Max.	Unit
V_{IH}	Input HIGH Voltage Level	V_{CC} = 2.3V to 2.7V		1.7	—	—	V
		V_{CC} = 2.7V to 3.6V		2	—	—	
V_{IL}	Input LOW Voltage Level	V_{CC} = 2.3V to 2.7V		—	—	0.7	V
		V_{CC} = 2.7V to 3.6V		—	—	0.8	
I_{IH}	Input HIGH Current	V_{CC} = 3.6V	V_I = V_{CC}	—	—	±5	µA
I_{IL}	Input LOW Current	V_{CC} = 3.6V	V_I = GND	—	—	±5	µA
I_{OZH}	High Impedance Output Current	V_{CC} = 3.6V	V_O = V_{CC}	—	—	±10	µA
I_{OZL}	(3-State Output pins)		V_O = GND	—	—	±10	
V_{IK}	Clamp Diode Voltage	V_{CC} = 2.3V, I_{IN} = –18mA		—	–0.7	–1.2	V
V_H	Input Hysteresis	V_{CC} = 3.3V		—	100	—	mV
I_{CCL} I_{CCH} I_{CCZ}	Quiescent Power Supply Current	V_{CC} = 3.6V V_{IN} = GND or V_{CC}		—	0.1	40	µA
ΔI_{CC}	Quiescent Power Supply Current Variation	One input at V_{CC} - 0.6V, other inputs at V_{CC} or GND		—	—	750	µA

NOTE:
1. Typical values are at V_{CC} = 3.3V, +25°C ambient.

BUS-HOLD CHARACTERISTICS

Symbol	Parameter(1)	Test Conditions		Min.	Typ.(2)	Max.	Unit
I_{BHH}	Bus-Hold Input Sustain Current	V_{CC} = 3V	V_I = 2V	–75	—	—	µA
I_{BHL}			V_I = 0.8V	75	—	—	
I_{BHH}	Bus-Hold Input Sustain Current	V_{CC} = 2.3V	V_I = 1.7V	–45	—	—	µA
I_{BHL}			V_I = 0.7V	45	—	—	
I_{BHHO}	Bus-Hold Input Overdrive Current	V_{CC} = 3.6V	V_I = 0 to 3.6V	—	—	±500	µA
I_{BHLO}							

NOTES:
1. Pins with Bus-Hold are identified in the pin description.
2. Typical values are at V_{CC} = 3.3V, +25°C ambient.

© 2019 Renesas Electronics Corporation

OUTPUT DRIVE CHARACTERISTICS

Symbol	Parameter	Test Conditions[1]		Min.	Max.	Unit
V_{OH}	Output HIGH Voltage	V_{CC} = 2.3V to 3.6V	I_{OH} = – 0.1mA	V_{CC} – 0.2	—	V
		V_{CC} = 2.3V	I_{OH} = – 6mA	2	—	
		V_{CC} = 2.3V	I_{OH} = – 12mA	1.7	—	
		V_{CC} = 2.7V		2.2	—	
		V_{CC} = 3V		2.4	—	
		V_{CC} = 3V	I_{OH} = – 24mA	2	—	
V_{OL}	Output LOW Voltage	V_{CC} = 2.3V to 3.6V	I_{OL} = 0.1mA	—	0.2	V
		V_{CC} = 2.3V	I_{OL} = 6mA	—	0.4	
			I_{OL} = 12mA	—	0.7	
		V_{CC} = 2.7V	I_{OL} = 12mA	—	0.4	
		V_{CC} = 3V	I_{OL} = 24mA	—	0.55	

NOTE:
1. V_{IH} and V_{IL} must be within the min. or max. range shown in the DC ELECTRICAL CHARACTERISTICS OVER OPERATING RANGE table for the appropriate V_{CC} range. T_A = – 40°C to + 85°C.

OPERATING CHARACTERISTICS, T_A = 25°C

Symbol	Parameter	Test Conditions	V_{CC} = 2.5V ± 0.2V	V_{CC} = 3.3V ± 0.3V	Unit
			Typical	Typical	
C_{PD}	Power Dissipation Capacitance Outputs enabled	C_L = 0pF, f = 10Mhz	62	60	pF
C_{PD}	Power Dissipation Capacitance Outputs disabled		32	36	

SWITCHING CHARACTERISTICS[1]

Symbol	Parameter	V_{CC} = 2.5V ± 0.2V		V_{CC} = 2.7V		V_{CC} = 3.3V ± 0.3V		Unit
		Min.	Max.	Min.	Max.	Min.	Max.	
f_{MAX}		150	—	150	—	150	—	MHz
t_{PLH} t_{PHL}	Propagation Delay xCLK to xQx	1	5.3	—	4.9	1	4.2	ns
t_{PZH} t_{PZL}	Output Enable Time $\overline{xOE}$ to xQx	1	6.2	—	5.9	1	4.8	ns
t_{PHZ} t_{PLZ}	Output Disable Time $\overline{xOE}$ to xQx	1	5.3	—	4.7	1.2	4.3	ns
t_{SU}	Setup Time, data before CLK↑	2.1	—	2.2	—	1.9	—	ns
t_H	Hold Time, data after CLK↑	0.6	—	0.5	—	0.5	—	ns
t_W	Pulse Duration, CLK HIGH or LOW	3.3	—	3.3	—	3.3	—	ns
$t_{SK(O)}$	Output Skew[2]	—	—	—	—	—	500	ps


NOTES:
1. See TEST CIRCUITS AND WAVEFORMS. T_A = – 40°C to + 85°C.
2 Skew between any two outputs of the same package and switching in the same direction.

© 2019 Renesas Electronics Corporation

TEST CIRCUITS AND WAVEFORMS

TEST CONDITIONS

Symbol	$V_{CC}^{(1)}$= 3.3V±0.3V	$V_{CC}^{(1)}$= 2.7V	$V_{CC}^{(2)}$= 2.5V±0.2V	Unit
V_{LOAD}	6	6	2 x Vcc	V
V_{IH}	2.7	2.7	Vcc	V
V_T	1.5	1.5	Vcc / 2	V
V_{LZ}	300	300	150	mV
V_{HZ}	300	300	150	mV
C_L	50	50	30	pF

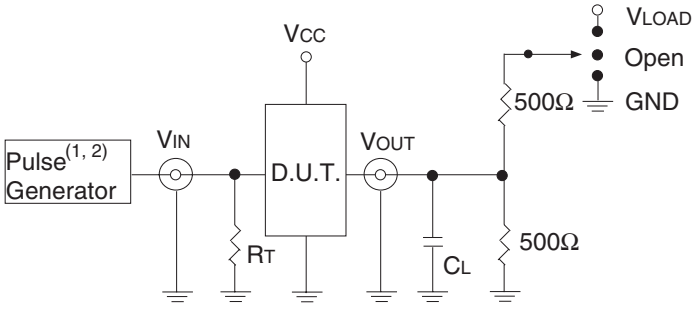

Test Circuit for All Outputs

ALVC Link

DEFINITIONS:


C_L = Load capacitance: includes jig and probe capacitance.
R_T = Termination resistance: should be equal to Z_{OUT} of the Pulse Generator.

NOTES:

1. Pulse Generator for All Pulses: Rate ≤ 1.0MHz; t_F ≤ 2.5ns; t_R ≤ 2.5ns.
2. Pulse Generator for All Pulses: Rate ≤ 1.0MHz; t_F ≤ 2ns; t_R ≤ 2ns.

SWITCH POSITION

Test	Switch
Open Drain Disable Low Enable Low	V_{LOAD}
Disable High Enable High	GND
All Other Tests	Open

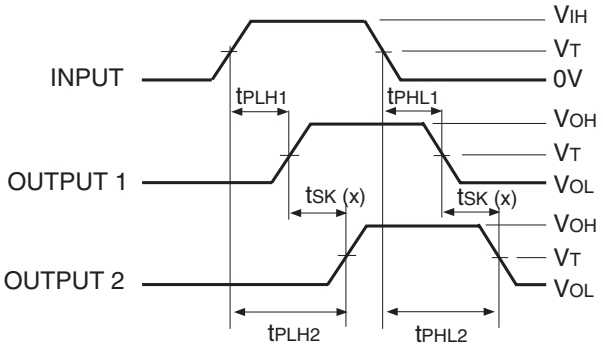


$t_{SK(x)} = |t_{PLH2} - t_{PLH1}|$ or $|t_{PHL2} - t_{PHL1}|$

ALVC Link

Output Skew - $t_{SK(x)}$


NOTES:

1. For t_{SK}(o) OUTPUT1 and OUTPUT2 are any two outputs.
2. For t_{SK}(b) OUTPUT1 and OUTPUT2 are in the same bank.

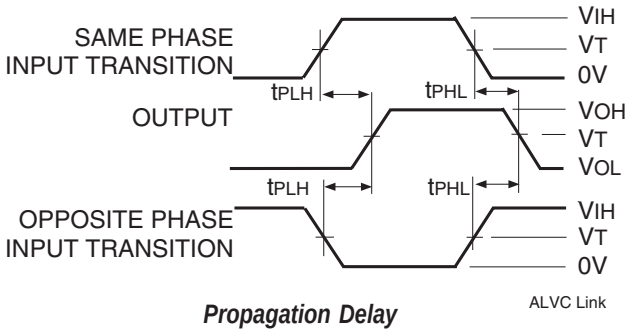

Propagation Delay

ALVC Link

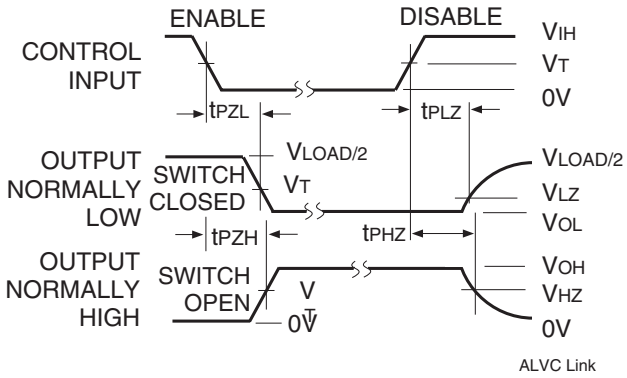


ALVC Link

Enable and Disable Times


NOTE:

1. Diagram shown for input Control Enable-LOW and input Control Disable-HIGH.

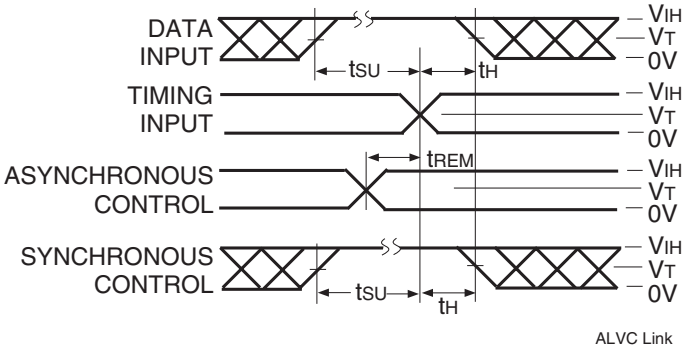

ALVC Link

Set-up, Hold, and Release Times

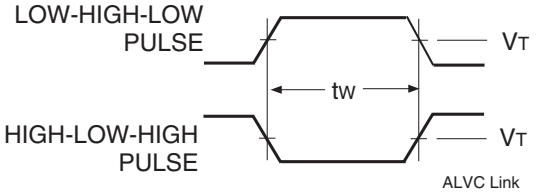


ALVC Link

Pulse Width

© 2019 Renesas Electronics Corporation

ORDERING INFORMATION

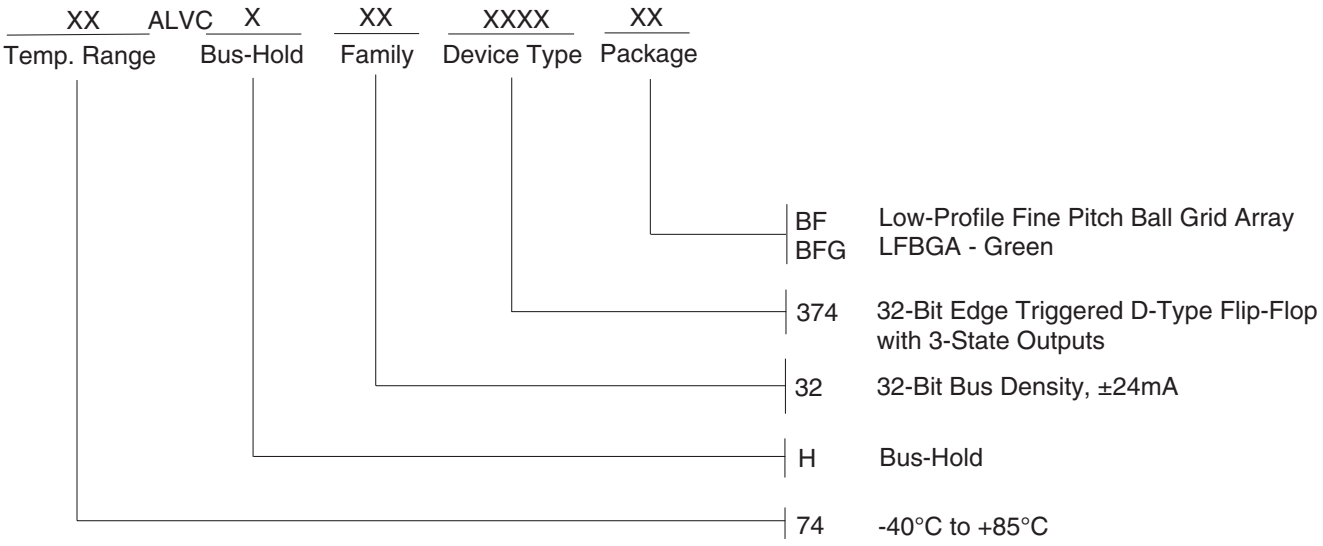

IMPORTANT NOTICE AND DISCLAIMER

RENESAS ELECTRONICS CORPORATION AND ITS SUBSIDIARIES (“RENESAS”) PROVIDES TECHNICAL SPECIFICATIONS AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES “AS IS” AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for developers skilled in the art designing with Renesas products. You are solely responsible for (1) selecting the appropriate products for your application, (2) designing, validating, and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. Renesas grants you permission to use these resources only for development of an application that uses Renesas products. Other reproduction or use of these resources is strictly prohibited. No license is granted to any other Renesas intellectual property or to any third party intellectual property. Renesas disclaims responsibility for, and you will fully indemnify Renesas and its representatives against, any claims, damages, costs, losses, or liabilities arising out of your use of these resources. Renesas' products are provided only subject to Renesas' Terms and Conditions of Sale or other applicable terms agreed to in writing. No use of any Renesas resources expands or otherwise alters any applicable warranties or warranty disclaimers for these products.

(Rev.1.0 Mar 2020)

Corporate Headquarters

TOYOSU FORESIA, 3-2-24 Toyosu,
Koto-ku, Tokyo 135-0061, Japan
www.renesas.com

Contact Information

For further information on a product, technology, the most up-to-date version of a document, or your nearest sales office, please visit:
www.renesas.com/contact/

Trademarks

Renesas and the Renesas logo are trademarks of Renesas Electronics Corporation. All trademarks and registered trademarks are the property of their respective owners.

© 2020 Renesas Electronics Corporation. All rights reserved.