



RDM
Control

100W
LED

ZOOM

Flicker Free

96
TLCI

95
CRI

EVENT 100T

100W tunable white LED fresnel zoom

EVENT 100T is a tunable white LED fresnel light with zoom. It's powered by 100W 2700K - 6000K LED source and zoom lens. The fixture comes with average high CRI over 95, TLCI over 96. Barndoor and color frame is included in delivery. The fixture is super compact for small exhibitions.


Key features:

- 200W LED (100W WW + 100W CW), 100W constant output
- 2700K - 6000K color temperature
- Average CRI 95, TLCI 96
- 25° - 60° zoom lens, single side zoom
- Flicker free with selectable PWM
- Rotary, key, DMX control of dimmer
- Intelligent fan, silent operation for studio and theatre use
- Super compact body, only 2.5 kg, easy to install and setup
- Powercon TR1 in, DMX in & out

Application:

- Broadcast, HD studio
- Theatre, church
- Fashion show
- Museum
- Exhibition


Accessories:



barn door




Gel frame

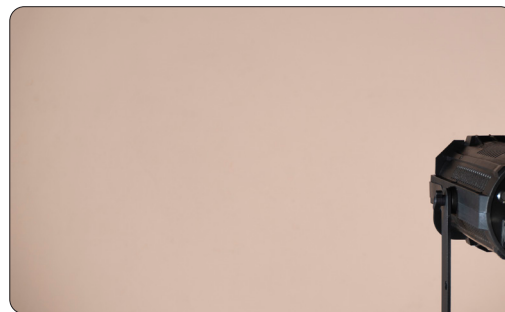


Photometric

ww(lx)	10500	3340	1470	838	519	357	293	224	192	159
cw(lx)	11800	3870	1670	960	610	404	339	271	221	181

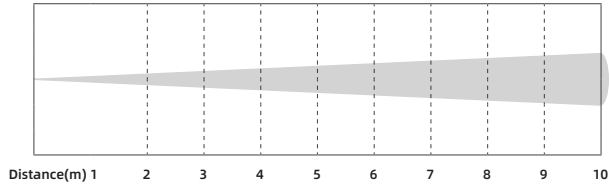


Minimum Spot - 25°


Color Rendition 4000K

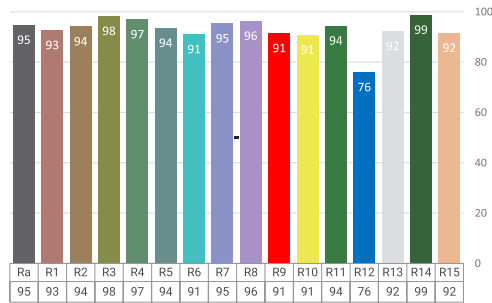

ww(lx)	2260	728	308	180	123	91.4	69.4	55.7	41.6	36
cw(lx)	2400	771	338	201	131	104	77.3	60.7	46.8	37.1

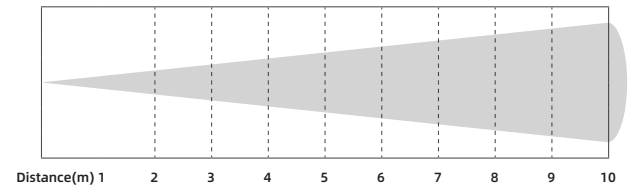

Maximum Spot - 60°

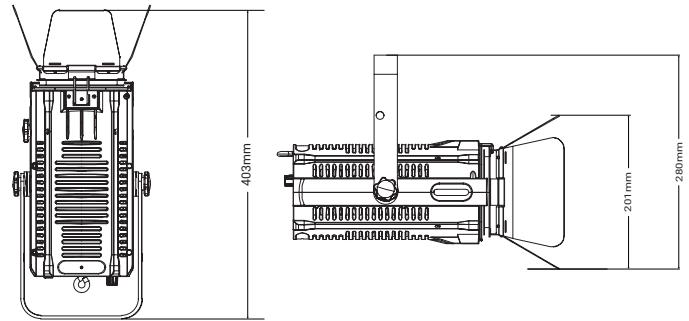

Technical Data

Power supply:	AC100 - 240V, 50/60Hz
Light source:	200W LED (100W WW + 100W CW)
Color temperature:	2700K - 6000K tunable
Zoom range:	25° - 60° manual zoom
Color Rendition:	CRI 95, TLCI 96(2900K)
Power connection:	PowerCON TR1 in
Signal connection:	3-pin XLR in & out
Control channels:	1/2/3/5

Control mode:	Rotary, DMX, RDM
Housing:	Color black, engineering plastic
Size:	403 x 180 x 124mm
N.W.:	2.5 kg
G.W.:	4 kg
Accessories(incl.):	Power cable, barndoor, gel frame, Safety rope
Environment:	IP20